

January 19, 2011

BY RESS & COURIER

Ms. Kirsten Walli, Board Secretary Ontario Energy Board 2300 Yonge Street, Suite 2700 Toronto, Ontario M4P 1E4

Dear Ms. Walli:

Re: Union Gas Limited
Jacob Pool Storage Development
ED 2011 0012 ED 2011 0014 ED 2011 0015

EB-2011-0013, EB-2011-0014, EB-2011-0015

Please find enclosing Union's Application and pre-filed evidence with respect to the above project.

Two hard copies of same will follow by courier.

Sincerely,

"original signed by"

Mary Jane Patrick, Administrative Analyst, Regulatory Projects :mjp Encl.

cc. Zorz Crnojacki, Project Advisor

ONTARIO ENERGY BOARD

IN THE MATTER OF the Ontario Energy Board Act, 1998, S.O. 1998, c.15, Schedule B; and in particular sections 90, 36.1(1), 38(1) and 40(1) thereof.

AND IN THE MATTER OF an Application by Union Gas Limited for a regulation designating the area known as the Jacob Pool, in the Municipality of Chatham-Kent, as a gas storage area;

AND IN THE MATTER OF an Application by Union Gas Limited for authority to inject gas into, store gas in and remove gas from the Jacob Pool, and to enter into and upon the lands in the said area and use the said lands for such purposes;

AND IN THE MATTER OF an Application by Union Gas Limited to the Ministry of Natural Resources for licences to drill wells in the said area;

AND IN THE MATTER OF an Application by Union Gas Limited for leave to construct a natural gas pipeline and ancillary facilities in the Municipality of Chatham-Kent

UNION GAS LIMTED

- 1. Union Gas Limited (the "Applicant") is seeking an Order designating as a gas storage area, the lands which contain the geological formation in the Municipality of Chatham-Kent, referred to as the Jacob Pool.
- 2. The Applicant is also applying for an Order for leave to construct approximately 4,712 metres of NPS 8 transmission pipeline and 1,829 metres of NPS 6 and 8 gathering pipelines.
- 3. The Applicant also applies to the Board pursuant to section 38(1) of the Act for an order granting the right to inject gas into, store gas in and remove gas from the Jacob Pool, and enter into and upon the lands in the area for such purposes.

- 4. Pursuant to section 40(1) of the Act, the Applicant seeks a favourable report from the Board to the Ministry of Natural Resources to which Union has applied for licences to drill three (3) injection/withdrawal wells within the proposed designated storage areas of the Jacob Pool.
- 5. Attached hereto as Schedule "A" is the description of the lands within the Jacob Pool for which designation is sought.
- 6. Attached hereto as Schedule "B" is a map showing the general location of the proposed designated storage areas for the Jacob Pool, the proposed gathering pipelines, and the proposed transmission pipelines.
- 7. In order to meet the proposed in-service date of August 3, 2012 for the Jacob Pool, the Applicant must order pipeline materials by August of 2011. The Applicant therefore applies to the Board for a timely approval of this Application.

Dated at the Municipality of Chatham-Kent, Ontario this <u>17</u> day of January, 2011.

Per: Dan Jones, Assistant General Counsel

Comments respecting this Application should be directed to:

Mark Murray

Manager, Regulatory Projects & Lands Acquisition

Union Gas Limited 50 Keil Drive North Chatham, Ontario

N7M 5M1

Telephone: 519-436-4601 Fax: 519-436-4641

Email:

mmurray@spectraenergy.com

UNIONregulatoryproceedings@uniongas.com

Dan Jones

Assistant General Counsel

Union Gas Limited 50 Keil Drive North Chatham, Ontario

N7M 5M1

Telephone: 519-436-5396 Fax: 519-436-5218

Email:

dxjones1@uniongas.com

SCHEDULE A

ALL AND SINGULAR that certain parcel or tract of land in the Geographical Township of Dover, now in the Municipality of Chatham-Kent and being composed of part of Lots 4 and 5, Concession 5 and part of Lots 4, 5, 6 and 7, Concession 4, part of the road allowance between Lots 5 and 6, Concession 4 and part of the road allowance between Concession 4 and 5 all in the Geographical Township of Dover, now in the Municipality of Chatham-Kent, which said parcel may be more particularly described as follows...

COMMENCING at the north-westerly corner of Lot 4, Concession 4. Thence south-easterly along the line between Lots 3 and 4, on a bearing of south 41 degrees 20 minutes and 10 seconds east, a distance of 345.50 metres to the line between the north and south half of the north half of Lot 4, Concession 4;

THENCE north-easterly along the line between the north and south half of the north half of Lot 4 Concession 4, on a bearing of north 48 degrees 56 minutes and 30 second east, a distance of 618.92 metres to the line between Lots 4 and 5, Concession 4;

THENCE south-easterly along the line between Lots 4 and 5, Concession 4 on a bearing of south 41 degrees 41 minutes 40 seconds east, a distance of 346.83 metres to the line between the north and south half of Lot 5, Concession 4;

THENCE north-easterly along the line between the north and south half of Lot 5, Concession 4, on a bearing of north 48 degrees 18 minutes and 0 seconds east, a distance of 313.35 metres to the line between the east and west half of Lot 5, Concession 4;

THENCE south-easterly along the line between the east and west half of Lot 5, Concession 4 on a bearing of south 41 degrees 26 minutes 20 seconds east, a distance of 345.22 metres to the line between the north and south half of the south half of Lot 5, Concession 4:

THENCE north-easterly along the line between the north and south half of the south half of Lot 5, Concession 4, continuing across the road allowance between Lots 5 and 6, Concession 4, and continuing on the line between the north and south half of the south half of Lot 6, Concession 4, on a bearing of north 48 degrees 5 minutes and 50 seconds east, a distance of 646.84 metres to the line between the east and west half of Lot 6, Concession 4;

THENCE south-easterly along the line between the east and west half of Lot 6, Concession 4, on a bearing of south 41 degrees 59 minutes 30 seconds east, a distance of 345.42 metres to a point in the northerly limit of the road allowance between Concessions 3 and 4 being Pain Court Line;

THENCE north-easterly along the northerly limit of the road allowance between Concessions 3 and 4 being Pain Court Line on a bearing of north 48 degrees 17 minutes 40 seconds east, a distance of 952.84 metres to the south easterly corner of Lot 7, Concession 4;

THENCE north-westerly along the line between Lots 7 and 8, Concession 4, on a bearing of north 41 degrees 31 minutes and 30 seconds west, a distance of 677.36 metres to the line between the north and south half of Lot 7, Concession 4;

THENCE south-westerly along the line between the north and south half of Lot 7, Concession 4, on a bearing of south 48 degrees 50 minutes 10 seconds west, a distance of 315.83 metres to the line between the east and west half of Lot 7, Concession 4;

THENCE north-westerly along the line between the east and west half of Lot 7, Concession 4, on a bearing of north 41 degrees 31 minutes 30 seconds west, a distance of 342.04 metres to the line between the north and south half of the north half of Lot 7, Concession 4;

THENCE south-westerly along the line between the north and south half of the north half of Lot 7, Concession 4 and continuing on along the line between the north and south half of the north half of Lot 6, Concession 4, on a bearing of south 48 degrees 50 minutes 10 seconds west, a distance of 641.42 metres to the line between the east and west half of Lot 6, Concession 4;

THENCE north-westerly along the line between the east and west half of Lot 6, Concession 4, on a bearing of north 41 degrees 29 minutes 10 seconds west, a distance of 342.04 metres to the southerly limit of the road allowance between Concessions 4 and 5, being Maple Line.

THENCE south-westerly along the southerly limit of the road allowance between Concessions 4 and 5, being Maple Line, on a bearing of south 48 degrees 53 minutes 40 seconds west, a distance of 340.25 metres to a point in the southerly limit of said road allowance in the northerly limit of Lot 5, Concession 4;

THENCE north-westerly crossing the road allowance between Concessions 4 and 5, being Maple Line and continuing along the widened limit of the road allowance between Lots 5 and 6, Concession 5, on a bearing of north 40 degrees 17 minutes and 20 seconds west, a distance of 369.05 metres to a point in that widened limit to the line between the north and south half of the south half of Lot 5, Concession 5;


THENCE south-westerly along the line between the north and south half of the south half of Lot 5, Concession 5, on a bearing of south 48 degrees 59 minutes 50 seconds west, a distance of 298.41 metres to a point in the east and west half of Lot 5, Concession 5;

THENCE north-westerly along the line between the east and west half of Lot 5, Concession 5, on a bearing of north 41 degrees 1 minute 40 seconds west, a distance of 344.56 metres to a point in the southerly limit of Given Line;

THENCE south-westerly along the southerly limit of Given Line, on a bearing of south 48 degrees 59 minutes 50 seconds west, a distance of 921.90 metres to the line between Lots 3 and 4, Concession 5;

THENCE south-westerly along the line between Lots 3 and 4, Concession 5, on a bearing of south 41 degrees 10 minutes 10 seconds east, a distance of 694.92 metres to the southwest corner of Lot 4, Concession 5;

THENCE southerly crossing the road allowance between Concessions 4 and 5, being Maple Line, on a bearing of south 7 degrees 54 minutes 0 seconds west, a distance of 30.64 metres to the point of commencement.

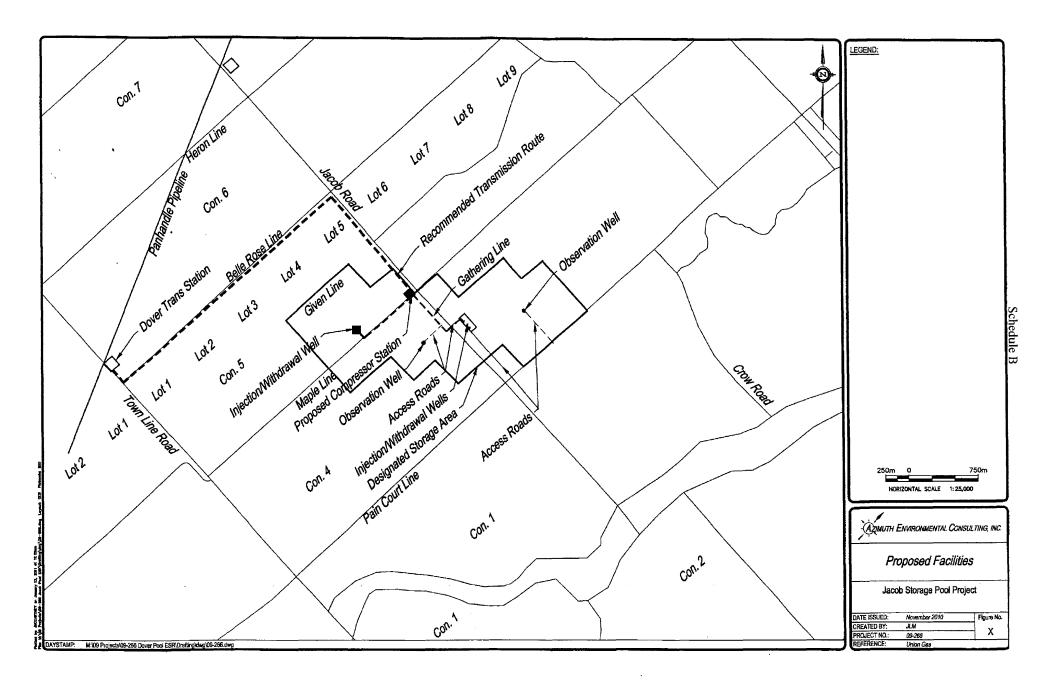

March 15, 2011

NOTATION: The application and pre-filed evidence on public record were modified so that any personal (i.e. not business) contact information (i.e. the address, fax number, phone number and email address of the individuals) are not included in the public record. Accordingly the Schedules as noted below and marked with an "X" have been made confidential.

<u>Index</u>

Application for Leave to Construct

- Schedule A Metes & Bounds
- Schedule B Map of Jacob Pool, Proposed Pipeline and Wells

Section 1 - Project Summary

Section 2 - Need for Facilities

Section 3 - Geology and Reservoir Engineering

- Schedule 1 Dover 7-5-VE Field Map
- Schedule 2 Trenton/Black River Pools Map
- Schedule 3 Trenton Fault/Structure Map
- Schedule 4 Cross-section Through Reservoir
- Schedule 5 Well Location Map
- Schedule 6 Well Information and Schematics
- Schedule 7 Seismic Coverage Map
- Schedule 8 PC1 Well Schematic
- Schedule 9 PC1 Core Testing Results
- Schedule 10 Proposed Designated Storage Area Map
- Schedule 11 Map of Additional lands in DSA
- Schedule 12 MNR Review of DSA
- Schedule 13 Gas Production and Pressure History
- Schedule 14 Production Decline Curve

Section 4 - Proposed Facilities

• X - Schedule 1 General Location Map

- X Schedule 2 MNR Well Application and survey
- Schedule 3 Drilling Procedure
- Schedule 4 Casing Program
- Schedule 5 Design and Pipe Specifications
- Schedule 6 General Techniques & Methods of Construction
- Schedule 7 Construction Schedule

Section 5 - Proposed Storage Operation

• Schedule 1 Proposed Monitoring Program

Section 6 - Environmental Matters

- Schedule 1 Environmental Report
- Schedule 2 OPCC Summary
- Schedule 3 Estimated Environmental Costs

Section 7 - Land Matters

- Schedule 1 Metes and bounds description of DSA
- X Schedule 2 Directly affected landowners P&NG Agreements
- X Schedule 3 Directly affected landowners Gas Storage Agreements
- X Schedule 4 Landowners & interested parties within proposed DSA
- X Schedule 5 Landowner Listing for Pipeline Easement
- Schedule 6 Proposed Form of Easement
- X Schedule 7 Landowner list for gathering pipeline and Temporary Land Use
- X Schedule 8 Maps of Access Roads, Well Pads and Gathering Lines
- X Schedule 9 Letters of Acknowledgement

SECTION 1

PROJECT SUMMARY

- 1. The Jacob Pool ("Jacob Pool") will add an additional 2.45 Bcf of storage capacity to Union Gas Limited's ("Union") integrated storage system.
- 2. The proposed facilities include:
 - a) One new single leg horizontal injection/withdrawal ("I/W") well;
 - b) One new horizontal multilateral I/W well with two legs;
 - c) Converting the existing stratigraphic test well drilled in 2010 to an I/W well;
 - d) Converting one existing well to an I/W well;
 - e) Converting two existing wells to observation wells;
 - f) 4,712 metres of NPS 8 transmission pipeline from the existing Dover Transmission Station to the Jacob Pool compressor station;
 - g) 1,829 metres of NPS 6 and NPS 8 gathering pipelines to transport natural gas from the new compressor station to the I/W wells that will be used to inject and withdraw natural gas; and,
 - h) Modifications at the existing Dover Transmission Station to tie into the Panhandle system and a new compressor and metering station at the corner of Maple Line and Jacob Road.
- 3. Union will be the owner, operator and developer of the Jacob Pool and related storage facilities.
- 4. Union is seeking an Order designating as a gas storage area, the lands which contain the geological formation in the Municipality of Chatham-Kent, referred to as the Jacob Pool. Union is seeking an Order from the Board granting the right to inject gas into, store gas in and remove gas from the Jacob Pool

- 5. Union is also applying to the Board for leave to construct approximately 4,712 metres of NPS 8 transmission pipeline and 1,829 metres of NPS 6 and 8 gathering pipelines.
- 6. Union is also requesting that the Board issue a favourable report to the Minister of Natural Resources to enable the Minister to issue licenses to drill a total of three natural gas storage wells within the lands that comprise the Jacob Pool. Union has applied to the Ministry of Natural Resources ("MNR") for these licenses.
- 7. An Environmental Report ("ER") has been prepared for the proposed facilities. The ER will be provided to the Ontario Pipeline Coordination Committee ("OPCC"), local municipalities, the St. Clair Region Conservation Authority, local First Nations and Metis. Directly affected landowners received a copy of the Executive Summary of the ER and will be provided with a copy of the ER upon request. The ER outlines a number of environmental mitigation measures that, in conjunction with Union's standard pipeline construction and well drilling specifications, will allow construction of the proposed facilities with minimal impact to the environment.
- 8. Operation of the Jacob Pool is scheduled to begin no later than August 3, 2012. In order to meet this in-service date, Union plans to order well casing, wellhead and gathering pipeline materials in November, 2011. Union plans to order pipeline materials from August 22, 2011 to February 17, 2012. Well drilling is scheduled to begin on January 9, 2012 and Union plans to commence construction of the pipelines by April 27, 2012.
- 9. In order to meet this construction timetable, a Board Decision and a favourable report to the Minister of Natural Resources by August 1, 2011 is respectfully requested.

SECTION 2

NEED FOR FACILITIES

- 1. Union believes that storage expansion is necessary to efficiently serve growing natural gas demand in the Ontario, eastern Canadian and U.S. Northeast markets, and that the long term demand for storage exceeds the available supply.
- 2. A number of authorities have identified the need to develop additional storage¹.
 - The National Energy Board² identified several factors supporting the need for more storage, including growing needs for gas fired power generation, and balancing LNG deliveries (primarily due to LNG arriving in North America in the summer).
 - The Federal Energy Regulatory Commission noted that natural gas storage expansion will act to reduce price volatility and assure that peak demand can be met³ and
 - The Interstate Natural Gas Association of America noted that a significant increase in the amount of gas storage capacity will be required to meet growing peak month demand and the need for high deliverability storage to serve the requirements of power generation.⁴
- 3. During its Natural Gas Market Review, the Boards study concluded that by 2020, the power sector is projected to make up nearly one-third of the total Ontario demand.⁵ Ontario storage will continue to provide daily balancing services to manage swing load requirements for power generation.
- 4. The Board has previously recognized the value of Ontario storage. In its Natural Gas Electricity Interface Review decision the Board stated that the further development of

¹ NGEIR Decision, at p. 48.

² National Supply & Demand Scenarios: Putting Gas Storage Into Context, NEB Presentation, Sheila Leggett, Vice-Chair National Energy Board, October 1, 2008 as posted at http://www.neb-one.gc.ca/clf-nsi/rpblctn/spchsndprsnttn/spchsndprsnttn/2008-eng.html

³ Rate Regulation of Certain Underground Storage Facilities, "Notice of Proposed Rulemaking", FERC Stats. & Regs. 113 FERC**61,306 (2005), pp. 7-10; and Rate Regulation of Certain Underground Storage Facilities, Final Rule, Order No. 678, 115 FERC**61,343 (June 19, 2006), at pp. 5 and 6.

Pipeline and Storage Infrastructure for a 30 Tcf Market, Interstate Natural Gas Association of America, January 2002, at p 43.

⁵ 2010 Natural Gas Market Review, ICF International, August 18, 2010, p. 8.

storage would benefit Ontario consumers in terms of reduced price volatility, enhanced security of supply and an overall enhanced competitive market at Dawn.⁶

- 5. Union Gas believes that demand for storage in the geographic region of Michigan, and parts of Illinois, Indiana, New York, Pennsylvania and Ontario will continue to grow for the foreseeable future and views Dawn, to be well positioned to meet future storage demand.
- 6. Union Gas will manage the sale of the storage capacity and deliverability created by the completion of the Jacob Pool consistent with the sale of the rest of Union's ex-franchise storage. This incremental capacity and deliverability will be integrated into the overall Union Gas storage portfolio. Storage services will be marketed through either: i) open season; ii) direct negotiation with a customer; and/or iii) through response to a request for proposal initiated by a customer. Contracts for storage in the Jacob Pool will comply with applicable sections of the Storage and Transportation Access Rule.
- 7. Union Gas is confident that storage will remain a strategic asset in Ontario and that there will be sufficient market demand for the storage services created by the development of the Jacob Pool. Union believes that the facilities proposed and the designation of the lands sought is therefore in the public interest and should proceed as proposed.

⁶ NGEIR Decision, at p. 50.

SECTION 3

GEOLOGY AND RESERVOIR ENGINEERING

1. The Jacob Pool is a depleted natural gas reservoir located in the municipality of Chatham-Kent, north of the Thames River and 10 kilometers west of Chatham, Ontario (Figure 1).

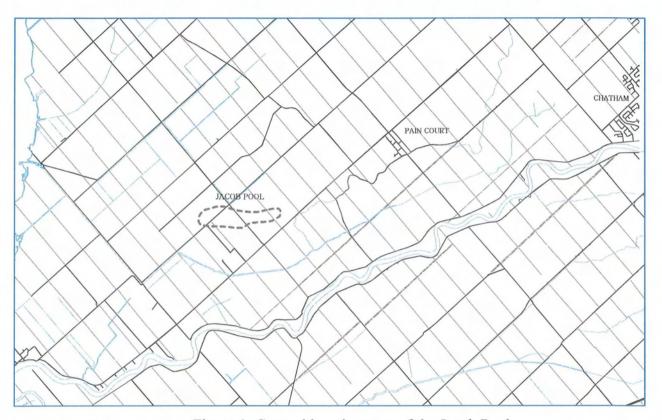


Figure 1: General location map of the Jacob Pool

- 2. The Jacob Pool is the largest gas reservoir within the Dover 7-5-VE Field (Section 3 Schedule 1). The Dover 7-5-VE Field is a series of seven Ordovician Trenton Group reservoirs created by hydrothermal dolomitization along East-West trending fault blocks. The reservoirs are narrow, heterogeneous and elongate along fault trends. The field was discovered in 1983 by E.P. Rowe Oil Limited.
- 3. During the development of the Dover 7-5-VE Field numerous wells targeting both Trenton and Black River Group reservoirs were drilled. The Trenton and Black River Group reservoirs are not connected vertically and overlie one another spatially (Section 3 Schedule 2). Liberty Oil and

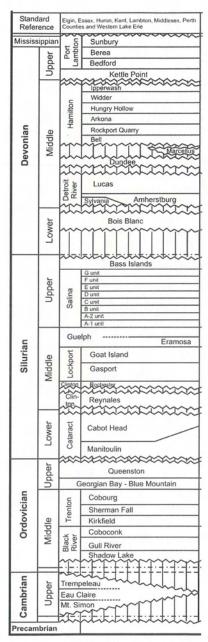


Figure 2: Stratigraphic column for the subsurface of south-western Ontario (modified after Winder and Sanford 1972)

Gas ("Liberty") operates several active wells through and around the proposed Jacob storage pool that produce both oil and/or gas from the Black River Group. Once the Jacob Pool is converted to natural gas storage, Liberty will continue to produce hydrocarbons from the Black River Group.

- 4. The Middle Ordovician rocks in the sub-surface of south-western Ontario are a succession of shallow-water marine carbonates subdivided into the Trenton Group and the Black River Group (Figure 2). These rocks were deposited during a regional marine transgression on a shallowly dipping ramp.
- 5. The Black River Group ranges in thickness to over 150 metres and is located below the targeted storage zone within the Trenton Group. It is comprised of the Shadow Lake, Gull River and Coboconk Formations. The Shadow Lake Formation is a relatively thin unit composed of sililiclastic rocks. The Gull River Formation overlies the Shadow Lake and represents the onset of shallow water carbonate deposition. It is typically a fine grained light grey to brown limestone which may be slightly argillaceous or dolomitic. The Coboconk overlies the Gull River and consists of light brown fossiliferous limestone with varying amounts of argillaceous content.
- 6. Moving up through the sequence, the Trenton Group (targeted storage zone) ranges to over 170 metres thick and is comprised of the Kirkfield, Sherman Fall, and Cobourg Formations. The onset of deposition of Trenton sediments is characterized by an abrupt deepening of water on the carbonate ramp. The Kirkfield Formation consists of bedded fossiliferous limestones with shaly partings. The Sherman Fall

Formation is composed of a lower shaly limestone unit and an upper bioclastic/fragmental limestone unit. The Cobourg Formation overlies the Sherman Fall and is composed of argillaceous light to medium blue/grey/brown limestone.

7. Regionally, the limestones of the Trenton and Black River Groups are not significant producers of oil, natural gas or water unless altered to dolomite. Dolomitization of these limestones occurred when hot basinal brines migrated through the regionally porous Cambrian sandstones and upwards into Trenton and Black River through faults and fractures. This hydrothermal fluid has altered the limestone and locally replaced it with dolomite. The process of dolomitization created porosity and permeability in the rock which forms the reservoirs that subsequently trapped oil and natural gas. Based on the nature of creation of these reservoirs, the distribution of dolomite and porosity is extremely heterogeneous. The most pervasive dolomitization is typically developed in the fragmental portion of the Sherman Fall since it contained more primary porosity than other formations. These reservoirs are vertically confined beneath thick non-porous shales of the Blue Mountain Formation and laterally confined by non-porous limestone. Figure 3 is a model showing the spatial distribution of reservoir rock created by hydrothermal dolomitization.

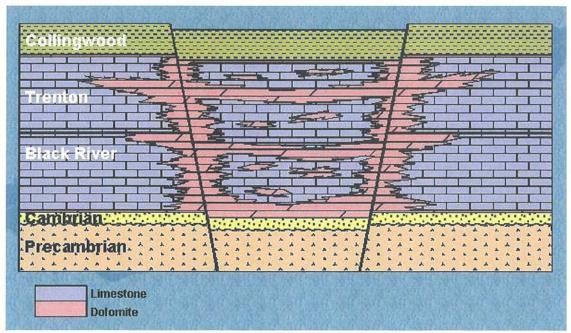


Figure 3: Hydrothermal dolomitization model (Coulter and Waugh, 2002)

Reservoir Description

8. The Jacob Pool is a hydrothermal dolomite reservoir that produced gas from the Middle Ordovician aged carbonates of the Trenton Group. The geometry and internal characteristics of

the Jacob Pool and surrounding formations were interpreted from the 3D seismic survey, 2D seismic lines and well data. The resulting structural map for the top of the Trenton Group is illustrated in Section 3 - Schedule 3. The Jacob Pool reservoir is approximately two kilometres long and 250 - 525 metres in width. The reservoir is confined by faults to the north and south whereas the west and east boundaries are defined by the transition to the regional non-porous limestone.

9. Section 3 - Schedule 4 contains a cross section through the reservoir. The cross section illustrates the dolomitization within the Trenton and Black River Groups. The Trenton Group, including all three formations, is the targeted storage zone for the Jacob Pool. The sequence is 115 metres thick. The Sherman Fall Formation tends to be preferentially dolomitized however reservoir quality rocks may be present throughout the entire Trenton section. Porosity and permeability are extremely variable within the reservoir. Dolomitization decreases away from the faults and the regionally non-porous unaltered carbonate rocks of the Trenton Group provide the lateral seals for the reservoir. The caprock is comprised of the Queenston and Blue Mountain shales overlying the Trenton Group which provide a thick (>225m) impermeable vertical seal to hydrocarbon migration. The shaly limestones at the bottom of the Kirkfield Formation isolate the Trenton Group from the underlying hydrocarbon producing Black River Group. There is no evidence that the Jacob Pool is in communication with the Black River Group below or with adjacent reservoirs in the Trenton Group.

Exploration and Development History

- 10. E.P. Rowe Oil Limited discovered the Dover 7-5-VE Field in February 1983 with the drilling of the Rowe Ram #1 ("RR1") well. The well encountered oil shows in the Coboconk Formation (Black River Group) but was uneconomical to produce.
- 11. The Jacob Pool was discovered in May 1985 with the drilling of Rowe Ram 9 ("RR9"). The well was drilled to a total depth of 1163.0 metres into the PreCambrian Formation. There were gas shows in both the Sherman Fall (Trenton) and Coboconk (Black River) formations but no gas pressures were recorded. The well was originally completed as a Black River gas producer. It produced 301 10³m³ of gas before being converted to a Trenton gas producer in 1988. During this

conversion, the well was plugged back to a depth of 987.0 metres and subsequently produced 9,348 10³m³ of gas. Production ceased in 1999 and the well was converted to a Trenton observation well in 2008.

- 12. Between 1988 and 1992, an additional three Trenton gas wells were drilled into the Jacob Pool. The PPC #14 ("PPC14") well was drilled in January 1988 to a total depth of 1159.2 metres in the PreCambrian Formation. The well was completed as a Trenton gas producer and produced a total of 16,341 10³m³. The well ceased production in 1999 and was abandoned in May 2002 in accordance with Provincial Operating Standards.
- 13. PPC/Ram 34 ("PPCR34") was drilled in August 1991 to a total depth of 1078.0 metres in the Gull River Formation (Black River). The well was completed as a Trenton gas producer and has produced a total of 40,000 10³m³.
- 14. PPC/Ram 39 ("PPCR39") was drilled in May 1992 to a total depth of 1091.0 metres in the Gull River Formation. It produced a total of 383 10³m³ from the Trenton. The well was abandoned in June 2002 in accordance with Provincial Operating Standards.
- 15. In addition to the above, several active wells through and around the proposed Jacob storage pool produce both oil and/or gas from the Black River Group. The wells that are within the reservoir boundary for the Jacob Pool are PPC/Ram 31 ("PPCR31"), Rowe/Ram #8A ("RR8A") and VRI #5 ("VRI5"). The wells that are outside of the Jacob Pool but fall within the proposed Designated Storage Area (DSA) are PPC15 and Rowe/Ram #4 ("RR4").
- 16. The location of each well is shown in Section 3 Schedule 5. Well information and schematics for each well are included in Section 3 Schedule 6.
- 17. A 5.2 km² 3D seismic survey was acquired in 1991. The Jacob Pool is covered by the 3D survey. The 3D seismic survey was a Megabin design with a bin size of 15 metres by 30 metres. The source was 25 grams of dynamite per hole set at approximately 4.5 metres below surface. Source lines and receiver lines ran SW-NE and were set 120 metres apart. Shot intervals were 70 metres along each line and receiver interval was 30 metres. Multiple 2D seismic lines were reprocessed and incorporated into the final interpretation of the seismic data. A seismic coverage map is

included as Section 3 - Schedule 7. Boyd PetroSearch of Calgary completed the interpretation of the seismic data.

- 18. In August 2010, Union drilled a horizontal stratigraphic test well to evaluate the reservoir for potential conversion to storage. Pain Court 1 (Horiz. #1) ("PC1") was drilled to a total measured depth of 1903.0 metres (925.3 metres TVD). A caprock core was retrieved from the lower portion of the Blue Mountain from 903.0 to 911.6 metres measured depth. Results from this well were used to refine the geological and geophysical interpretations. Well information and a schematic of PC1 are included in Section 3 Schedule 8.
- 19. The Blue Mountain shale is a thick (130 140 metres over the Jacob Pool) and competent formation providing excellent sealing properties. However, due to the fissile nature of the caprock, core samples removed during drilling operations have a tendency to break up along the natural bedding planes. As a result a limited number of test samples were available for testing. Three samples were extracted from the core to measure the permeability and threshold pressures. The permeability ranged from 0.0004 mD to 0.0066 mD. The threshold pressure ranged from 439 kPa to 1543 kPa. The test results (Section 3 Schedule 9) for two of the three samples tested are believed to have been adversely affected by poor sample quality.
- 20. The tests results were reviewed with the Ministry of Natural Resources on December 8, 2010. At the Ministry's recommendation Union reviewed other publically available studies conducted for Ontario Power Generation ("OPG") dated November 30, 2008.⁵ Testing conducted for OPG was done to evaluate the construction of a deep geologic repository for radioactive waste at the Bruce site in Southwestern Ontario. The project included: testing, model development, and the completion of several publicly available studies covering the geology of the region. Hydraulic testing was performed as part of these studies on two wells at the Bruce site to determine the hydraulic conductivity (K) coefficient of the underlying formations, including the Blue Mountain shale. The results of the OPG study indicate that the Blue Mountain shale has a hydraulic conductivity value of less than 1.0 x 10E-11 m/s. These tests demonstrate that the Blue Mountain Shale provides an excellent caprock seal above the Jacob Pool.

OPG's Deep Geologic Repository for Low & Intermediate level Waste – Supporting Technical Report – Phase I Regional Hydrogeochemistry, Southern Ontario November 30, 2008 Prepared by M.Y. Hoobs, S.K. Frape, O. Shouakar-Stash, L.R. Kennel, Ontario Power Generation, Department of Earth and Environmental Science, University of Waterloo

Reservoir Deliverability

- 21. A transient pressure test was completed on well PPCR34 by Eastern Reservoir Services in June 1990. The well test consisted of a modified isochronal test followed by an extended buildup. The test results were used to calculate a permeability of 38 millidarcies and an absolute open flow ("AOF") of 105 10³m³ per day. The results of the deliverability test indicate that the well is suitable for conversion to an I/W well.
- 22. A transient pressure test was completed by Genco Engineering in June 1990 on the RR9 well. The test results calculated a permeability of 6.2 millidarcies and an AOF of 3 10³m³ per day. The deliverability of RR9 is not suitable for an I/W well and it will be converted to an observation well.
- 23. Due to the large variation in deliverability across the pool, a stratigraphic test well was drilled to further evaluate the potential deliverability, refine the seismic interpretation, and identify the porosity target zones within the reservoir. During the drilling of PC1, high fluid losses indicative of high permeability were encountered starting at 1793 mKB. Results from the PC1 well drilling supports the deliverability potential and that the proposed I/W wells will be able to cycle the entire working inventory on an annual basis.

Designated Storage Area

- 24. The proposed DSA for the Jacob Pool comprises 273 hectares (675 acres) in Dover Township, Kent County. Section 3 Schedule 10 shows the reservoir outline and the boundary of the proposed DSA in relation to the MNR drilling tracts. The 3D seismic survey and well control to the north, west and south of the pool assisted with determining reservoir boundaries. Since there is no well control to the east of the reservoir, additional 2D seismic lines were reprocessed Section 3 Schedule 7 and interpreted to confirm the reservoir extents beyond the edge of the 3D seismic survey.
- 25. The proposed DSA boundary is larger than the existing Unit Agreement. Additional lands to the north, south, east and west were included in the proposed DSA to adequately protect the storage reservoir. These lands are identified on Section 3 Schedule 11. Distances from the reservoir

boundary to the proposed DSA are shown in Section 3 - Schedule 10. The proposed DSA was discussed and confirmed with MNR staff on December 8th, 2010. MNR review and acceptance of the proposed DSA is included in Section 3 - Schedule 12.

Original Gas In Place

- 26. The original gas in place ("OGIP") of the Jacob Pool was determined using historical pressure versus cumulative production technique. A total of 66,745 10³m³ of gas was produced from PPCR34, PPCR14, RR9 and PPCR39. A table of the gas production and pressure history is included as Section 3 Schedule 13.
- 27. The OGIP was determined using the discovery pressure of 8,026 kPaa bottom hole recorded from PPCR14 in January 1988 and a depleted reservoir pressure of 280 kPaa recorded from well PPCR34 in November 2009. The OGIP was established at 68,130 10³m³ as shown in Schedule 3 Schedule 14. The remaining gas in place is estimated at 1,385 10³m³.

Storage Inventory

28. In the first year of operation, Union is proposing to operate the Jacob Pool to 9,150 kPaa bottom hole. This equates to a pressure gradient of 10.55 kPaa/m. In the second year, the maximum operating pressure will be increased to 10,280 kPaa bottom hole or 11.85 kPaa/m. Union will operate the Jacob Pool at a cushion pressure of 2,170 kPaa. A summary of the estimated storage inventories are shown in Table 1.


Inventory (10 ³ m ³)	Year 1	Year 2
Cushion	15,200	15,200
Working	58,800	69,400
Total	74,000	84,700


Table 1: Estimated Storage Inventories

Assessment of Neighbouring Activities


- 29. An assessment of neighbouring activities within one kilometre and 5 kilometres of the Jacob Pool was conducted to comply with Clause 7.2 of CSA Z341.1-10 and has been submitted to the MNR. The assessment includes an evaluation of existing or abandoned wells within a 1 kilometre radius of the subsurface perimeter of the storage zone, including activities such as fracture treatments that took place within the wells; existing subsurface operations within a 5 kilometre radius of the proposed storage scheme; including their purpose, mode of operation, and minimum and maximum operating pressures; and the integrity of any existing well that penetrates the storage zone, including casing, cement, and the hydraulic isolation of the storage zone from any overlying porous zones.
- 30. The Jacob Pool reservoir has excellent containment properties and will be protected by an approved DSA. The wells and facilities will be designed, constructed, operated, maintained and abandoned in accordance with CSA Z341.1-10 Storage of Hydrocarbons in Underground Formations and in accordance with the *Oil, Gas and Salt Resources Act*, its regulations and Provincial Operating Standards. The technical information reviewed indicates that there is minimal risk with respect to the potential migration of natural gas between any known existing or abandoned wells within 1 km, or any existing subsurface operations within 5 km of the Jacob Pool. All existing wells that are completed within the Trenton Group in the storage zone will be utilized for the Project.


EB-2011-0013\0014\0015 Section 3 - Schedule 1

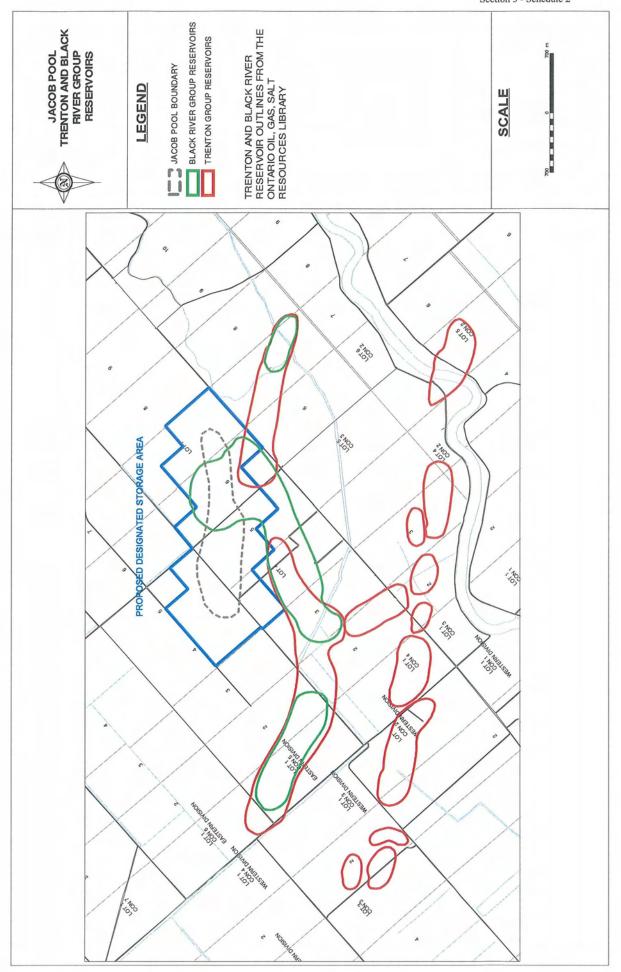

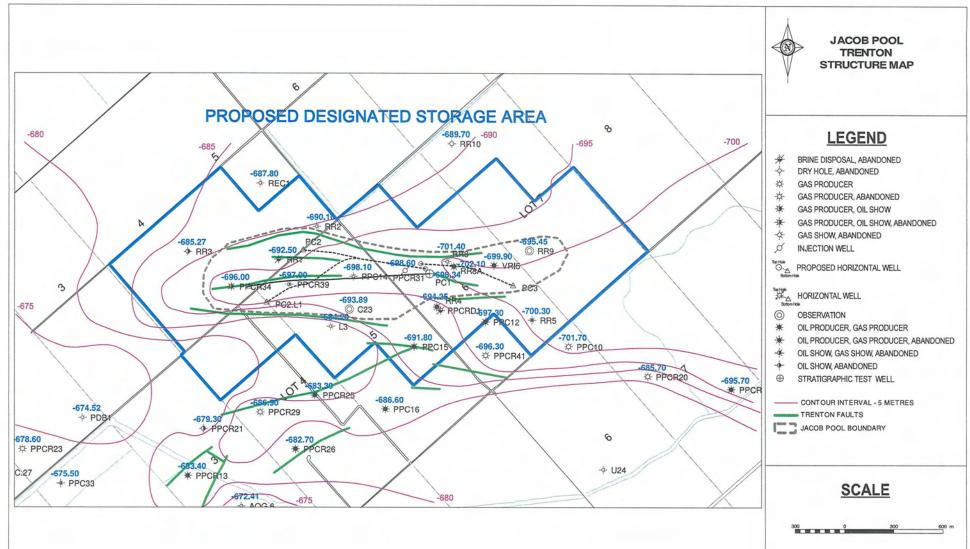

EB-2011-0013\0014\0015 Section 3 - Schedule 3

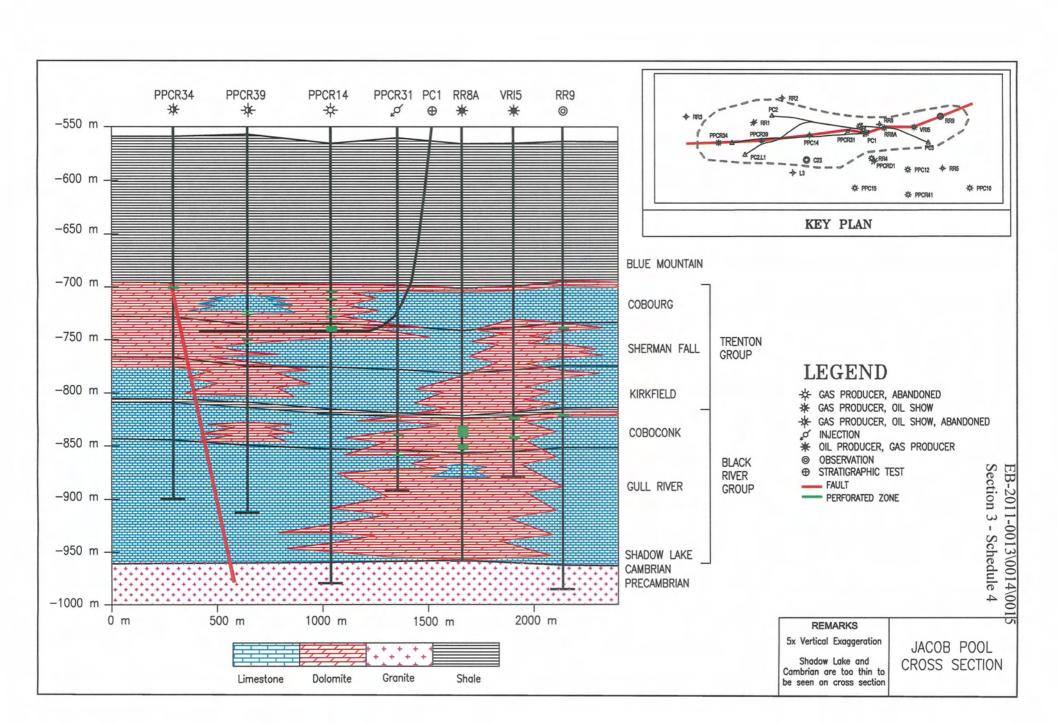

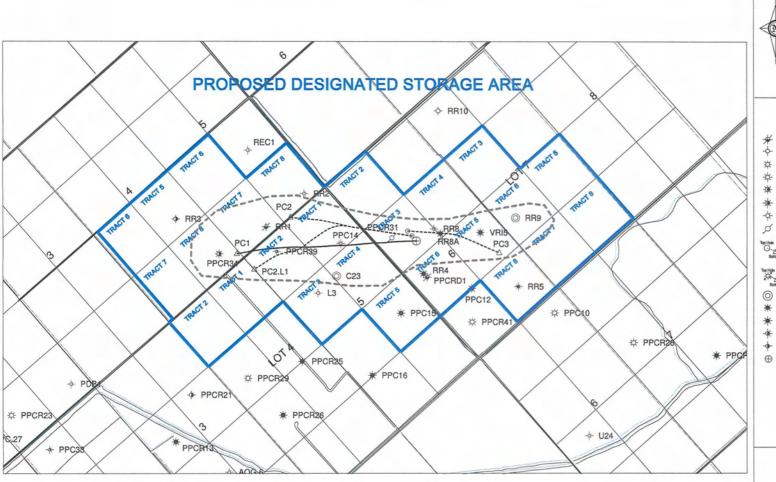



JACOB POOL WELL LOCATION MAP

LEGEND

- BRINE DISPOSAL, ABANDONED
- DRY HOLE, ABANDONED
- GAS PRODUCER
- GAS PRODUCER, ABANDONED
- ★ GAS PRODUCER, OIL SHOW
- GAS PRODUCER, OIL SHOW, ABANDONED
- GAS SHOW, ABANDONED
- S INJECTION WELL

Top-Hobi PROPOSED HORIZONTAL WELL BOTTON HOBI

HORIZONTAL WELL Buttom Hale

- (C) OBSERVATION
- * OIL PRODUCER, GAS PRODUCER
- ♦ OIL PRODUCER, GAS PRODUCER, ABANDONED
- OIL SHOW, GAS SHOW, ABANDONED
 - OIL SHOW, ABANDONED
- ⊕ STRATIGRAPHIC TEST WELL

SCALE

300 0 300 600 m

WELL ID: 4039

WELL NAME: **ROWE RAM 1 DOVER 7-5-VE** SPUD DATE: 1982-11-30 1983-02-08 SHORT NAME: RR1 COMPLETED: COUNTY: **KENT** SURFACE ELEV: 175.00 m TOWNSHIP: DOVER KB ELEV: 176.50 m TRACT: 7 TD: 1028.00 m 5 LOT: WELL STATUS: BD-ABD

CONC: VE

 OPERATOR:
 LATITUDE:
 42.37565


 PERMIT:
 T006059
 LONGITUDE:
 -82.35207


FORMATION	DEPTH (m)	TVD (n	TVE (m)	SOURCE
DRFTLKLV	1.50	1.50	175.00	GEOBASE
HAMILTON	30.00	30.00	146.50	GEOBASE
DUNDEE	84.00	84.00	92.50	GEOBASE
LUCAS	122.00	122.00	54.50	GEOBASE
AMHERBRG	177.00	177.00	-0.50	GEOBASE
BOISBLAC	220.00	220.00	-43.50	GEOBASE
BASSISLD	257.30	257.30	-80.80	GEOBASE
GSHALE	304.70	304.70	-128.20	GEOBASE
FSHALE	311.70	311.70	-135.20	GEOBASE
ECARB	340.00	340.00	-163.50	GEOBASE
CSHALE	387.60	387.60	-211.10	GEOBASE
BMARKER	401.60	401.60	-225.10	GEOBASE
BSALT	419.00	419.00	-242.50	GEOBASE
BANHY	454.70	454.70	-278.20	GEOBASE
A2CARB	458.20	458.20	-281.70	GEOBASE
A2ANHY	488.20	488.20	-311.70	GEOBASE
A1CARB	490.80	490.80	-314.30	GEOBASE
GUELPH	503.00	503.00	-326.50	GEOBASE
GOATISL	527.00	527.00	-350.50	GEOBASE
GASPORT	574.40	574.40	-397.90	GEOBASE
ROCHESTR	589.00	589.00	-412.50	GEOBASE
REYNALES	595.00	595.00	-418.50	GEOBASE
CABTHEAD	597.30	597.30	-420.80	GEOBASE
MANITOUL	631.00	631.00	-454.50	GEOBASE
QUEENSTN	643.80	643.80	-467.30	GEOBASE
BLUEMTN	742.00	742.00	-565.50	GEOBASE
COBOURG	869.00	869.00	-692.50	GEOBASE
SHERMANFALL	907.00	907.00	-730.50	GEOBASE
KIRKFLD	949.50	949.50	-773.00	GEOBASE
COBOCONK	994.00	994.00	-817.50	GEOBASE
GULLRIVR	1,007.40	1,007.40	-830.90	GEOBASE
FTD	1,028.00	1,028.00	-851.50	GEOBASE

Current Schematic complete

Section 3 - Schedule 6

Well Name: Rowe-Ram #1



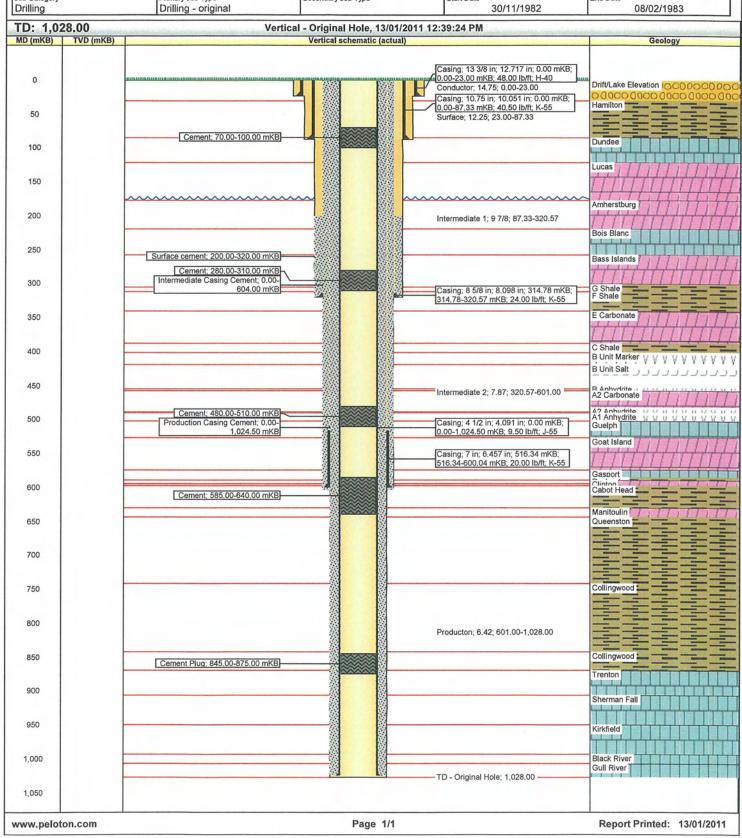

WELL ID: 3988

WELL NAME: **ROWE RAM 9 DOVER 6-7-IVE** SPUD DATE: 1985-05-06 1985-05-14 SHORT NAME: RR9 COMPLETED: SURFACE ELEV: COUNTY: **KENT** 176.05 m TOWNSHIP: **DOVER** KB ELEV: 177.60 m 6 TD: 1163.00 m TRACT: 7 WELL STATUS: OBS LOT: CONC: **IVE** LATITUDE: 42.37641

OPERATOR: LIBERTY OIL & GAS LONGITUDE: -82.33339

PERMIT: T006778


FORMATION	DEPTH (m)	TVD (m	1) TVE (m)	SOURCE
DRFTLKLV	1.50	1.50	176.05	GEOBASE
KETTLEPT	22.50	22.50	155.10	GEOBASE
HAMILTON	30.00	30.00	147.60	GEOBASE
DUNDEE	89.60	89.60	87.95	GEOBASE
LUCAS	128.00	128.00	49.55	GEOBASE
AMHERBRG	182.30	182.30	-4.75	GEOBASE
BOISBLAC	228.20	228.20	-50.65	GEOBASE
BASSISLD	255.30	255.30	-77.75	GEOBASE
GSHALE	304.80	304.80	-127.25	GEOBASE
FSHALE	311.30	311.30	-133.75	GEOBASE
ECARB	343.00	343.00	-165.45	GEOBASE
DSALT	374.10	374.10	-196.55	GEOBASE
CSHALE	385.70	385.70	-208.15	GEOBASE
BMARKER	400.60	400.60	-223.05	GEOBASE
BSALT	412.00	412.00	-234.45	GEOBASE
A2CARB	460.00	460.00	-282.45	GEOBASE
A2ANHY	490.50	490.50	-312.95	GEOBASE
A1CARB	493.60	493.60	-316.05	GEOBASE
GUELPH	502.30	502.30	-324.75	GEOBASE
GOATISL	531.00	531.00	-353.45	GEOBASE
GASPORT	578.70	578.70	-401.15	GEOBASE
ROCHESTR	588.60	588.60	-411.05	GEOBASE
REYNALES	596.00	596.00	-418.45	GEOBASE
CABTHEAD	597.70	597.70	-420.15	GEOBASE
MANITOUL	637.00	637.00	-459.45	GEOBASE
QUEENSTN	647.00	647.00	-469.45	GEOBASE
BLUEMTN	741.20	741.20	-563.65	GEOBASE
COBOURG	873.00	873.00	-695.45	GEOBASE
SHERMANFALL	911.70	911.70	-734.15	BOB COCHRANE
KIRKFLD	952.10	952.10	-774.55	GEOBASE
COBOCONK	996.00	996.00	-818.45	GEOBASE
GULLRIVR	1,029.30	1,029.30	-851.75	GEOBASE
SHADLAKE	1,140.00	1,140.00	-962.45	GEOBASE
CAMBRIAN	1,142.00	1,142.00	-964.45	GEOBASE
PRECAMB	1,145.00	1,145.00	-967.45	GEOBASE
FTD	1,163.00	1,163.00	-985.45	GEOBASE


W ellView®

Current Schematic complete

Section 3 - Schedule 6

Well Name: Rowe Ram 9



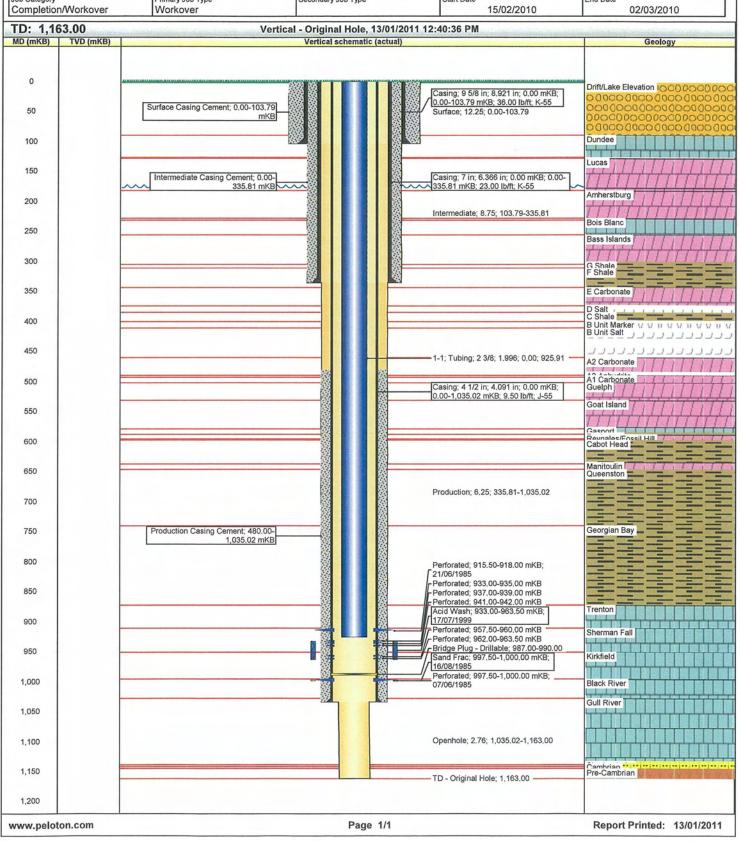

WELL ID: 7954

 WELL NAME:
 PPC 14 DOVER 1-5-IVE
 SPUD DATE:
 1987-12-19

 SHORT NAME:
 PPC14
 COMPLETED:
 1988-01-14

 SHORT NAME:
 PPC14
 COMPLETED:
 1988-01-14

 COUNTY:
 KENT
 SURFACE ELEV:
 175.00 m

 TOWNSHIP:
 DOVER
 KB ELEV:
 179.70 m

 TRACT:
 1
 TD:
 1159.20 m

LOT: 5 WELL STATUS: GPSA CONC: IVE


 OPERATOR:
 LATITUDE:
 42.37491


 PERMIT:
 T007210
 LONGITUDE:
 -82.34641

DEPTH (m) TVD (m) TVE (m) SOURCE **FORMATION** DRFTLKLV 4.70 4.70 175.00 **GEOBASE** 22.00 22.00 157.70 KETTLEPT **GEOBASE HAMILTON** 28.80 28.80 150.90 **GEOBASE** DUNDEE 88.20 88.20 91.50 **GEOBASE COLUMBUS** 129.00 129.00 50.70 **GEOBASE** 34.70 LUCAS 145.00 145.00 **GEOBASE AMHERBRG** 180.00 -0.30**GEOBASE** 180.00 **BOISBLAC** 228.00 228.00 -48.30**GEOBASE** -80.30 **BASSISLD** 260.00 260.00 **GEOBASE GSHALE** 308.30 308.30 -128.60 **GEOBASE FSHALE** 315.20 315.20 -135.50 **GEOBASE ECARB** 361.00 361.00 -181.30 **GEOBASE CSHALE** 391.90 391.90 -212.20 **GEOBASE BMARKER** 405.90 405.90 -226.20 **GEOBASE BEQUIV** 411.50 411.50 -231.80 **GEOBASE BSALT** 417.20 417.20 -237.50 **GEOBASE** A2CARB 460.50 460.50 -280.80 **GEOBASE A2SHALE** 486.30 486.30 -306.60 **GEOBASE** 493.00 -313.30 A2ANHY 493.00 **GEOBASE** A1CARB 495.70 495.70 -316.00 **GEOBASE GUELPH** 506.80 506.80 -327.10 **GEOBASE GOATISL** 532.80 532.80 -353.10 **GEOBASE GASPORT** 580.60 -400.90 **GEOBASE** 580.60 ROCHESTR 591.90 591.90 -412.20 **GEOBASE** REYNALES 599.90 599.90 -420.20 **GEOBASE** 601.10 -421.40 **GEOBASE CABTHEAD** 601.10 637.00 -457.30 **MANITOUL** 637.00 **GEOBASE** 651.10 -471.40 **GEOBASE OUEENSTN** 651.10 745.20 -565.50 **GEOBASE BLUEMTN** 745.20 **COBOURG** 877.80 877.80 -698.10 **GEOBASE SHERMANFALL** 914.50 914.50 -734.80 **GEOBASE** KIRKFLD 955.50 955.50 -775.80 **GEOBASE** COBOCONK 999.80 999.80 -820.10 **GEOBASE** 1,032.60 -852.90 **GULLRIVR** 1,032.60 **GEOBASE** 1,139.50 -959.80 **GEOBASE** SHADLAKE 1,139.50 **CAMBRIAN** 1,142.00 -962.30 **GEOBASE** 1,142.00 **PRECAMB** 1,144.30 -964.60 **GEOBASE** 1,144.30 **FTD** 1,159.20 1,159.20 -979.50 **GEOBASE**

W ellView *

Well Name: PPC 14 Dover 1 - 5 - IVE



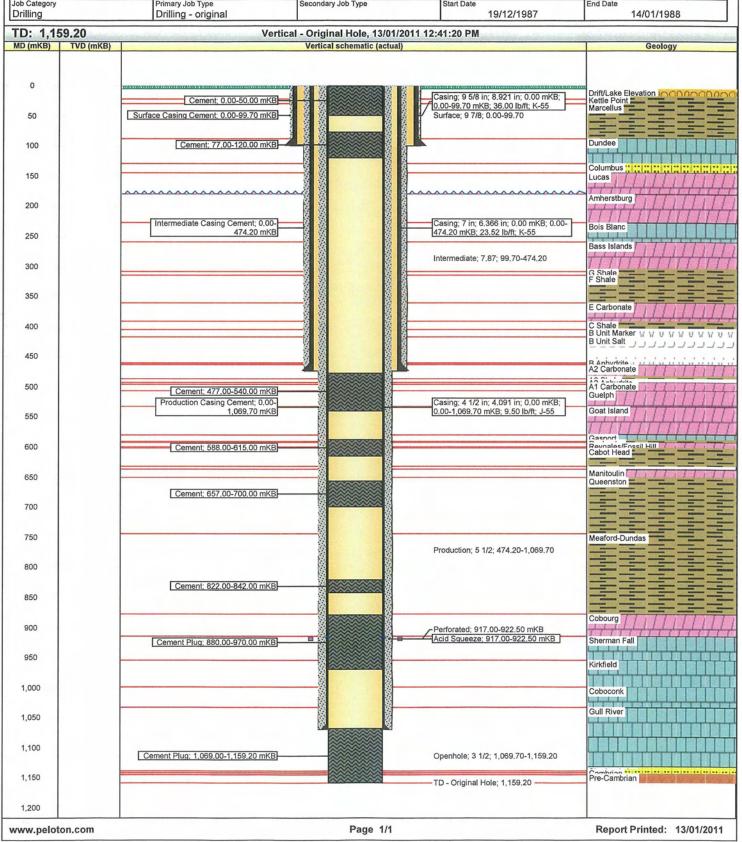

WELL ID: 8351

WELL NAME: PPC RAM 34 SPUD DATE: 1991-08-01 SHORT NAME: PPCR34 COMPLETED: 1991-08-12 COUNTY: **KENT** SURFACE ELEV: 174.80 m TOWNSHIP: **DOVER** KB ELEV: 178.30 m TRACT: 8 TD: 1078.00 m LOT: 4 WELL STATUS: **GPOS**

CONC: VE

OPERATOR: LIBERTY OIL AND GAS LATITUDE: 42.37413
PERMIT: T007811 LONGITUDE: -82.35553


FORMATION	DEPTH (m)	TVD (m	1) TVE (m)	SOURCE
DRFTLKLV	3.50	3.50	174.80	GEOBASE
DUNDEE	84.30	84.30	94.00	GEOBASE
LUCAS	116.70	116.70	61.60	GEOBASE
AMHERBRG	178.00	178.00	0.30	GEOBASE
BOISBLAC	218.50	218.50	-40.20	GEOBASE
BASSISLD	269.70	269.70	-91.40	GEOBASE
GSHALE	306.30	306.30	-128.00	GEOBASE
FSHALE	313.60	313.60	-135.30	GEOBASE
ECARB	341.80	341.80	-163.50	GEOBASE
DSALT	382.60	382.60	-204.30	GEOBASE
CSHALE	390.00	390.00	-211.70	GEOBASE
BMARKER	404.00	404.00	-225.70	GEOBASE
BSALT	416.30	416.30	-238.00	GEOBASE
BANHY	454.30	454.30	-276.00	GEOBASE
A2CARB	459.40	459.40	-281.10	GEOBASE
A2ANHY	486.30	486.30	-308.00	GEOBASE
A1CARB	489.20	489.20	-310.90	GEOBASE
GUELPH	500.40	500.40	-322.10	GEOBASE
GOATISL	527.00	527.00	-348.70	GEOBASE
GASPORT	570.00	570.00	-391.70	GEOBASE
ROCHESTR	584.00	584.00	-405.70	GEOBASE
REYNALES	591.20	591.20	-412.90	GEOBASE
CABTHEAD	593.80	593.80	-415.50	GEOBASE
MANITOUL	628.70	628.70	-450.40	GEOBASE
QUEENSTN	643.00	643.00	-464.70	GEOBASE
BLUEMTN	737.30	737.30	-559.00	GEOBASE
COBOURG	874.30	874.30	-696.00	GEOBASE
SHERMANFALL	906.80	906.80	-728.50	GEOBASE
KIRKFLD	944.80	944.80	-766.50	GEOBASE
COBOCONK	987.40	987.40	-809.10	GEOBASE
GULLRIVR	1,022.70	1,022.70	-844.40	GEOBASE
FTD	1,078.00	1,078.00	-899.70	GEOBASE

Current Schematic complete

Section 3 - Schedule 6

Well Name: PPC Ram 34

UWI 8351	Surface Legal Location	License # T007811	Pool Dover		State/Province Ontario
	LIGO Florestino (m)			IVD Cooley Floors Distance (m)	
Well Configuration Type	KB Elevation (m)	KB-Ground Distance (m)		KB-Casing Flange Distance (m)	KB-Tubing Head Distance (m)
Vertical		178.30	3.50		
Most Recent Job					
Job Category	Primary Job Type	Secondary Job Type		Start Date	End Date
Completion/Workover	Workover			02/04/2010	04/04/2010

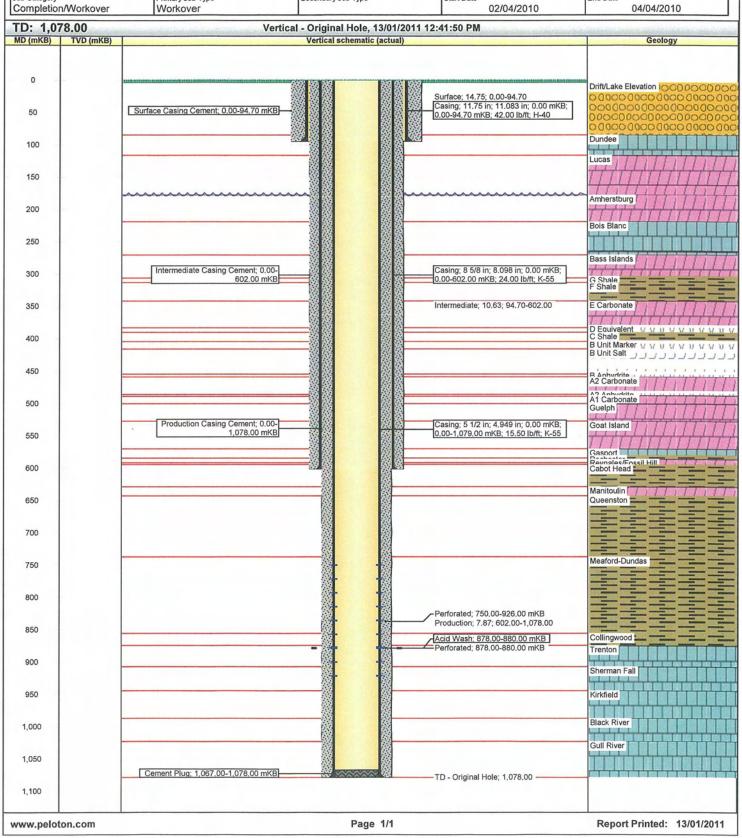

1992-02-24

1992-05-29

174.90 m

178.10 m

GPOSSA

1091.00 m

SPUD DATE:

KB ELEV:

TD:

COMPLETED:

SURFACE ELEV:

WELL STATUS:

WELL TICKET

WELL ID: 9057
WELL NAME: PPC RAM 39
SHORT NAME: PPCR39
COUNTY: KENT

TOWNSHIP: DOVER
TRACT: 2
LOT: 5

CONC: IVE

 OPERATOR:
 LATITUDE:
 42.37430

 PERMIT:
 T007859
 LONGITUDE:
 -82.3512


FORMATION	DEPTH (m)	TVD (m) TVE (m)	SOURCE
DRFTLKLV	3.20	3.20	174.90	GEOBASE
KETTLEPT	23.40	23.40	154.70	GEOBASE
MARCELLS	24.60	24.60	153.50	GEOBASE
DUNDEE	87.20	87.20	90.90	GEOBASE
LUCAS	123.70	123.70	54.40	GEOBASE
AMHERBRG	180.00	180.00	-1.90	GEOBASE
BOISBLAC	226.80	226.80	-48.70	GEOBASE
BASSISLD	270.20	270.20	-92.10	GEOBASE
GSHALE	308.10	308.10	-130.00	GEOBASE
FSHALE	315.00	315.00	-136.90	GEOBASE
ECARB	342.60	342.60	-164.50	GEOBASE
DSALT	383.40	383.40	-205.30	GEOBASE
CSHALE	390.10	390.10	-212.00	GEOBASE
BMARKER	403.90	403.90	-225.80	GEOBASE
BSALT	416.20	416.20	-238.10	GEOBASE
BANHY	457.60	457.60	-279.50	GEOBASE
A2CARB	459.40	459.40	-281.30	GEOBASE
A2ANHY	491.70	491.70	-313.60	GEOBASE
A1CARB	494.40	494.40	-316.30	GEOBASE
A1ANHY	504.50	504.50	-326.40	GEOBASE
GUELPH	506.40	506.40	-328.30	GEOBASE
GOATISL	529.50	529.50	-351.40	GEOBASE
GASPORT	576.60	576.60	-398.50	GEOBASE
ROCHESTR	589.30	589.30	-411.20	GEOBASE
REYNALES	597.00	597.00	-418.90	GEOBASE
CABTHEAD	598.80	598.80	-420.70	GEOBASE
MANITOUL	629.30	629.30	-451.20	GEOBASE
QUEENSTN	648.30	648.30	-470.20	GEOBASE
BLUEMTN	742.50	742.50	-564.40	GEOBASE
COBOURG	875.10	875.10	-697.00	GEOBASE
SHERMANFALL	914.00	914.00	-735.90	BOB COCHRANE
KIRKFLD	953.00	953.00	-774.90	GEOBASE
COBOCONK	995.00	995.00	-816.90	GEOBASE
GULLRIVR	1,027.50	1,027.50	-849.40	GEOBASE
FTD	1,091.00	1,091.00	-912.90	GEOBASE


EB-2011-0013\0014\015

Section 3 - Schedule 6

Well Name: PPC Ram 39

e IIV ie w



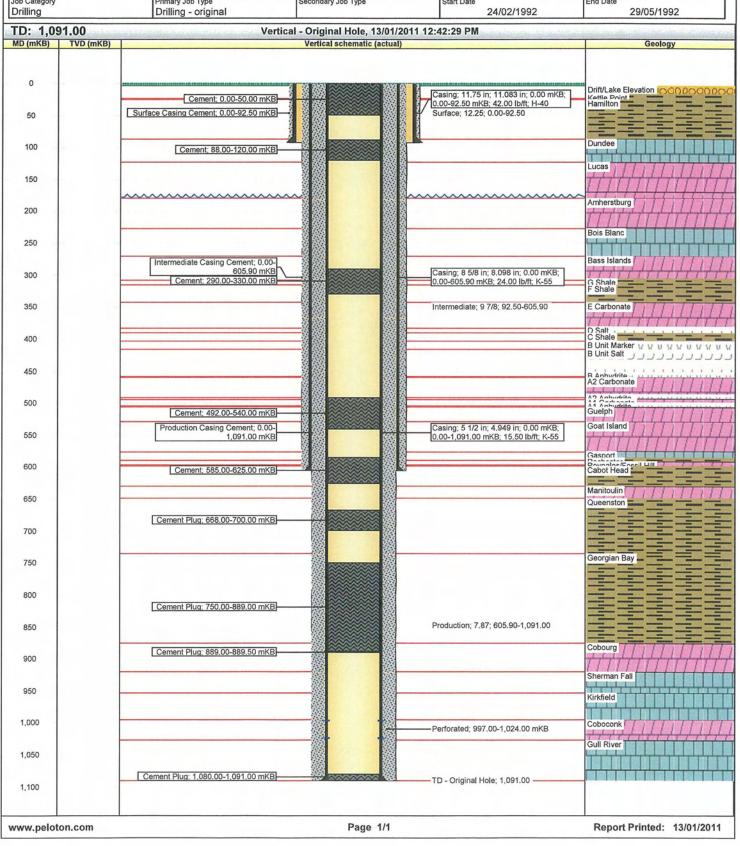

TRACT:

WELL ID: 8352
WELL NAME: PPC RAM 31
SHORT NAME: PPCR31
COUNTY: KENT
TOWNSHIP: DOVER

LOT: 6 CONC: IVE

OPERATOR: LIBERTY OIL & GAS

3

PERMIT: T007802

 SPUD DATE:
 1991-06-12

 COMPLETED:
 1991-06-21

 SURFACE ELEV:
 175.57 m

 KB ELEV:
 179.00 m

 TD:
 1070.00 m

 WELL STATUS:
 INJECTION


LATITUDE: 42.37525 LONGITUDE: -82.34266


FORMATION	DEPTH (m)	TVD (m) TVE (m)	SOURCE
DRFTLKLV	3.50	3.50	175.50	GEOBASE
KETTLEPT	20.00	20.00	159.00	GEOBASE
HAMILTON	29.60	29.60	149.40	GEOBASE
DUNDEE	89.40	89.40	89.60	GEOBASE
LUCAS	125.00	125.00	54.00	GEOBASE
AMHERBRG	157.90	157.90	21.10	GEOBASE
BOISBLAC	201.80	201.80	-22.80	GEOBASE
BASSISLD	244.20	244.20	-65.20	GEOBASE
GSHALE	312.50	312.50	-133.50	GEOBASE
FSHALE	317.80	317.80	-138.80	GEOBASE
ECARB	344.70	344.70	-165.70	GEOBASE
DSALT	382.60	382.60	-203.60	GEOBASE
CSHALE	385.50	385.50	-206.50	GEOBASE
BMARKER	403.00	403.00	-224.00	GEOBASE
BSALT	414.20	414.20	-235.20	GEOBASE
BANHY	463.30	463.30	-284.30	GEOBASE
A2CARB	465.50	465.50	-286.50	GEOBASE
A2ANHY	493.80	493.80	-314.80	GEOBASE
A1CARB	496.00	496.00	-317.00	GEOBASE
A1ANHY	523.20	523.20	-344.20	GEOBASE
GUELPH	527.00	527.00	-348.00	GEOBASE
GOATISL	533.50	533.50	-354.50	GEOBASE
GASPORT	581.60	581.60	-402.60	GEOBASE
ROCHESTR	592.00	592.00	-413.00	GEOBASE
REYNALES	600.00	600.00	-421.00	GEOBASE
CABTHEAD	601.60	601.60	-422.60	GEOBASE
MANITOUL	641.00	641.00	-462.00	GEOBASE
QUEENSTN	651.00	651.00	-472.00	GEOBASE
BLUEMTN	739.40	739.40	-560.40	GEOBASE
COBOURG	877.60	877.60	-698.60	GEOBASE
SHERMANFALL	916.20	916.20	-737.20	BOB COCHRANE
KIRKFLD	957.00	957.00	-778.00	GEOBASE
COBOCONK		1,001.70	-822.70	GEOBASE
GULLRIVR	,	1,032.90	-853.90	GEOBASE
FTD	1,070.50	1,070.50	-891.50	GEOBASE

Current Schematic complete

Section 3 - Schedule 6

Well Name: PPC Ram 31



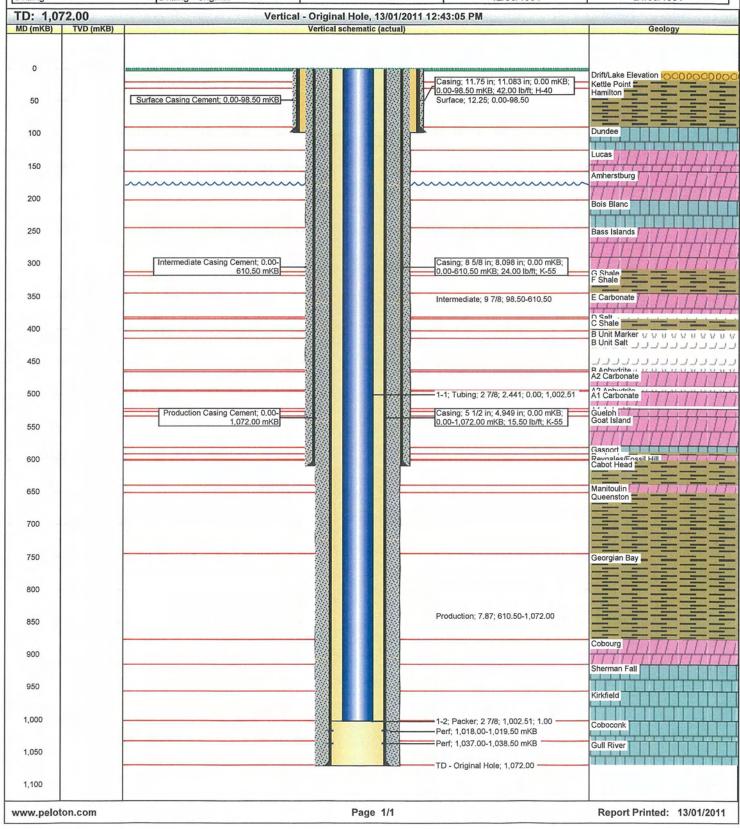

WELL ID: 4020

SPUD DATE: NA WELL NAME: **ROWE RAM 8A DOVER 4-6-IVE**

COMPLETED: 1985-01-18 SHORT NAME: RR8A SURFACE ELEV: 175.70 m **KENT** COUNTY: 177.50 m KB ELEV: TOWNSHIP: **DOVER** TD: 1136.00 m TRACT: 4

WELL STATUS: **OPGP** 6 LOT: **IVE** CONC:

LATITUDE: 42.37547 OPERATOR: LIBERTY OIL & GAS LONGITUDE: -82.33900

PERMIT: T006658A

FORMATION	DEPTH (m) TVD (m)	Т	VE (m)	SOURCE
DRFTLKLV	1.80	1.80	175.70	GEOBASE
HAMILTON	28.90	28.90	148.60	GEOBASE
DUNDEE	88.60	88.60	88.90	GEOBASE
LUCAS	125.50	125.50	52.00	GEOBASE
AMHERBRG	182.00	182.00	-4.50	GEOBASE
BOISBLAC	227.40	227.40	-49.90	GEOBASE
BASSISLD	254.10	254.10	-76.60	GEOBASE
GSHALE	303.30	303.30	-125.80	GEOBASE
FSHALE	310.30	310.30	-132.80	GEOBASE
ECARB	342.50	342.50	-165.00	GEOBASE
DSALT	383.70	383.70	-206.20	GEOBASE
CSHALE	386.70	386.70	-209.20	GEOBASE
BMARKER	401.70	401.70	-224.20	GEOBASE
BSALT	413.20	413.20	-235.70	GEOBASE
A2CARB	462.00	462.00	-284.50	GEOBASE
A2ANHY	493.00	493.00	-315.50	GEOBASE
A1CARB	496.20	496.20	-318.70	GEOBASE
GUELPH	506.10	506.10	-328.60	GEOBASE
GOATISL	531.70	531.70	-354.20	GEOBASE
GASPORT	580.30	580.30	-402.80	GEOBASE
ROCHESTR	590.70	590.70	-413.20	GEOBASE
REYNALES	598.50	598.50	-421.00	GEOBASE
CABTHEAD	600.20	600.20	-422.70	GEOBASE
MANITOUL	640.00	640.00	-462.50	GEOBASE
QUEENSTN	650.10	650.10	-472.60	GEOBASE
BLUEMTN	744.50	744.50	-567.00	GEOBASE
COBOURG	879.60	879.60	-702.10	GEOBASE
SHERMANFAL	L 918.90	918.90	-741.40	GEOBASE
KIRKFLD	959.30	959.30	-781.80	GEOBASE
COBOCONK	1,001.30	1,001.30	-823.80	GEOBASE
GULLRIVR		1,034.40	-856.90	GEOBASE
SHADLAKE		1,135.30	-957.80	GEOBASE
FTD	1,136.00	1,136.00	-958.50	GEOBASE

WELL ID: 10685 WELL NAME: VRI 5 SPUD DATE: 2003-10-21 SHORT NAME: VRI5 COMPLETED: 2003-11-03 SURFACE ELEV: COUNTY: **KENT** 175.60 m TOWNSHIP: **DOVER** KB ELEV: 179.90 m TRACT: 5 TD: 1158.80 m LOT: 6 WELL STATUS: **OPGP IVE** CONC:

OPERATOR: LIBERTY OIL & GAS LATITUDE: 42.37553
PERMIT: T010665 LONGITUDE: -82.33603

FORMATION	DEPTH (m)	TVD (m)	TVE (m)	SOURCE
DRFTLKLV	4.30	4.30	175.60	GEOBASE
KETTLEPT	25.90	25.90	154.00	GEOBASE
DUNDEE	90.60	90.60	89.30	GEOBASE
LUCAS	142.60	142.60	37.30	GEOBASE
AMHERBRG	184.60	184.60	-4.70	GEOBASE
BOISBLAC	225.20	225.20	-45.30	GEOBASE
BASSISLD	263.80	263.80	-83.90	GEOBASE
GSHALE	305.70	305.70	-125.80	GEOBASE
FSHALE	314.10	314.10	-134.20	GEOBASE
ECARB	339.00	339.00	-159.10	GEOBASE
DSALT	380.50	380.50	-200.60	GEOBASE
CSHALE	386.40	386.40	-206.50	GEOBASE
BMARKER	400.80	400.80	-220.90	GEOBASE
BSALT	411.90	411.90	-232.00	GEOBASE
A2CARB	461.70	461.70	-281.80	GEOBASE
A2SHALE	487.40	487.40	-307.50	GEOBASE
A2ANHY	494.00	494.00	-314.10	GEOBASE
A1CARB	497.40	497.40	-317.50	GEOBASE
GUELPH	506.30	506.30	-326.40	GEOBASE
GOATISL	533.00	533.00	-353.10	GEOBASE
GASPORT	583.20	583.20	-403.30	GEOBASE
ROCHESTR	593.00	593.00	-413.10	GEOBASE
REYNALES	599.70	599.70	-419.80	GEOBASE
CABTHEAD	601.40	601.40	-421.50	GEOBASE
MANITOUL	641.00	641.00	-461.10	GEOBASE
QUEENSTN	651.20	651.20	-471.30	GEOBASE
BLUEMTN	745.30	745.30	-565.40	GEOBASE
COBOURG	879.80	879.80	-699.90	GEOBASE
SHERMANFALL	918.50	918.50	-738.60	GEOBASE
KIRKFLD	958.30	958.30	-778.40	GEOBASE
COBOCONK	1,002.10	1,002.10	-822.20	GEOBASE
GULLRIVR	1,035.30	1,035.30	-855.40	GEOBASE
FTD	1,058.80	1,058.80	-878.90	GEOBASE

450

500

550

600

650

700

750

800

850

900

950

1,000

1,050

1,100

www.peloton.com

Production Casing Cement; 0.00-

1,058.80 mKB

A2 Carbonate A2 Carbonate A1 Carbonate Guelph

Georgian Bay

Collingwood Trenton

Sherman Fall

Kirkfield

Black River

Gull River

Report Printed: 13/01/2011

Casing; 5 1/2 in; 4.949 in; 0.00 mKB;

0.00-1,059,30 mKB; 15,50 lb/ft; K-55

Production; 7.87; 606.00-1,058.80

Perforated; 1,002.50-1,005.00 mKB

Perforated; 1,020.50-1,023.50 mKB

TD - Original Hole; 1,058.80

Page 1/1

1988-02-14

WELL TICKET

WELL ID: 8515

WELL NAME: PPC 15 DOVER 5-5-IVE SPUD DATE:
SHOPT NAME: PPC 15

SHORT NAME: PPC15 COMPLETED: 1988-02-23 COUNTY: **KENT** SURFACE ELEV: 176.30 m TOWNSHIP: **DOVER** KB ELEV: 180.00 m TRACT: 5 TD: 1067.00 m

LOT: 5 WELL STATUS: OPGP CONC: IVE


OPERATOR: LIBERTY OIL & GAS LATITUDE: 42.37103
PERMIT: T007240 LONGITUDE: -82.34195


<u>FORMATION</u>	DEPTH (m)		1) TVE (m)	SOURCE
DRFTLKLV	3.70	3.70	176.30	GEOBASE
KETTLEPT	22.50	22.50	157.50	GEOBASE
HAMILTON	25.50	25.50	154.50	GEOBASE
DUNDEE	89.20	89.20	90.80	GEOBASE
LUCAS	125.00	125.00	55.00	GEOBASE
AMHERBRG	170.00	170.00	10.00	GEOBASE
BOISBLAC	225.00	225.00	-45.00	GEOBASE
BASSISLD	264.50	264.50	-84.50	GEOBASE
GSHALE	308.80	308.80	-128.80	GEOBASE
FSHALE	315.40	315.40	-135.40	GEOBASE
ECARB	359.10	359.10	-179.10	GEOBASE
CSHALE	390.60	390.60	-210.60	GEOBASE
BMARKER	405.80	405.80	-225.80	GEOBASE
BEQUIV	411.20	411.20	-231.20	GEOBASE
BSALT	418.60	418.60	-238.60	GEOBASE
A2CARB	452.00	452.00	-272.00	GEOBASE
A2SHALE	485.00	485.00	-305.00	GEOBASE
A2ANHY	491.40	491.40	-311.40	GEOBASE
A1CARB	493.90	493.90	-313.90	GEOBASE
GUELPH	510.90	510.90	-330.90	GEOBASE
GOATISL	530.30	530.30	-350.30	GEOBASE
GASPORT	579.40	579.40	-399.40	GEOBASE
ROCHESTR	590.00	590.00	-410.00	GEOBASE
REYNALES	597.70	597.70	-417.70	GEOBASE
CABTHEAD	599.30	599.30	-419.30	GEOBASE
MANITOUL	634.90	634.90	-454.90	GEOBASE
QUEENSTN	648.90	648.90	-468.90	GEOBASE
BLUEMTN	741.70	741.70	-561.70	GEOBASE
COBOURG	871.80	871.80	-691.80	GEOBASE
SHERMANFALL	908.90	908.90	-728.90	GEOBASE
KIRKFLD	950.00	950.00	-770.00	GEOBASE
COBOCONK	994.00	994.00	-814.00	GEOBASE
GULLRIVR	1,025.90	1,025.90	-845.90	GEOBASE
FTD	1,067.00	1,067.00	-887.00	GEOBASE

Current Schematic complete

Section 3 - Schedule 6

Well Name: PPC 15 Dover 5-5-IVE



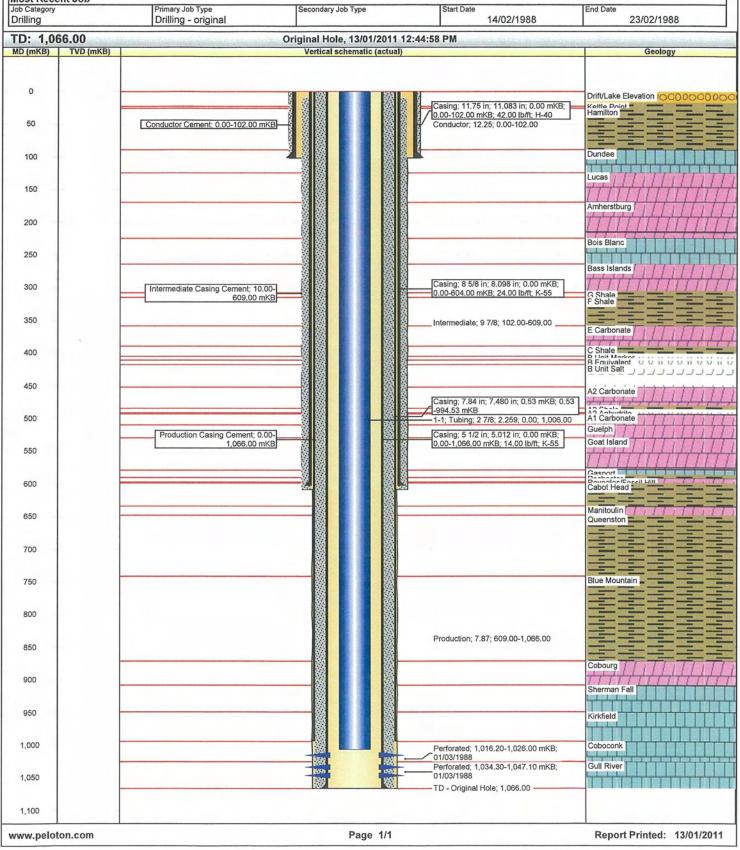

WELL ID: 4041

WELL NAME: ROWE RAM 4 DOVER 6-6-IVE SPUD DATE: 1984-02-04

SHORT NAME: RR4 COMPLETED: 1984-02-09 COUNTY: **KENT** SURFACE ELEV: 176.05 m TOWNSHIP: **DOVER** KB ELEV: 177.90 m TRACT: 6 TD: 1076.40 m

LOT: 6 WELL STATUS: OPGP CONC: IVE

OPERATOR: LIBERTY OIL & GAS LATITUDE: 42.37321 PERMIT: T006437 LONGITUDE: -82.34032

FORMATION	DEPTH (m)	TVD (n	TVE (m)	SOURCE
DRFTLKLV	1.85	1.85	176.05	GEOBASE
DUNDEE	93.00	93.00	84.90	GEOBASE
LUCAS	120.00	120.00	57.90	GEOBASE
AMHERBRG	176.80	176.80	1.10	GEOBASE
BOISBLAC	205.60	205.60	-27.70	GEOBASE
BASSISLD	263.30	263.30	-85.40	GEOBASE
GSHALE	305.20	305.20	-127.30	GEOBASE
FSHALE	311.80	311.80	-133.90	GEOBASE
ECARB	343.80	343.80	-165.90	GEOBASE
CSHALE	385.80	385.80	-207.90	GEOBASE
BMARKER	402.00	402.00	-224.10	GEOBASE
BSALT	414.00	414.00	-236.10	GEOBASE
BANHY	463.70	463.70	-285.80	GEOBASE
A2CARB	465.50	465.50	-287.60	GEOBASE
A2ANHY	492.80	492.80	-314.90	GEOBASE
A1CARB	495.60	495.60	-317.70	GEOBASE
GUELPH	506.20	506.20	-328.30	GEOBASE
GOATISL	567.00	567.00	-389.10	GEOBASE
GASPORT	581.20	581.20	-403.30	GEOBASE
ROCHESTR	591.30	591.30	-413.40	GEOBASE
REYNALES	599.00	599.00	-421.10	GEOBASE
CABTHEAD	600.70	600.70	-422.80	GEOBASE
MANITOUL	640.20	640.20	-462.30	GEOBASE
QUEENSTN	650.30	650.30	-472.40	GEOBASE
BLUEMTN	742.80	742.80	-564.90	GEOBASE
COBOURG	873.30	873.30	-695.40	GEOBASE
SHERMANFALL	912.60	912.60	-734.70	GEOBASE
KIRKFLD	954.20	954.20	-776.30	GEOBASE
COBOCONK	998.20	998.20	-820.30	GEOBASE
GULLRIVR	1,031.00	1,031.00	-853.10	GEOBASE
FTD	1,076.40	1,076.40	-898.50	GEOBASE

WELL ID: 10271

WELL NAME: CANENERCO /CNR 23 SPUD DATE: 2000-09-01
SHORT NAME: C23 COMPLETED: 2000-09-09

SHORT NAME: C23 COMPLETED: 2000-09-09 COUNTY: KENT SURFACE ELEV: 175.66 m TOWNSHIP: **DOVER** KB ELEV: 179.31 m TRACT: 4 TD: 1158.00 m

LOT: 5 WELL STATUS: OBS CONC: IVE


OPERATOR: LIBERTY OIL & GAS LATITUDE: 42.37301 PERMIT: T009591 LONGITUDE: -82.34678


FORMATION	DEPTH (m)	TVD (m) TVE (m)	SOURCE
DRFTLKLV	3.64	3.64 175.67	GEOBASE
KETTLEPT	24.20	24.20 155.11	GEOBASE
DUNDEE	87.40	87.40 91.91	GEOBASE
LUCAS	120.00	120.00 59.31	GEOBASE
AMHERBRG	180.40	180.40 -1.09	GEOBASE
BOISBLAC	226.30	226.30 -46.99	GEOBASE
BASSISLD	261.10	261.10 -81.79	GEOBASE
GSHALE	310.00	310.00 -130.69	GEOBASE
FSHALE	315.80	315.80 -136.49	GEOBASE
ECARB	344.00	344.00 -164.69	GEOBASE
CSHALE	390.50	390.50 -211.19	GEOBASE
BMARKER	406.00	406.00 -226.69	GEOBASE
BSALT	420.00	420.00 -240.69	GEOBASE
A2CARB	461.00	461.00 -281.69	GEOBASE
A2SHALE	483.90	483.90 -304.59	GEOBASE
A1CARB	492.00	492.00 -312.69	GEOBASE
GUELPH	507.60	507.60 -328.29	GEOBASE
GOATISL	547.00	547.00 -367.69	GEOBASE
GASPORT	574.20	574.20 -394.89	GEOBASE
ROCHESTR	588.80	588.80 -409.49	GEOBASE
REYNALES	596.30	596.30 -416.99	GEOBASE
CABTHEAD	598.40	598.40 -419.09	GEOBASE
MANITOUL	633.50	633.50 -454.19	GEOBASE
QUEENSTN	647.70	647.70 -468.39	GEOBASE
BLUEMTN	742.80	742.80 -563.49	GEOBASE
COBOURG	873.20	873.20 -693.89	GEOBASE
SHERMANFALL	912.00	912.00 -732.69	GEOBASE
KIRKFLD	953.10	953.10 -773.79	GEOBASE
COBOCONK	997.20	997.20 -817.89	GEOBASE
GULLRIVR	1,030.00	1,030.00 -850.69	GEOBASE
SHADLAKE	1,132.00	1,132.00 -952.69	GEOBASE
CAMBRIAN		1,135.00 -955.69	GEOBASE
PRECAMB		1,137.50 -958.19	GEOBASE
FTD	1,158.00	1,158.00 -978.69	GEOBASE

Section 3 - Schedule 6

Well Name: CanEnerco/CNR #23

UWI	Surface Legal Location	License #	Pool	State/Province
10271	Dover 4-5-IV	T009591	Dover	Ontario
Well Configuration Type Vertical	KB Elevation (m)	KB-Ground Distance (m)	KB-Casing Flange Distance (m)	KB-Tubing Head Distance (m)
Most Recent Job				
Job Category	Primary Job Type	Secondary Job Type	Start Date	End Date
Drilling	Drilling - original		01/09/2000	09/09/2000

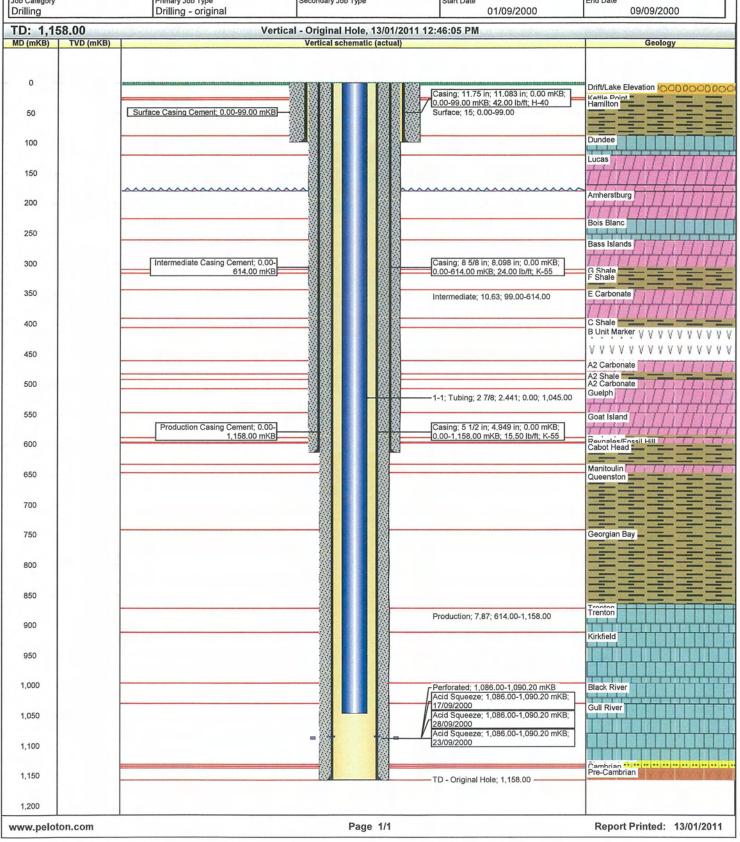

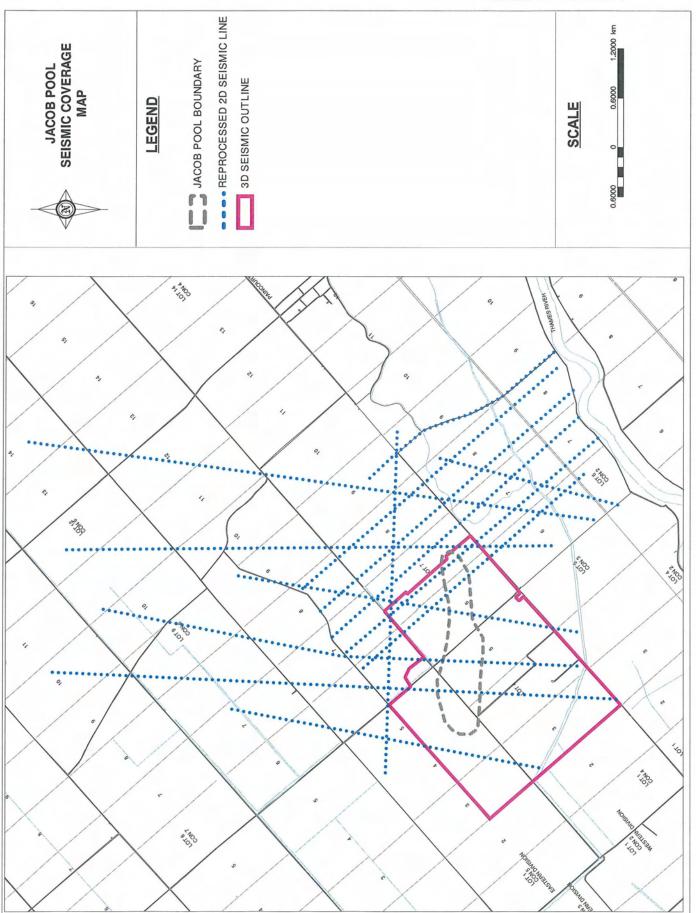

2010-07-21

WELL TICKET

WELL ID: 11927

WELL NAME: PAIN COURT 1 HORIZONTAL 1 SPUD DATE:

SHORT NAME: PC1 COMPLETED: 2010-08-31 KENT COUNTY: SURFACE ELEV: 175.40 m TOWNSHIP: **DOVER** 180.00 m KB ELEV: TRACT: TD: 1903.00 m WELL STATUS: STRAT

LOT: 6 CONC: IVE

OPERATOR: UNION GAS LIMITED LATITUDE: 42.37500 PERMIT: T012049 LONGITUDE: -82.34089

FORMATION	DEPTH (m)	TVD (m)	TVE (m)	SOURCE
DRFTLKL	4.60	4.60	175.40	UNION GAS
KETTLEPT	24.50	24.50	155.50	UNION GAS
HAMILTON	28.50	28.50	151.50	UNION GAS
DUNDEE	92.00	92.00	88.00	UNION GAS
LUCAS	127.00	127.00	53.00	UNION GAS
BOISBLAC	201.00	201.00	-21.00	UNION GAS
BASSISLD	243.00	243.00	-63.00	UNION GAS
GSHALE	307.00	307.00	-127.00	UNION GAS
FSHALE	314.00	314.00	-134.00	UNION GAS
ECARB	346.50	346.50	-166.50	UNION GAS
DSALT	377.00	377.00	-197.00	UNION GAS
CSHALE	388.50	388.50	-208.50	UNION GAS
BMARKER	405.50	405.50	-225.50	UNION GAS
BSALT	417.00	417.00	-237.00	UNION GAS
A2CARB	462.00	462.00	-282.00	UNION GAS
A2ANHY	497.50	497.50	-317.50	UNION GAS
A1CARB	498.50	498.50	-318.50	UNION GAS
A1ANHY	525.00	525.00	-345.00	UNION GAS
GUELPH	528.00	528.00	-348.00	UNION GAS
GOATISL	535.50	535.50	-355.50	UNION GAS
GASPORT	581.00	581.00	-401.00	UNION GAS
ROCHESTR	594.00	594.00	-414.00	UNION GAS
REYNALES	602.00	602.00	-422.00	UNION GAS
CABTHEAD	603.50	603.50	-423.50	UNION GAS
MANITOUL	643.50	643.49	-463.49	UNION GAS
QUEENSTN	653.50	653.47	-473.47	UNION GAS
BLUEMTN	744.50	741.72	-561.72	UNION GAS
COBOURG	922.00	878.34	-698.34	UNION GAS
SHERMANFALL	1,020.00	915.74	-735.74	UNION GAS
FTD	1,903.00	922.65	-742.65	UNION GAS


W ellView®

Current Schematic complete

Section 3 - Schedule 8

Well Name: Pain Court 1 (Horiz. #1), Dover 3 - 6 - IVE

UWI	Surface Legal Location	License #	Pool		State/Province
11927	Dover 3-6-4	12049	Jacob		Ontario
Well Configuration Type	KB Elevation (m)	KB-Ground Distance (m)	KB-Casing Fla	inge Distance (m)	KB-Tubing Head Distance (m)
Horizontal		180.00	4.60		
Most Recent Job					
Job Category	Primary Job Type	Secondary Job Type	Start Date		End Date
Drilling	Drilling - original			05/07/2010	03/09/2010

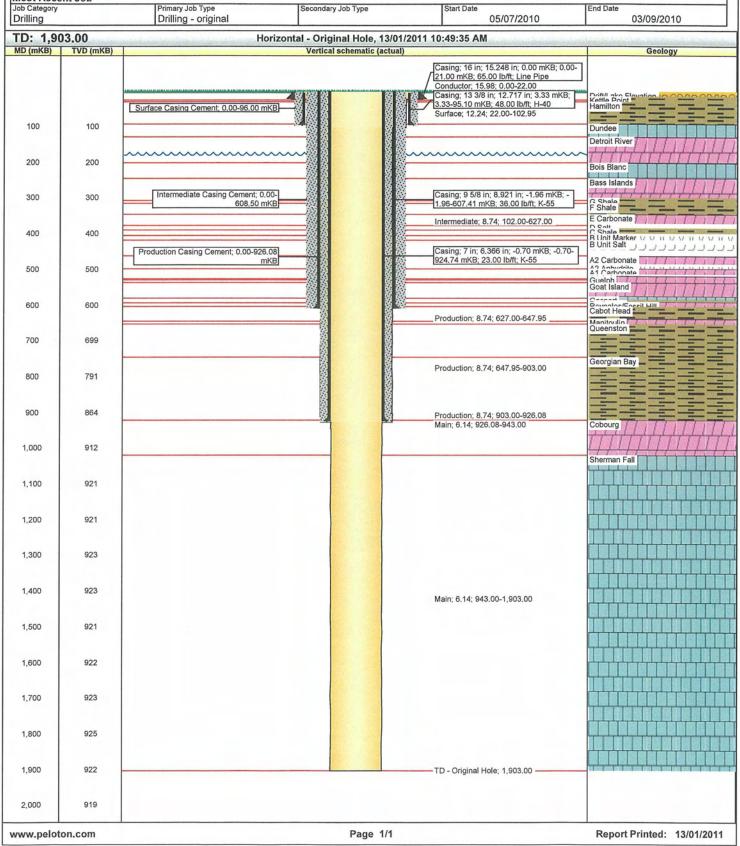

Threshold Pressure Determination By Mercury Injection Report

PAIN COURT 1 (HORIZ #1) DOVER 3-6-4



Prepared for:

UNION GAS LTD.

P.O Box 2001 Chatham, Ontario, Canada N7M 5M1



Prepared by: AGAT Laboratories Ltd.

3700 – 21st Street NE Calgary, Alberta T2E 6V6 Phone: 403.299.2000 Fax: 403.299.2184

> W/O: 10RE2695 OCTOBER 2010

October 2010 W/O: 10RE2695

TABLE OF CONTENTS

LIST OF TABLES	3
LIST OF FIGURES	3
EXECUTIVE SUMMARY	4
STUDY OBJECTIVE	5
SCOPE OF WORK	6
EXPERIMENTAL PROCEDURE Mercury Injection Capillary Pressure Test	
RESULTS	
CONCLUSIONS	13
TABLES AND FIGURES	1.4

ection 3 - Schedule 9 October 2010 W/O: 10RE2695

LIST OF TABLES

TABLE A: SUMMARY OF MERCURY INJECTION RESULTS	12
TABLE 1: MERCURY INJECTION CAPILLARY PRESSURE DATA - SP-1	15
TABLE 2: MERCURY INJECTION CAPILLARY PRESSURE DATA - SP-2	22
TABLE 3: MERCURY INJECTION CAPILLARY PRESSURE DATA - SP-3	29
LIST OF FIGURES	
FIGURE 1A: HG/AIR CAPILLARY PRESSURE VS. WETTING PHASE SATURATION – SP-1	17
FIGURE 1B: DERIVED AIR/WATER CAPILLARY PRESSURE VS. WETTING PHASE SATURATION -	- SP-1 18
FIGURE 1C: PORE DISTRIBUTION – SP-1	19
FIGURE 1D: PORE DISTRIBUTION HISTOGRAM - SP-1	20
FIGURE 1E: HEIGHT ABOVE FREE WATER - EQUIVALENT GAS/BRINE SYSTEM - SP-1	21
FIGURE 2A: HG/AIR CAPILLARY PRESSURE VS. WETTING PHASE SATURATION – SP-2	24
FIGURE 2B: DERIVED AIR/WATER CAPILLARY PRESSURE VS. WETTING PHASE SATURATION -	- SP-225
FIGURE 2C: PORE DISTRIBUTION - SP-2	26
FIGURE 2D: PORE DISTRIBUTION HISTOGRAM – SP-2	27
FIGURE 2E: HEIGHT ABOVE FREE WATER - EQUIVALENT GAS/BRINE SYSTEM SP-2	28
FIGURE 3A: HG/AIR CAPILLARY PRESSURE VS. WETTING PHASE SATURATION SP-3	31
FIGURE 3B: DERIVED AIR/WATER CAPILLARY PRESSURE VS. WETTING PHASE SATURATION -	- SP-3 32
FIGURE 3C: PORE DISTRIBUTION – SP-3	33
FIGURE 3D: PORE DISTRIBUTION HISTOGRAM – SP-3	34

FIGURE 3E: HEIGHT ABOVE FREE WATER - EQUIVALENT GAS/BRINE SYSTEM - SP-335

EXECUTIVE SUMMARY

Mercury injection capillary pressure tests were carried out on three (3) end piece samples from the PAIN COURT 1 (HORIZ #1) DOVER 3-6-4 well.

The mercury porosity results of the tested samples were measured from 3.03% to 3.29%. The three (3) samples had grain densities ranging from 2672 kg/m³ and 2697 kg/m³.

The threshold pressure, the pressure at which mercury forms a connected pathway across the sample, ranged from 439.47 kPa to 1542.76 kPa.

Mercury injection capillary pressure test results indicate that all the samples from the selected interval of the formations in the reservoir displayed a unimodal pore throat distribution with majority content of microporosity.

The majority of pore throat sizes were of micropores for the three (3) samples tested. Microporosity ranged from 60.18% to 70.08%, mezoporosity ranged from 11.09% to 23.65%, and macroporosity ranged from 14.81% to 18.84% for all three (3) samples.

Porosity values of the cores from the specified depth interval of the well indicated that the formation seems to have a limited storage capacity with restricted transport properties.

By reviewing the laboratory outcome integrated with seismic to micro structural data, it will further provide a robust basis for interpretation of the reservoir potential, sealing capacity, and stability/strength of individual strata.

STUDY OBJECTIVE

Mercury Injection Porosimetry is an experimental technique, which is used to estimate porosity, threshold pressure, pore size distributions and capillary pressures in porous materials. The method consists of injecting mercury at increasing pressure into a sample, which has been previously evacuated; this process is known as primary drainage (the "wetting" phase is the vacuum). Recording mercury pressures and saturations allows generation of a capillary pressure-saturation curve. By next lowering the pressure in stages, an imbibition process can be simulated and the equivalent capillary pressure can be generated. A second series of pressure increases will simulate a secondary or re-drainage process; again a capillary pressure curve can be plotted. The end saturation for the primary drainage process gives an estimation of the primary drainage and the imbibition processes gives an indication of the recovery efficiency for the hydrocarbon in a reservoir (again assuming the reservoir to be water wet).

Mercury Injection Porosimetry data are used to determine pore size distributions of core samples. By using suitable scaling parameters, oil/brine capillary pressure curves may also be deducted from mercury injection capillary pressure curves. AGAT can measure mercury injection capillary pressure curves and infer pore size distribution data.

The objective of the project is to study the formation characteristics of core samples collected from the well.

SCOPE OF WORK

For the purpose of evaluation of the formation, the following job was included in this project.

 Mercury injection porosity tests on end piece samples from the well to evaluate the threshold pressure, pore geometry, and capillary pressure.

EXPERIMENTAL PROCEDURE

Mercury Injection Capillary Pressure Test

End piece core samples from the well are selected for mercury injection capillary pressure testing. The clean end piece samples are individually placed in a penetrometer assembly and weighed together. The penetrometer containing the sample is loaded into the low-pressure chamber of Micromeritics Autopore porosimeter. The penetrometer is evacuated to a pressure of less than 50 micron of mercury and then filled with mercury at a pressure of 10 kPa gauge (1.5 psi gauge). Using nitrogen gas as the displacing medium, mercury is injected into the sample at incremental pressures from 10 kPa gauge (1.5 psi gauge) to 207 kPa gauge (30 psi gauge). At each pressure increment, mercury intrusion is monitored while the pressure is held constant. The pressure and the total volume for each point are recorded. Upon completion of the 30 psi gauge injection increment, the low-pressure stage is completed and the injection pressure is reduced to atmospheric. The penetrometer is removed and weighed with the sample and mercury in place (the assembly weight).

The sample is loaded into the high-pressure chamber of Autopore system and the system pressure is increased to 207 kPa gauge. Mercury is then injected into the sample at incremental pressures from 207 kPa gauge to 414 MPa gauge using hydraulic oil as the displacing medium. At each pressure increment, mercury intrusion is monitored while the pressure is held constant. The pressure and the total volume of for each point are recorded. At 414 MPa gauge the mercury is assumed to have invaded 100% of the pore space; therefore, the maximum intrusion volume at this pressure is assumed to be equal to the pore volume of the sample.

The porosity is the ratio of mercury pore volume to bulk volume and is calculated based on injected intrusion volume and sample bulk volume. The mercury pore volume is reported as a cumulative volume of mercury injected into the sample void space at the maximum injection pressure. During the mercury intrusion procedure the volume of the whole sample is determined (bulk volume). The bulk density is calculated from the sample weight and volume of the bulk. A correction to the bulk volume is required in terms of the conformance volume of the sample. The volume of mercury recorded at the selected entry pressure is the conformance volume.

R

$$d_b = \frac{W_{spl}}{V_{pen} - \frac{W_{as} - W_{pen} - W_{spl}}{D_{hg}} + C_{vol}}$$

Where,

d_b Bulk density (g/cc)
 W_{spl} Sample weight (g)
 W_{as} Assembly weight (g)
 W_{pen} Penetrometer weight (g)
 V_{pen} Penetrometer volume (cc)
 D_{hg} Mercury density (g/cc)
 C_{vol} Conformance volume (cc)

Porosity (%) = { Mercury Pore Volume (cc) / Bulk Volume (g/cc) } * 100

The non-wetting phase saturation (H_g) corresponding to each pressure step is defined as the volume of the non-wetting phase (mercury) divided by the total pore volume:

$$S_v = \frac{V_{Hg}}{PV}$$

Where,

 S_v Mercury saturation (%)

 V_{Ha} Volume of mercury injected (cc)

PV Total pore volume (cc)

The pressure steps are then plotted versus their corresponding saturation to achieve the drainage capillary pressure curve.

For each capillary pressure increment, the corresponding pore throat entry radius can be calculated via the following equation:

$$r = \frac{2\sigma \cos \theta}{P_c}$$

Where,

 σ Interfacial tension (480 dynes/cm for a mercury/vacuum system)

 θ The contact angle (140° for a mercury/vacuum system)

 P_c Capillary pressure (kPa gauge)

From the corresponding wetting phase saturation, the percentage of the pore space controlled by a given pore throat radius can be determined. This data is presented as the Cumulative Intrusion Volume.

9

The "Normalized Incremental Intrusion Volume" is calculated by dividing the mercury volume injected at each pressure increment by the maximum incremental intrusion volume.

The mercury capillary pressure curve may be converted to an air-water capillary pressure curve by the application of the pore throat radii equation. That is, with r constant at a given saturation, the ratio of the capillary pressures for the different fluids would yield:

$$\frac{(P_c)_1}{(P_c)_2} = \frac{\sigma_1 \cos \theta_1}{\sigma_2 \cos \theta_2}$$

Where, the subscripts denote type of fluids.

Assuming a mercury-vacuum system (where σ_1 = 480 dynes/cm and θ_1 = 140°) and an air-water system (where σ_2 = 72 dynes/cm and θ_2 = 0°), the above relation yields a ratio of (-5.1) {this is an industry standard based on the contact angle and interfacial tension for mercury and brine}. It is recommended that this ratio be used with caution since it has been shown (by Brown¹) that the ratio varies from formation to formation and even from sample to sample. The air-brine equivalent capillary pressure curve was generated by dividing the mercury pressure by this ratio (-5.1) and by plotting against the wetting phase saturation.

The air-brine capillary pressure in height above free water is determined using the following formula:

$$h = \frac{P_c}{(\rho_w - \rho_g)g}$$

Where.

h Height above free water level (m)

 P_c Capillary pressure (Pa)

 $\rho_{\text{\tiny M}}$ Formation water density (kg/m³)

 ρ_{g} Gas density (N₂) (kg/m³)

g Gravitational acceleration (9.81 m/s²)

^{1.} Brown, H. W., "Capillary Pressure Investigations", AIME Petroleum Transactions, Vol. 192, pp. 67-74, 1951.

10

The threshold pressure of each sample is determined based on the correlation formula by Thomas et al. 1968.

$$P_{thres} = 50.814 \left(\frac{1}{WinlandPerm}\right)^{0.43}$$

Where,

Pthres

Threshold Pressure (kPa)

Winland Perm

Winland Permeability (mD)

An estimate of the gas permeability of the samples is derived from the pore throat size distribution data through the use of the "Winland R_{35} " formula. This proprietary equation is based on the pore throat radius associated with the 35% intrusion volume (R_{35}) and the porosity derived from the mercury injection tests.

$$Log R_{35} = 0.732 + 0.588 Log K_{air} - 0.864 Log \phi_{core}$$

Where,

 R_{35} = pore aperture radius corresponding to the 35^{th} percentile of mercury

saturation in a mercury porosimetry test

K_{air} = uncorrected air permeability (mD)

porosity (%)

11

RESULTS

Mercury injection tests on three (3) samples from the PAIN COURT 1 (HORIZ #1) DOVER 3-6-4 well determined pore throat size distribution, mercury porosity, grain density, threshold pressure, and peak and median pore radii.

Mercury porosity had a range of 3.03% to 3.29% for the three (3) samples. Grain densities ranged from 2672 Kg/cm³ to 2697 Kg/cm³ for the samples.

The threshold pressure, the pressure at which mercury forms a connected pathway across the sample for the specific depth interval, ranged from 439.47 kPa to 1542.76 kPa for all three (3) samples.

The majority of pore throat sizes were of micropores for the three (3) samples tested. Microporosity ranged from 60.18% to 70.08%, mezoporosity ranged from 11.09% to 23.65%, and macroporosity ranged from 14.81% to 18.84% for all three (3) samples.

Peak pore throat radius was found to range from $0.0015~\mu m$ to $0.0025~\mu m$. Median pore throat radius was found to range from $0.0055~\mu m$ to $0.0088~\mu m$.

Table A shows the summary of mercury injection results. Laboratory data and graphs for individual samples are found in *Tables and Figures*.

Section 3 - Schedule 9 October 2010 W/O: 10RE2695

12

Table A: Summary of Mercury Injection Results

Sample ID	LSD:	Measured Depth (m)	True Vertical Depth (m)	Grain Density (K ₉ /cm ³)	Hg Porosity (%)	Winland Permeability (mD)	Threshold Pressure (kPa)	Peak Radius (µm)	Median Radius (µm)	Micropores (<1 μm) (%)	Macropores (>3 μm) (%)	Mezopores (1-3 μm) (%)
SP-1	DOVER 3-6-4	903.64	865.29	2689	3.03	0.0004	1542.76	0.0015	0.0055	69.83	14.81	15.36
SP-2	DOVER 3-6-4	906.41	867.31	2672	3.29	0.0066	439.47	0.0025	0.0088	70.08	18.84	11.09
SP-3	DOVER 3-6-4	910.20	870.09	2697	3.28	0.0013	872.76	0.0015	0.0062	60.18	16.16	23.65

Minimum	2672	3.03	0.0004	439.47	0.0015	0.0055	60.18	14.81	11.09
Average	2686	3.20	0.0028	951.66	0.0018	0.0068	66.70	16.60	16.70
Maximum	2697	3.29	0.0066	1542.76	0.0025	0.0088	70.08	18.84	23.65

EB-2011-0013\0014\0015

Section 3 - Schedule 9

October 2010

W/O: 10RE2695 13

Union Gas Ltd. PAIN COURT 1 (HORIZ #1), DOVER 3-6-4 Threshold Pressure by Mercury Injection Report

CONCLUSIONS

Mercury injection capillary pressure test results indicate that all the samples from the selected

interval of the formations in the reservoir displayed a unimodal pore throat distribution with higher

content of microporosity.

Porosity values of the cores from the specified depth interval of the well indicated that the

formation seems to have a limited storage capacity with restricted transport properties.

The threshold pressure is a key parameter to design geological storage and avoid an upward

migration of the injected fluid into the overlaying formations. The requirement for hydrocarbon

seal rocks is that minimum displacement pressure of the lithologic unit comprising the sealing

surface be greater than the buoyancy pressure of the hydrocarbon column in the accumulation.

The pore aperture size is influenced by sample size and surface irregularities of the rock relative

to pore geometry, which create a boundary condition. The pore circumference is not proportional

to the pore radius. In a sense, further cut-off determination (Net pay permeability cut-off and

porosity cut-off) is subjected to consider with specific rock type correlations.

Another type of method such as image analysis method, small angle X-ray scattering method or

SEM method may be useful to identify the characteristics of pore structure.

The outcome of mercury injection test provides non-wetting phase directional injection, pore

network characterization, free water level determination, calculation of reservoir efficiency,

calculation of hydrocarbon column heights and the integration with scanning electron microscope

sample analysis.

Comments and conclusions made herewith are based on the micro scale lab tests on the

selected core plug samples from the specific depth interval of pertinent well and one should be

aware that several well performance, well logging data, and further observation on vital

characteristics such as reservoir heterogeneity, lithology differences, ejection efficiencies, and the

existence of variations in the pore system shall be convinced to have a better conclusion of the

reservoir and recovery technique. As a result, macro scale field scenario may override the micro

scale results.

AGAT Laboratories · www.agatlabs.com

13

Union Gas Ltd.
PAIN COURT 1 (HORIZ #1), DOVER 3-6-4
Threshold Pressure by Mercury Injection Report

on 3 - Schedule 9 October 2010 W/O: 10RE2695

TABLES AND FIGURES

Table 1: Mercury Injection Capillary Pressure Data - SP-1

 Sample:
 SP-1
 Hg Porosity:
 3.03%

 Depth:
 865.29
 (m)
 Winland Permeability
 0.0004mD

A:=/	Dave	Compulation	In every entel	Managliand	Manage	Fautivalent	Matting	l laight	In annual and all
Air/Hg	Pore	Cumulative	Incremental	Normalised	Mercury	Equivalent	Wetting	Height	Incremental
Capilary	Radius	Hg Intrusion	Intrusion	Intrusion	Saturation	A/B	Phase	Above	Mercury
Pressure		Volume	Volume	Volume		Pressure	Saturation	Free Water	Saturation
(kPa)	(µm)	(ml/g)	(ml/g)		(%)	(kPa)	(%)	(m)	
10.4	59.812	0.000	0.0000	0.00	0.01	2.0	100.0	2.3	0.014
12.5	49.960	0.000	0.0001	0.05	0.56	2.4	99.4	2.8	0.544
14.8	42.184	0.000	0.0001	0.04	0.99	2.9	99.0	3.3	0.435
17.4	35.748	0.000	0.0001	0.05	1.54	3.4	98.5	3.9	0.544
20.5	30.364	0.000	0.0001	0.06	2.17	4.0	97.8	4.5	0.631
24.2	25.717	0.000	0.0001	0.11	3.36	4.8	96.6	5.4	1.197
28.5	21.906	0.000	0.0001	0.05	3.86	5.6	96.1	6.3	0.500
33.6	18.577	0.001	0.0001	0.06	4.52	6.6	95.5	7.4 8.8	0.653
39.8	15.654	0.001 0.001	0.0001 0.0001	0.08	5.37 6.26	7.8 9.2	94.6 93.7	10.4	0.848
46.8 55.4	13.313 11.264	0.001	0.0001	0.08 0.07	7.06	10.9	92.9	12.3	0.892 0.805
65.3	9.543	0.001	0.0001	0.07	7.87	12.8	92.9	14.5	0.805
77.2	8.075	0.001	0.0001	0.07	8.80	15.1	91.2	17.1	0.805
91.4	6.825	0.001	0.0001	0.10	9.85	17.9	90.2	20.2	1.044
107.9	5.778	0.001	0.0001	0.09	10.80	21.2	89.2	23.9	0.957
128.6	4.848	0.001	0.0001	0.11	11.96	25.2	88.0	28.5	1.153
152.1	4.100	0.002	0.0001	0.11	13.13	29.8	86.9	33.7	1.175
179.8	3.467	0.002	0.0002	0.14	14.68	35.3	85.3	39.8	1.545
189.9	3.284	0.002	0.0000	0.01	14.81	37.2	85.2	42.0	0.130
230.8	2.702	0.002	0.0000	0.02	15.04	45.3	85.0	51.1	0.237
278.6	2.238	0.002	0.0001	0.04	15.50	54.6	84.5	61.7	0.455
332.7	1.874	0.002	0.0001	0.08	16.36	65.2	83.6	73.7	0.863
396.6	1.572	0.002	0.0001	0.08	17.25	77.8	82.8	87.8	0.887
467.5	1.334	0.002	0.0001	0.09	18.27	91.7	81.7	103.5	1.021
561.2	1.111	0.002	0.0001	0.09	19.23	110.0	80.8	124.3	0.963
673.4	0.926	0.002	0.0001	0.08	20.08	132.0	79.9	149.1	0.851
794.3	0.785	0.002	0.0001	0.07	20.89	155.7	79.1	175.9	0.808
949.4	0.657	0.003	0.0001	0.08	21.73	186.2	78.3	210.2	0.838
1123.4	0.555	0.003	0.0001	0.06	22.41	220.3	77.6	248.8	0.678
1345.3	0.463	0.003	0.0001	0.06	23.11	263.8	76.9	297.9	0.702
1585.6	0.393	0.003	0.0001	0.05	23.66	310.9	76.3	351.1	0.553
1894.3	0.329	0.003	0.0001	0.06	24.36	371.4	75.6	419.5	0.698
2267.6	0.275	0.003	0.0001	0.06	24.99	444.6	75.0	502.1	0.626
2626.2	0.237	0.003	0.0001	0.05	25.52	514.9	74.5	581.5	0.539
3137.8	0.199	0.003	0.0001	0.05	26.06	615.3	73.9	694.8	0.534
3683.2	0.169	0.003	0.0001	0.05	26.65	722.2	73.4	815.6	0.589
4487.4	0.139	0.003	0.0001	0.06	27.28	879.9	72.7	993.7	0.633
5200.9	0.120	0.003	0.0000	0.04	27.71	1019.8	72.3	1151.7	0.427
6097.1	0.102	0.003	0.0001	0.05	28.22	1195.5	71.8	1350.1	0.516

Union Gas Ltd.
PAIN COURT 1 (HORIZ #1), DOVER 3-6-4
Threshold Pressure by Mercury Injection Report

October 2010 W/O: 10RE2695 16

Air/Hg	Pore	Cumulative	Incremental	Normalised	Mercury	Equivalent	Wetting	Height	Incremental
Capilary	Radius	Hg Intrusion	Intrusion	Intrusion	Saturation	A/B	Phase	Above	Mercury
Pressure		Volume	Volume	Volume		Pressure	Saturation	Free Water	Saturation
(kPa)	(µm)	(ml/g)	(ml/g)		(%)	(kPa)	(%)	(m)	
7303.5	0.085	0.003	0.0001	0.05	28.73	1432.1	71.3	1617.3	0.509
8634.8	0.072	0.003	0.0001	0.05	29.31	1693.1	70.7	1912.1	0.577
10180.5	0.061	0.003	0.0001	0.05	29.88	1996.2	70.1	2254.3	0.573
12036.5	0.052	0.004	0.0001	0.05	30.47	2360.1	69.5	2665.3	0.590
14149.0	0.044	0.004	0.0001	0.05	31.05	2774.3	69.0	3133.1	0.573
16819.6	0.037	0.004	0.0001	0.05	31.63	3298.0	68.4	3724.5	0.586
19816.8	0.031	0.004	0.0001	0.07	32.40	3885.7	67.6	4388.2	0.770
23473.8	0.027	0.004	0.0001	0.07	33.22	4602.7	66.8	5198.0	0.817
27758.5	0.022	0.004	0.0001	0.08	34.06	5442.8	65.9	6146.7	0.837
32883.0	0.019	0.004	0.0001	0.10	35.15	6447.7	64.8	7281.5	1.096
38746.4	0.016	0.004	0.0001	0.11	36.32	7597.3	63.7	8579.9	1.169
45986.7	0.014	0.004	0.0002	0.13	37.69	9017.0	62.3	10183.1	1.372
54247.3	0.011	0.005	0.0002	0.15	39.30	10636.7	60.7	12012.3	1.610
64135.3	0.010	0.005	0.0002	0.15	40.99	12575.5	59.0	14201.9	1.691
75918.0	0.008	0.005	0.0003	0.22	43.43	14885.9	56.6	16811.0	2.436
89903.9	0.007	0.005	0.0003	0.22	45.80	17628.2	54.2	19908.0	2.367
125879.0	0.005	0.006	0.0007	0.59	52.23	24682.1	47.8	27874.2	6.437
149346.1	0.004	0.007	0.0005	0.38	56.35	29283.6	43.7	33070.7	4.112
176441.7	0.004	0.007	0.0005	0.43	61.04	34596.4	39.0	39070.6	4.693
208999.9	0.003	0.008	0.0006	0.49	66.41	40980.4	33.6	46280.2	5.373
247073.8	0.003	0.008	0.0007	0.59	72.85	48445.8	27.1	54711.1	6.441
292273.7	0.002	0.009	0.0009	0.69	80.38	57308.6	19.6	64720.0	7.525
345439.6	0.002	0.010	0.0010	0.79	89.07	67733.3	10.9	76492.9	8.688
408570.2	0.002	0.012	0.0013	1.00	100.00	80111.8	0.0	90472.3	10.935

Figure 1A: Hg/Air Capillary Pressure vs. Wetting Phase Saturation - SP-1

Sample:

SP-1

Hg Porosity:

3.03 %

Depth:

865.29 (m)

Winland Permeability


0.0004 mD



Figure 1B: Derived Air/Water Capillary Pressure vs. Wetting Phase Saturation – SP-1

 Sample:
 SP-1
 Hg Porosity:
 3.03 %


 Depth:
 865.29 (m)
 Winland Permeability
 0.0004 mD

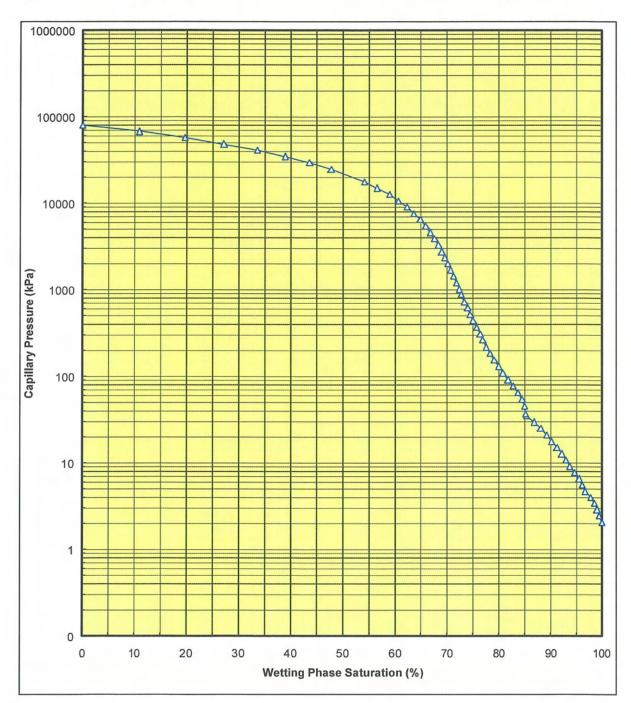

Section 3 - Schedule 9 October 2010 W/O: 10RE2695

Figure 1C: Pore Distribution - SP-1

Sample: SP-1 Hg Porosity: 3.03 % Depth: 865.29 (m) Winland Permea 0.0004 mD

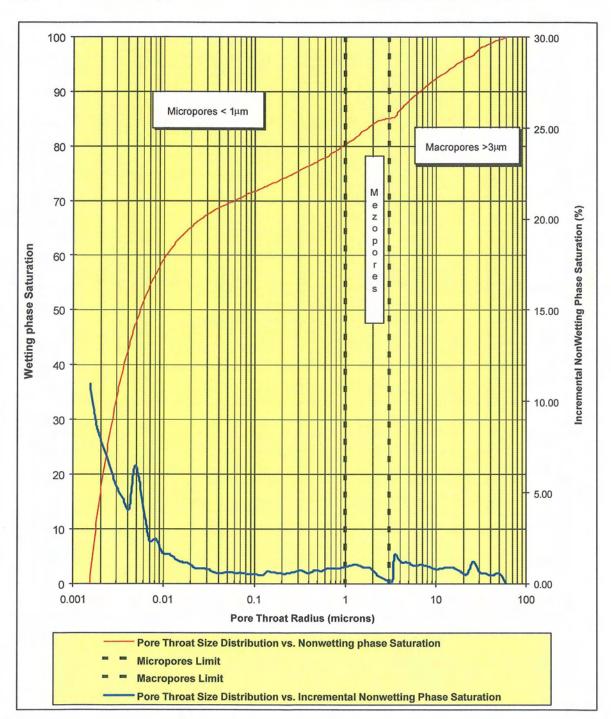


Section 3 - Schedule 9 October 2010 W/O: 10RE2695

20

Figure 1D: Pore Distribution Histogram - SP-1

 Sample:
 SP-1
 Hg Porosity:
 3.03 %

 Depth:
 865.29 (m)
 Winland Permeability
 0.0004 mD

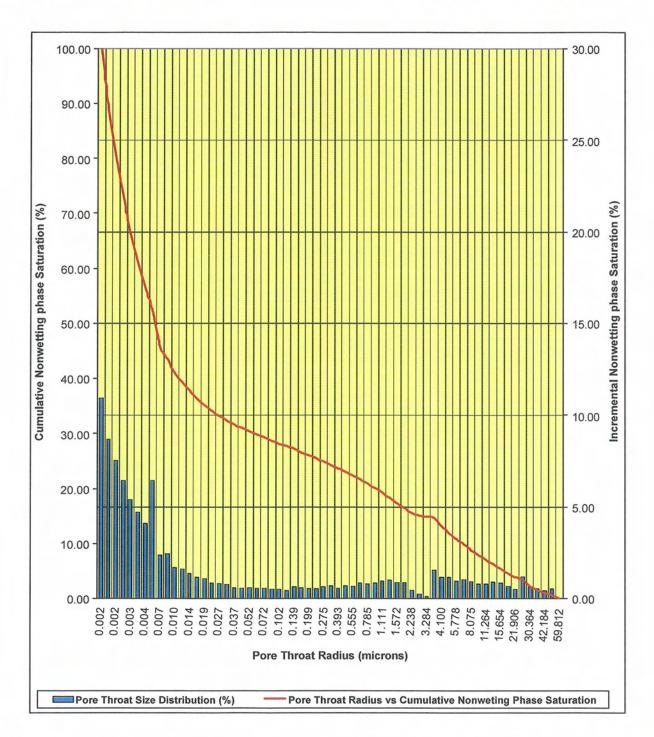


21

Figure 1E: Height Above Free Water - Equivalent Gas/Brine System - SP-1

 Sample:
 SP-1
 Hg Porosity:
 3.03 %

 Depth:
 865.29 (m)
 Winland Permeability
 0.0004 mD

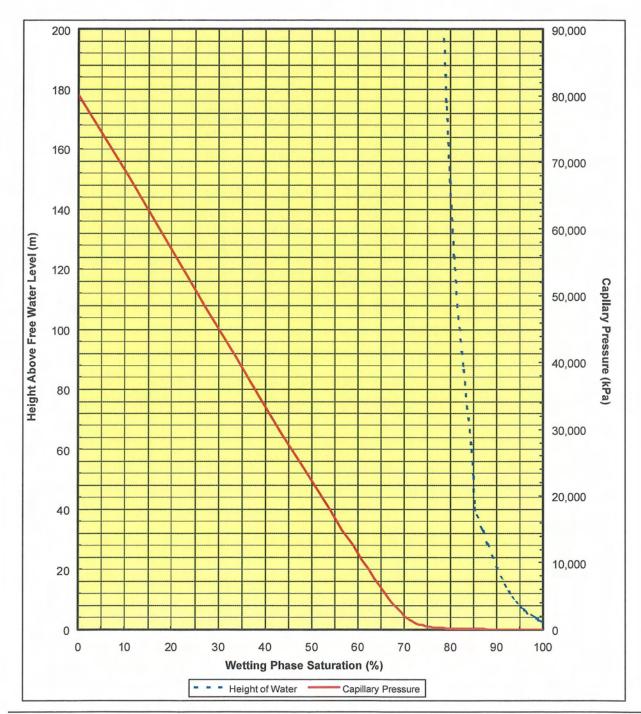

22

Table 2: Mercury Injection Capillary Pressure Data - SP-2

 Sample:
 SP-2
 Hg Porosity:
 3.29%

 Depth:
 867.31
 (m)
 Winland Permeability
 0.0066mD

Air/Hg	Pore	Cumulative	Incremental	Normalised	Mercury	Equivalent	Wetting	Height	Incremental
Capilary	Radius	Hg Intrusion	Intrusion	Intrusion	Saturation	A/B	Phase	Above	Mercury
Pressure		Volume	Volume	Volume		Pressure	Saturation	Free Water	Saturation
(kPa)	(µm)	(ml/g)	(ml/g)		(%)	(kPa)	(%)	(m)	
10.4	59.863	0.000	0.0000	0.00	0.01	2.0	100.0	2.3	0.013
12.4	50.095	0.000	0.0001	0.06	0.61	2.4	99.4	2.8	0.598
14.8	42.250	0.000	0.0001	0.05	1.17	2.9	98.8	3.3	0.559
17.4	35.791	0.000	0.0002	0.12	2.46	3.4	97.5	3.9	1.292
20.5	30.387	0.000	0.0001	0.08	3.27	4.0	96.7	4.5	0.810
24.3	25.697	0.001	0.0001	0.07	4.00	4.8	96.0	5.4	0.733
28.5	21.914	0.001	0.0001	0.08	4.89	5.6	95.1	6.3	0.887
33.6	18.572	0.001	0.0002	0.12	6.16	6.6	93.8	7.4	1.273
39.8	15.667	0.001	0.0002	0.13	7.53	7.8	92.5	8.8	1.369
46.8	13.313	0.001	0.0001	0.10	8.65	9.2	91.3	10.4	1.118
55.3	11.267	0.001	0.0001	0.09	9.58	10.9	90.4	12.3	0.926
65.3	9.545	0.001	0.0001	0.08	10.39	12.8	89.6	14.5	0.810
77.2	8.076	0.001	0.0001	0.09	11.33	15.1	88.7	17.1	0.945
91.4	6.825	0.002	0.0001	0.10	12.41	17.9	87.6	20.2	1.080
107.9	5.781	0.002	0.0001	0.11	13.57	21.1	86.4	23.9	1.157
128.9	4.836	0.002	0.0002	0.15	15.13	25.3	84.9	28.5	1.562
152.1	4.100	0.002	0.0002	0.16	16.87	29.8	83.1	33.7	1.736
179.8	3.467	0.002	0.0002	0.17	18.66	35.3	81.3	39.8	1.793
190.5	3.273	0.002	0.0000	0.02	18.84	37.4	81.2	42.2	0.175
228.3	2.731	0.002	0.0000	0.02	19.08	44.8	80.9	50.6	0.241
275.3	2.265	0.002	0.0001	0.05	19.56	54.0	80.4	61.0	0.485
339.3	1.838	0.003	0.0001	0.10	20.66	66.5	79.3	75.1	1.101
395.3	1.577	0.003	0.0001	0.10	21.69	77.5	78.3	87.5	1.029
475.4	1.312	0.003	0.0001	0.11	22.83	93.2	77.2	105.3	1.135
559.8	1.114	0.003	0.0001	0.10	23.89	109.8	76.1	124.0	1.063
673.4	0.926	0.003	0.0001	0.10	24.95	132.0	75.1	149.1	1.058
793.3	0.786	0.003	0.0001	0.08	25.81	155.5	74.2	175.7	0.866
944.8	0.660	0.003	0.0001	0.10	26.87	185.3	73.1	209.2	1.061
1131.8	0.551	0.004	0.0001	0.09	27.85	221.9	72.2	250.6	0.971
1335.0	0.467	0.004	0.0001	0.07	28.62	261.8	71.4	295.6	0.772
1585.2	0.393	0.004	0.0001	0.07	29.35	310.8	70.7	351.0	0.732
1895.3	0.329	0.004	0.0001	0.08	30.19	371.6	69.8	419.7	0.840
2263.0	0.276	0.004	0.0001	0.08	31.01	443.7	69.0	501.1	0.823
2623.1	0.238	0.004	0.0001	0.05	31.51	514.3	68.5	580.9	0.499
3134.6	0.199	0.004	0.0001	0.07	32.25	614.6	67.7	694.1	0.742
3686.3	0.169	0.004	0.0001	0.07	32.95	722.8	67.1	816.3	0.697
4491.3	0.139	0.004	0.0001	0.07	33.74	880.6	66.3	994.5	0.790
5186.6	0.120	0.004	0.0001	0.05	34.29	1017.0	65.7	1148.5	0.548
6101.7	0.102	0.004	0.0001	0.06	34.94	1196.4	65.1	1351.1	0.657

Section 3 - Schedule 9

Union Gas Ltd.
PAIN COURT 1 (HORIZ #1), DOVER 3-6-4
Threshold Pressure by Mercury Injection Report

October 2010 W/O: 10RE2695 23

Air/Hg Capilary	Pore Radius	Cumulative Hg Intrusion	Incremental Intrusion	Normalised Intrusion	Mercury Saturation	Equivalent A/B	Wetting Phase	Height Above	Incremental Mercury
Pressure		Volume	Volume	Volume		Pressure	Saturation	Free Water	Saturation
(kPa)	(µm)	(ml/g)	(ml/g)		(%)	(kPa)	(%)	(m)	
7300.5	0.085	0.005	0.0001	0.07	35.68	1431.5	64.3	1616.6	0.732
8639.8	0.072	0.005	0.0001	0.07	36.37	1694.1	63.6	1913.2	0.699
10181.8	0.061	0.005	0.0001	0.07	37.09	1996.4	62.9	2254.6	0.718
12044.5	0.052	0.005	0.0001	0.06	37.78	2361.7	62.2	2667.1	0.688
14149.3	0.044	0.005	0.0001	0.08	38.59	2774.4	61.4	3133.2	0.807
16824.1	0.037	0.005	0.0001	0.07	39.32	3298.8	60.7	3725.5	0.735
19813.4	0.031	0.005	0.0001	0.08	40.17	3885.0	59.8	4387.4	0.842
23469.9	0.027	0.005	0.0001	0.09	41.10	4601.9	58.9	5197.1	0.930
27761.7	0.022	0.005	0.0001	0.09	42.10	5443.5	57.9	6147.5	1.002
32875.6	0.019	0.005	0.0001	0.10	43.12	6446.2	56.9	7279.9	1.024
38742.5	0.016	0.006	0.0002	0.12	44.37	7596.6	55.6	8579.0	1.246
46000.6	0.014	0.006	0.0002	0.13	45.73	9019.7	54.3	10186.2	1.362
54249.4	0.011	0.006	0.0002	0.14	47.24	10637.1	52.8	12012.8	1.510
64139.2	0.010	0.006	0.0002	0.16	48.95	12576.3	51.0	14202.7	1.715
75921.9	0.008	0.006	0.0002	0.17	50.82	14886.7	49.2	16811.9	1.868
89919.2	0.007	0.007	0.0003	0.23	53.27	17631.2	46.7	19911.4	2.450
125876.1	0.005	0.008	0.0008	0.56	59.22	24681.6	40.8	27873.6	5.952
149353.7	0.004	0.008	0.0005	0.35	63.02	29285.0	37.0	33072.4	3.798
176443.3	0.004	0.009	0.0006	0.43	67.65	34596.7	32.4	39071.0	4.623
208982.8	0.003	0.009	0.0005	0.35	71.42	40977.0	28.6	46276.4	3.770
247067.1	0.003	0.010	0.0014	1.00	82.13	48444.5	17.9	54709.7	10.710
292260.3	0.002	0.011	0.0009	0.67	89.28	57305.9	10.7	64717.1	7.149
345500.6	0.002	0.012	0.0006	0.44	93.96	67745.2	6.0	76506.4	4.689
408592.1	0.002	0.013	0.0008	0.56	100.00	80116.1	0.0	90477.2	6.035

Figure 2A: Hg/Air Capillary Pressure vs. Wetting Phase Saturation - SP-2

 Sample:
 SP-2
 Hg Porosity:
 3.29 %

 Depth:
 867.31 (m)
 Winland Permeability
 0.0066 mD


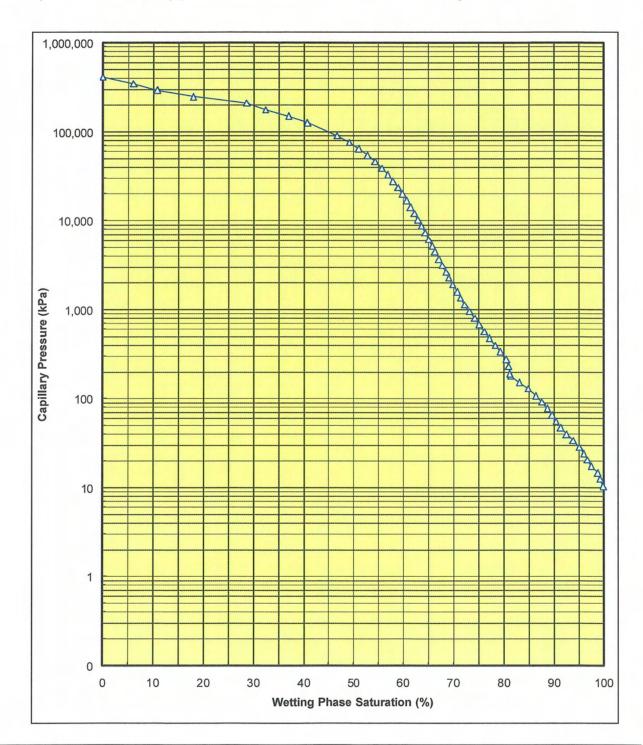


Figure 2B: Derived Air/Water Capillary Pressure vs. Wetting Phase Saturation - SP-2

 Sample:
 SP-2
 Hg Porosity:
 3.29 %

 Depth:
 867.31 (m)
 Winland Permeability
 0.0066 mD

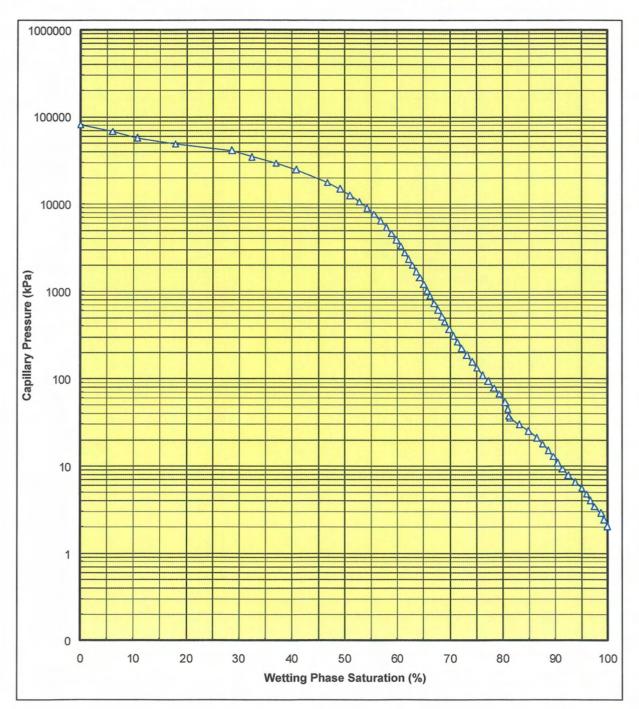


26

Figure 2C: Pore Distribution – SP-2

 Sample:
 SP-2
 Hg Porosity:
 3.29 %

 Depth:
 867.31 (m)
 Winland Permea
 0.0066 mD

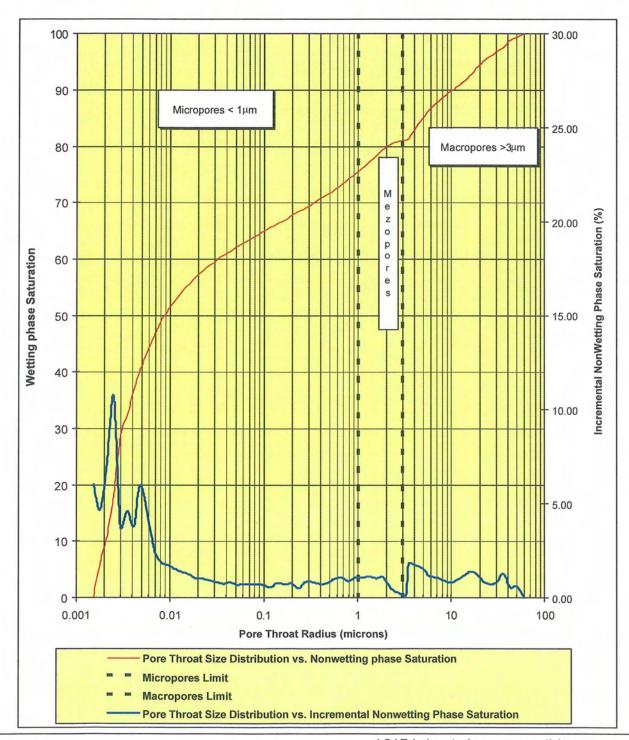

Section 3 - Schedule 9 October 2010 W/O: 10RE2695

10RE2695 27

Figure 2D: Pore Distribution Histogram - SP-2

Sample:

SP-2

Hg Porosity:

3.29 %

Depth:

867.31 (m)

Winland Permeability

0.0066 mD

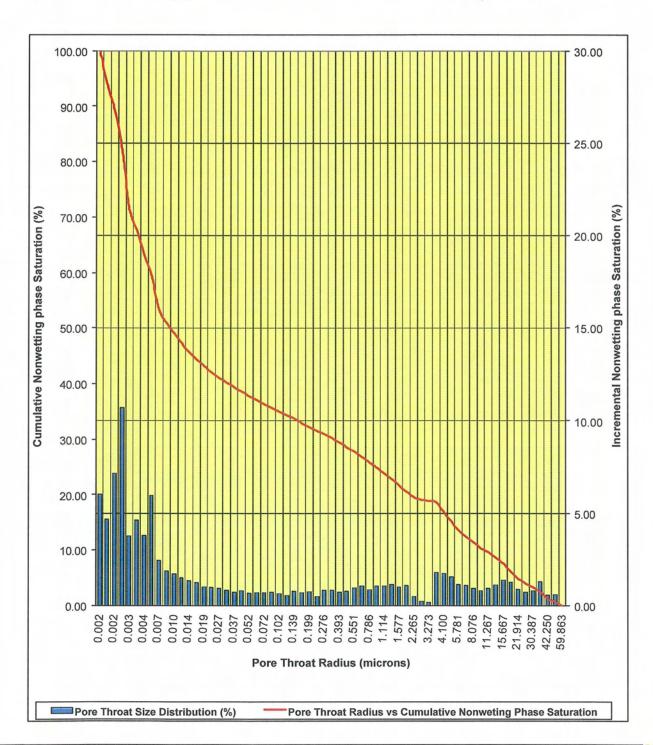


Figure 2E: Height Above Free Water - Equivalent Gas/Brine System - SP-2

 Sample:
 SP-2
 Hg Porosity:
 3.29 %

 Depth:
 867.31 (m)
 Winland Permeability
 0.0066 mD

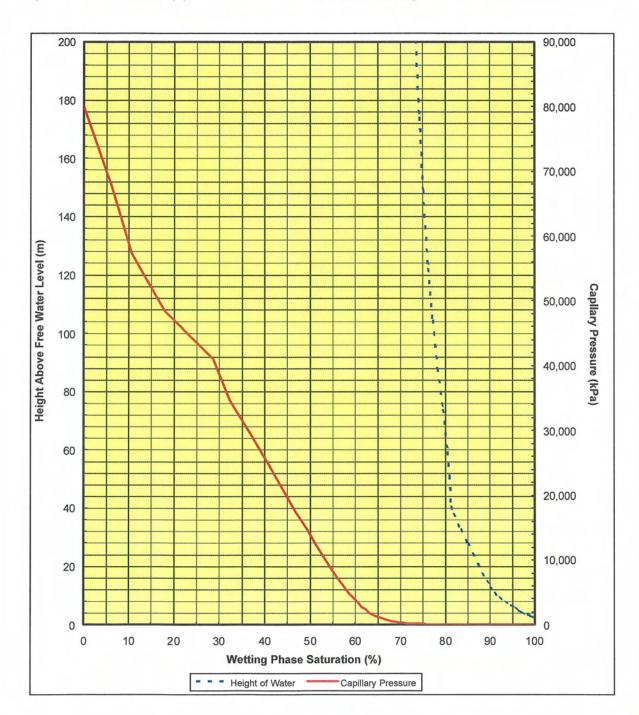


Table 3: Mercury Injection Capillary Pressure Data - SP-3

 Sample:
 SP-3
 Hg Porosity:
 3.28%

 Depth:
 870.09
 (m)
 Winland Permeability
 0.0013mD

Air/Hg Capilary	Pore Radius	Cumulative Hg Intrusion	Incremental Intrusion	Normalised Intrusion	Mercury Saturation	Equivalent A/B	Wetting Phase	Height Above	Incremental Mercury
Pressure		Volume	Volume	Volume		Pressure	Saturation	Free Water	Saturation
(kPa)	(µm)	(ml/g)	(ml/g)		(%)	(kPa)	(%)	(m)	
10.4	59.980	0.000	0.0000	0.00	0.01	2.0	100.0	2.3	0.008
10.4	60.122	0.000	0.0000	0.01	0.13	2.0	99.9	2.3	0.125
12.5	50.064	0.000	0.0001	0.05	0.66	2.4	99.3	2.8	0.531
14.7	42.352	0.000	0.0001	0.07	1.38	2.9	98.6	3.3	0.718
17.4	35.809	0.000	0.0002	0.15	2.94	3.4	97.1	3.9	1.560
20.5	30.406	0.000	0.0001	0.10	3.94	4.0	96.1	4.5	0.999
24.2	25.751	0.001	0.0001	0.07	4.66	4.7	95.3	5.4	0.718
28.4	21.933	0.001	0.0001	0.06	5.31	5.6	94.7	6.3	0.655
33.5	18.591	0.001	0.0001	0.06	5.94	6.6	94.1	7.4	0.624
39.8	15.680	0.001	0.0001	0.08	6.72	7.8	93.3	8.8	0.780
46.8	13.318	0.001	0.0001	0.10	7.72	9.2	92.3	10.4	0.999
55.3	11.272	0.001	0.0001	0.07	8.47	10.8	91.5	12.2	0.749
65.3	9.546	0.001	0.0001	0.08	9.25	12.8	90.8	14.5	0.780
77.2	8.078	0.001	0.0001	0.10	10.21	15.1	89.8	17.1	0.967
91.3	6.829	0.001	0.0001	0.09	11.15	17.9	88.9	20.2	0.936
107.9	5.781	0.002	0.0001	0.11	12.30	21.1	87.7	23.9	1.155
128.9	4.836	0.002	0.0001	0.10	13.37	25.3	86.6	28.6	1.061
152.0	4.101	0.002	0.0002	0.12	14.58	29.8	85.4	33.7	1.217
179.8	3.467	0.002	0.0002	0.12	15.83	35.3	84.2	39.8	1.248
189.1	3.298	0.002	0.0000	0.03	16.16	37.1	83.8	41.9	0.333
228.4	2.730	0.002	0.0000	0.03	16.44	44.8	83.6	50.6	0.277
276.3	2.257	0.002	0.0001	0.06	17.06	54.2	82.9	61.2	0.616
334.1	1.866	0.002	0.0001	0.07	17.73	65.5	82.3	74.0	0.672
398.0	1.566	0.002	0.0001	0.09	18.62	78.0	81.4	88.1	0.888
469.5	1.328	0.002	0.0002	0.12	19.81	92.1	80.2	104.0	1.194
565.5	1.103	0.003	0.0001	0.10	20.83	110.9	79.2	125.2	1.024
671.5	0.929	0.003	0.0001	0.09	21.72	131.7	78.3	148.7	0.888
794.3	0.785	0.003	0.0001	0.09	22.64	155.7	77.4	175.9	0.914
946.9	0.658	0.003	0.0001	0.08	23.49	185.7	76.5	209.7	0.855
1121.2	0.556	0.003	0.0001	0.09	24.40	219.8	75.6	248.3	0.905
1335.6	0.467	0.003	0.0001	0.08	25.21	261.9	74.8	295.7	0.815
1587.1	0.393	0.003	0.0001	0.08	26.02	311.2	74.0	351.4	0.809
1895.3	0.329	0.003	0.0001	0.08	26.81	371.6	73.2	419.7	0.793
2271.2	0.275	0.003	0.0001	0.08	27.61	445.3	72.4	502.9	0.797
2631.6	0.237	0.004	0.0001	0.06	28.18	516.0	71.8	582.7	0.568
3139.9	0.199	0.004	0.0001	0.06	28.82	615.7	71.2	695.3	0.639
3688.5	0.169	0.004	0.0001	0.07	29.48	723.2	70.5	816.8	0.664
4493.7	0.139	0.004	0.0001	0.08	30.24	881.1	69.8	995.1	0.759
5189.0	0.120	0.004	0.0001	0.05	30.78	1017.5	69.2	1149.0	0.539

Union Gas Ltd.
PAIN COURT 1 (HORIZ #1), DOVER 3-6-4
Threshold Pressure by Mercury Injection Report

October 2010 W/O: 10RE2695 30

Air/Hg	Pore	Cumulative	Incremental	Normalised	Mercury	Equivalent	Wetting	Height	Incremental
Capilary	Radius	Hg Intrusion	Intrusion	Intrusion	Saturation	A/B	Phase	Above	Mercury
Pressure		Volume	Volume	Volume		Pressure	Saturation	Free Water	Saturation
(kPa)	(µm)	(ml/g)	(ml/g)		(%)	(kPa)	(%)	(m)	
6097.9	0.102	0.004	0.0001	0.06	31.36	1195.7	68.6	1350.3	0.579
7296.5	0.085	0.004	0.0001	0.08	32.12	1430.7	67.9	1615.7	0.759
8645.7	0.072	0.004	0.0001	0.06	32.69	1695.2	67.3	1914.5	0.575
10181.4	0.061	0.004	0.0001	0.06	33.32	1996.4	66.7	2254.5	0.631
12045.4	0.052	0.004	0.0001	0.06	33.92	2361.9	66.1	2667.3	0.597
14150.6	0.044	0.004	0.0001	0.07	34.65	2774.6	65.3	3133.5	0.734
16816.3	0.037	0.004	0.0001	0.05	35.21	3297.3	64.8	3723.7	0.554
19800.6	0.031	0.005	0.0001	0.08	36.03	3882.5	64.0	4384.6	0.825
23468.7	0.027	0.005	0.0001	0.07	36.75	4601.7	63.2	5196.8	0.719
27761.4	0.022	0.005	0.0001	0.09	37.70	5443.4	62.3	6147.4	0.944
32881.0	0.019	0.005	0.0001	0.10	38.72	6447.3	61.3	7281.1	1.024
38737.2	0.016	0.005	0.0001	0.10	39.74	7595.5	60.3	8577.8	1.019
45997.6	0.014	0.005	0.0002	0.12	40.95	9019.1	59.1	10185.5	1.210
54233.6	0.011	0.005	0.0002	0.14	42.41	10634.0	57.6	12009.3	1.459
64132.9	0.010	0.006	0.0002	0.17	44.15	12575.1	55.9	14201.4	1.740
75938.1	0.008	0.006	0.0002	0.19	46.12	14889.8	53.9	16815.5	1.967
89891.7	0.007	0.006	0.0002	0.19	48.00	17625.8	52.0	19905.3	1.888
106331.0	0.006	0.006	0.0004	0.31	51.10	20849.2	48.9	23545.6	3.091
125883.7	0.005	0.007	0.0004	0.31	54.27	24683.1	45.7	27875.2	3.174
149354.0	0.004	0.007	0.0004	0.35	57.78	29285.1	42.2	33072.4	3.507
176452.6	0.004	0.008	0.0005	0.43	62.14	34598.5	37.9	39073.0	4.359
208993.6	0.003	0.008	0.0007	0.52	67.43	40979.1	32.6	46278.8	5.298
247066.2	0.003	0.009	0.0008	0.62	73.70	48444.3	26.3	54709.5	6.266
292267.1	0.002	0.010	0.0009	0.72	81.02	57307.3	19.0	64718.6	7.318
345240.6	0.002	0.011	0.0011	0.88	89.89	67694.2	10.1	76448.9	8.867
408583.2	0.002	0.013	0.0013	1.00	100.00	80114.4	0.0	90475.2	10.114




31

Figure 3A: Hg/Air Capillary Pressure vs. Wetting Phase Saturation - SP-3

 Sample:
 SP-3
 Hg Porosity:
 3.28 %

 Depth:
 870.09 (m)
 Winland Permeability
 0.0013 mD

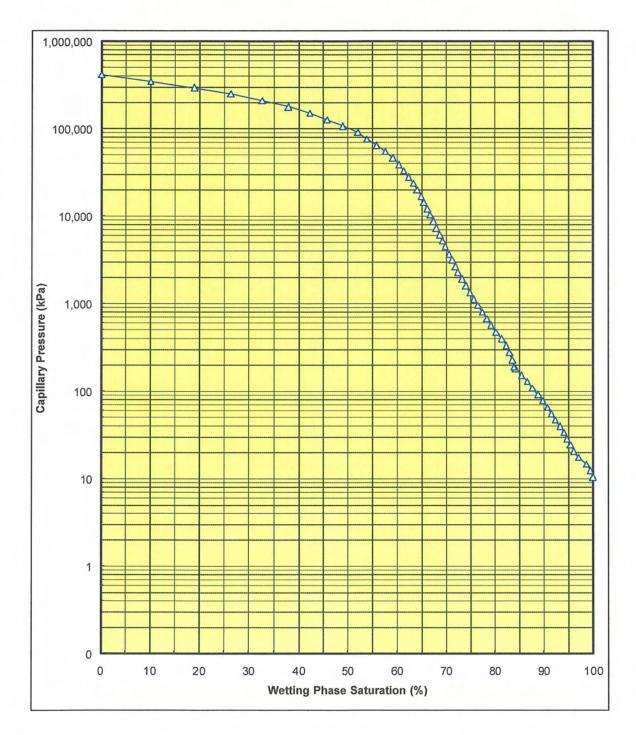


October 2010

W/O: 10RE2695

Figure 3B: Derived Air/Water Capillary Pressure vs. Wetting Phase Saturation - SP-3

SP-3 Sample: Hg Porosity: 3.28 % Depth: 870.09 (m) Winland Permeability 0.0013 mD

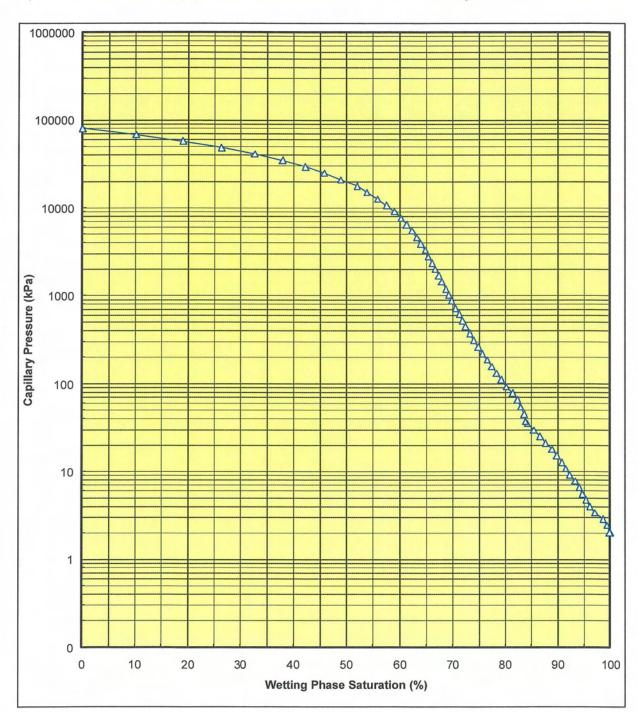

Section 3 - Schedule 9 October 2010

W/O: 10RE2695

Figure 3C: Pore Distribution - SP-3



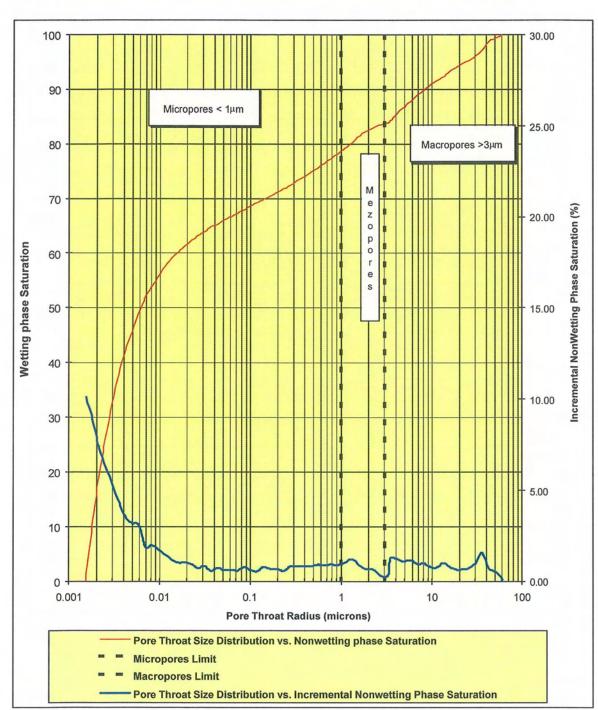


Figure 3D: Pore Distribution Histogram - SP-3

 Sample:
 SP-3
 Hg Porosity:
 3.28 %

 Depth:
 870.09 (m)
 Winland Permeability
 0.0013 mD



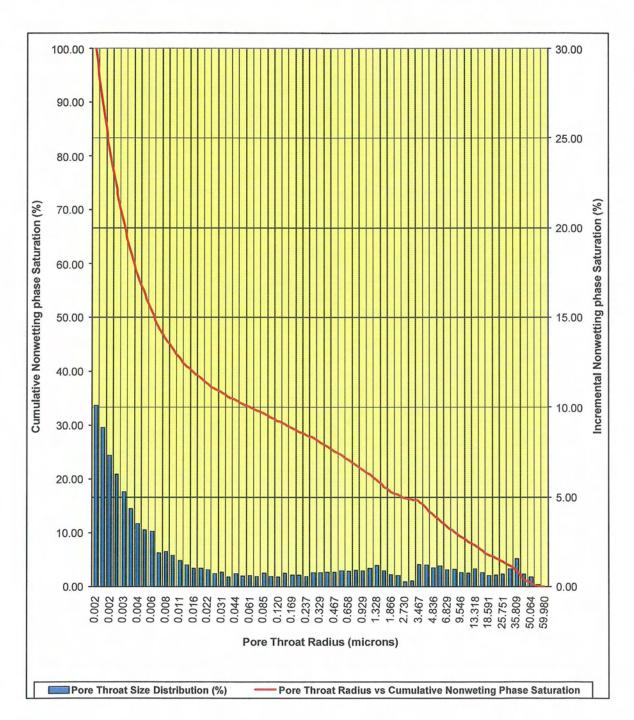


Figure 3E: Height Above Free Water - Equivalent Gas/Brine System - SP-3


 Sample:
 SP-3
 Hg Porosity:
 3.28 %

 Depth:
 870.09 (m)
 Winland Permeability
 0.0013 mD

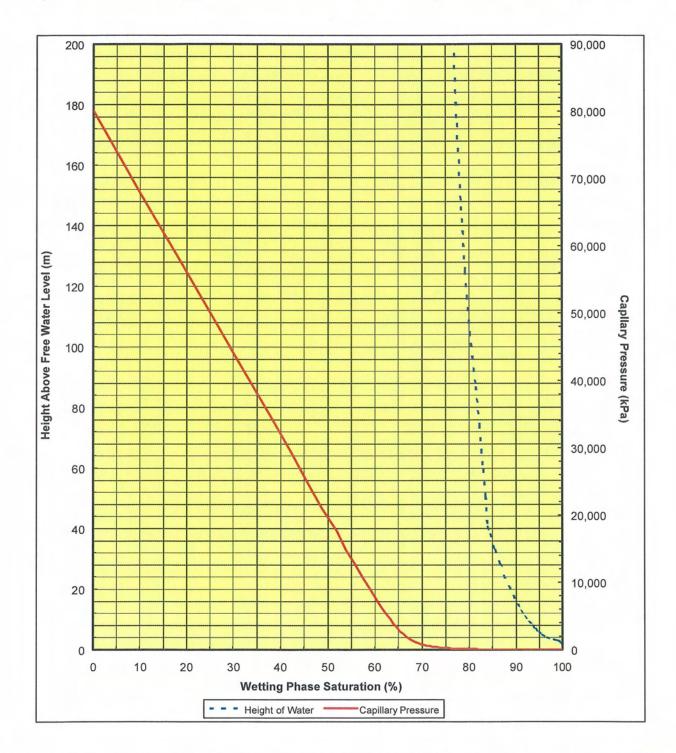

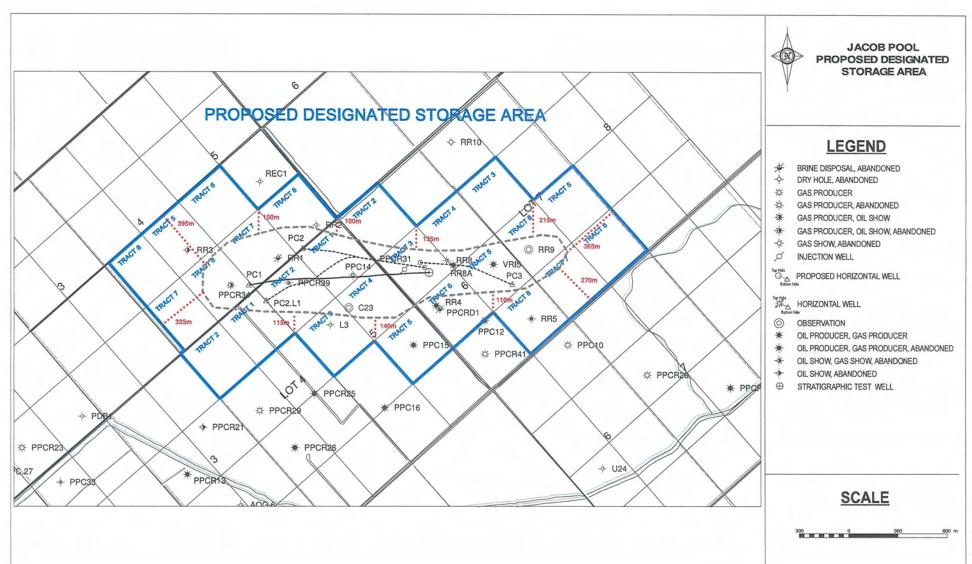

EB-2011-0013\0014\0015 Section 3 - Schedule 10

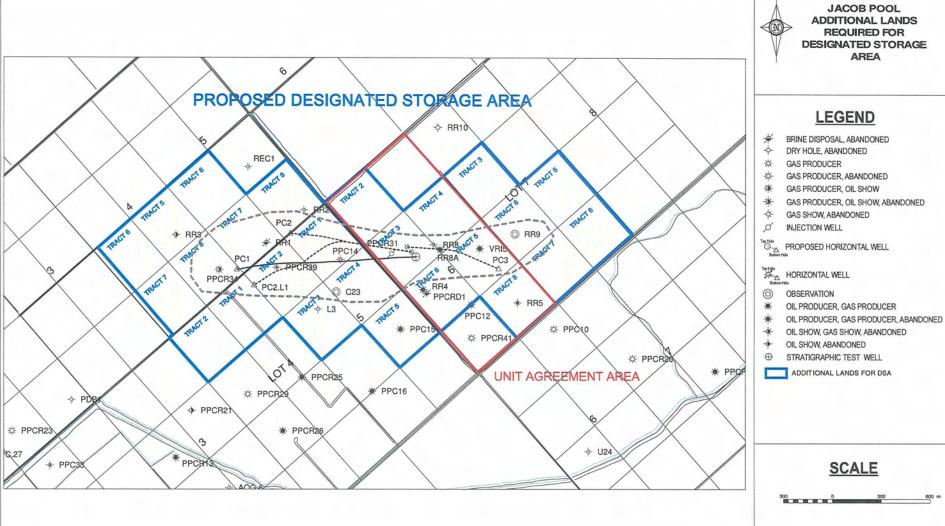

ADDITIONAL LANDS REQUIRED FOR DESIGNATED STORAGE





RECORD OF TECHNICAL DATA REVIEWED FOR A PROPOSED DESIGNATED GAS STORAGE AREA


	Onland	PROP	DSED DESIGNATED	GAS STORAGE AREA			
Date:	December 8, 2010						
Proponent:			Union Ga	as			
	(Name)		(Represent	ing)			
DSA Name	: Jacob Pool	· · · · · · · · · · · · · · · · · · ·					
Zone(s):	Trenton						
Area:	Tracts	Lots	Concs.	Township			
	5,6,7,8	4	5 East Division	Dover			
	6,7,8	5	5 East Division	Dover			
	1,2	4	4 East Division	Dover			
	1,2,3,4,5	5	4 East Division	Dover			
	2,3,4,5,6,8	6	4 East Division	Dover			
······································	3,5,6,7,8	7	4 East Division	Dover			
DATA SUB							
O	Well Data	Caian		I/chemical Data			
Completion re DST	ecord		Seismic profile				
Draw down te	net .	Seismic, Geological interpretation √ Gravity					
Build-up test	.51	Magnetic					
Pressure surv	/ev		hemical:				
Other:		Other					
COMMENT	-c.			Data Retained: Yes √ No			
OOMINICITY	0.						
Ministry sta	ff are in agreement v	with the propo	osed area and bound	laries? √ Yes No			
			- Petroleum Resourc	2 Ctoff			
				- Contain			
	OSA has been appro- signed copy of this form t			Yes			
Name	<u> </u>	Signa	ature	Date			

MNR Use Only

Checklist	 Initial	Date	Comments
DSA Boundary Plotted			
DSA File Created			

Jacob Pool Production History

	Cumulative Production	Bottom Hole	e Pressure	P_c/Z	Well
Date	(10 ³ m³)	(kPag)	(kPaa)	(kPaa/Z)	
15-Jan-88	0.0	7927	8026.3	9601.0	PPC 14
20-Jun-90	12790.7	5582	5681.3	6456.1	PPC 14
07-Jun-90	12653.9	5588	5687.3	6463.8	RR 9
19-Jun-91	18108.9	5167	5266.3	5928.0	PPC 31
10-Aug-91	18839.2	5472	5571.3	6315.2	PPC 34
30-Jun-92	32842.6	2331	2430.3	2562.1	PPC 39
27-Jul-92	33695.6	2057	2156.3	2259.0	PPC 39
19-Jan-96	51022.4	1053	1152.3	1179.8	PPC 34
20-Jul-98	56424.3	758	857.3	871.9	PPC 34
July, 1998	56409.3	682	781.3	793.3	PPC 14
27-May-99	57851.8	1215	1314.3	1350.6	PPC 39
14-Sep-06	64883.6	395	494.3	498.7	PPC 34
23-Nov-09	66134.2	181.1	280.4	281.5	PPC 34

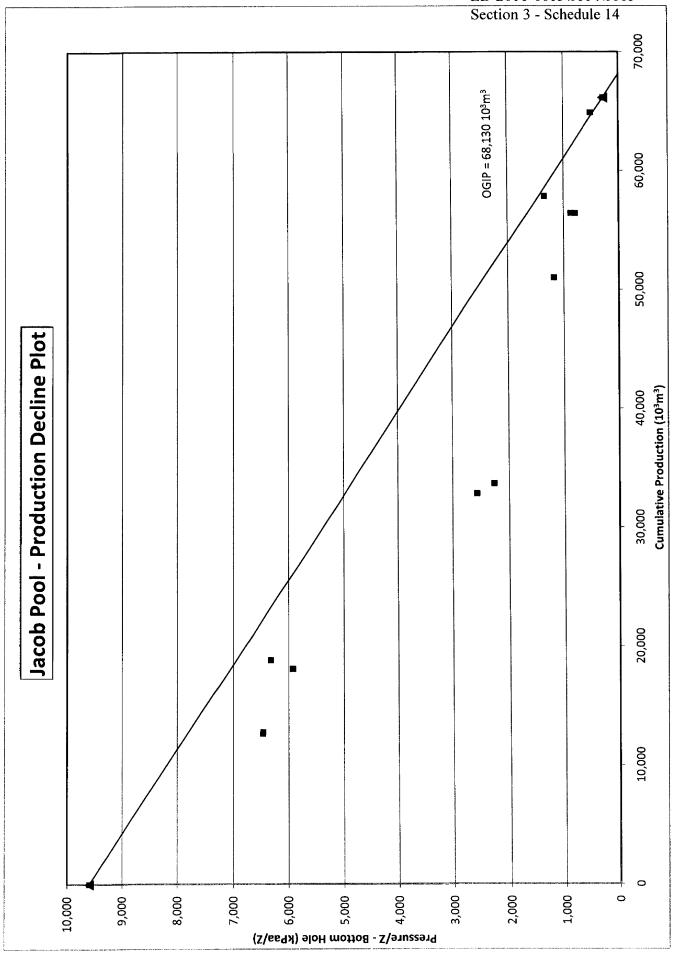

SECTION 4

PROPOSED FACILITIES

Description of Proposed Facilities

- 1. A total of four I/W wells (includes one multilateral) and two observation wells are planned to operate the Jacob Pool.
- 2. A NPS 8 pipeline will be constructed from Union's existing Dover Transmission Station to the Jacob Pool Compressor Station
- 3. Approximately 1,829 metres of gathering lines is required to connect the wells to the compression station. A compressor station will be required to operate the Jacob Pool. A valve site to be located within the existing Dover Transmission Station is also required at the connection from the transmission line to the Panhandle system at the Dover Transmission Station
- 4. A drawing of the proposed facilities can be found at Section 4—Schedule 1.
- 5. Union proposes to construct the facilities in accordance with its standard construction procedures and the environmental mitigation measures outlined in the ER.

<u>Wells</u>

- 6. The development of the Jacob Pool will include four I/W wells in order to allow complete cycling of the entire working inventory on an annual basis. Pain Court 2 (Horiz. #1), Dover 3-6-IVE ("PC2") and Pain Court 3 (Horiz. #1), Dover 3-6-IVE ("PC3") are proposed I/W wells to be drilled at new surface locations. Pain Court 2 (Horiz. #1, Lat. #1), Dover 3-6-IVE ("PC2.L1") is proposed as a horizontal lateral to be drilled from the PC2 wellbore. PC1 was drilled as a stratigraphic test well and will be used as an I/W well. The existing PPCR34 well will be converted to an I/W well.
- 7. The Jacob Pool development will also include two observation wells. Existing wells RR9 and CanEnerco/CNR #23 ("C23") will be converted to observation wells. RR9 will be

completed to monitor pressure in the Trenton Group while C23 will monitor the pressure in both the Trenton Group and Black River Group. Well information and schematics for these wells is shown in Section 3 – Schedule 6.

- 8. The surface and downhole locations of these wells are illustrated on Section 3 Schedule 5. A copy of the MNR Applications for Well License (Form 1) and survey maps are included in Section 4 Schedule 2. Well locations were selected based on information from all wells within the DSA and the seismic interpretation.
- 9. The I/W wells will be drilled using a combination of rotary and cable tool drilling methods. Section 4 Schedule 3 describes the drilling procedure that Union will employ for the drilling. Section 4 Schedule 4 outlines the casing specifications for the proposed storage wells. All wells will be drilled and completed in accordance with CSA Z341-10 and the *Oil*, *Gas and Salt Resources Act ("OGSRA")*, *Provincial Operating Standards (Version 2.0)*.
- 10. Access to the proposed wells will be provided by permanent all-weather access roads as shown on the drawing attached to the landowner Acknowledgements found in Section 7-Schedule 9.
- 11. In order to begin well drilling in January 2012, materials will be ordered in November 2011.
- 12. No well abandonments are planned as part of this project.

Station Facilities

13. An additional compressor station and piping will be installed at the corner of Maple Line and Jacob Road. The compressor station will consist of all the necessary piping and valves to direct gas flow, a 740 Hp reciprocating compressor package complete with jackshaft driver gas cooler, a natural gas dehydration package, ultrasonic flow measurement and pressure regulation and flow control.

14. The valve site at the Dover Transmission Station will consist of provisions for a future pig launcher and receiver, and the necessary valving to tie into the existing NPS 16 and NPS 20 Panhandle lines.


Pipeline Facilities

- 15. A NPS 8 pipeline will be constructed from the Dover Transmission Station to the Jacob Pool Compressor Station (Section 4-Schedule 1). The pipeline will be approximately 4,712 metres in length.
- 16. The Jacob Pool will require 1,829 metres of NPS 8 and 6 gathering lines (Section 4-Schedule 1). The proposed pipelines are designed to transport the expected flows to and from the new wells. These pipelines will be constructed between April 27, 2012 and June 21, 2012 using the existing access road network.
- 17. Design and pipe specifications for the proposed storage gathering pipelines are outlined in Section 4-Schedule 5. All the design specifications are in accordance with the *Ontario Regulation 210/01 for Oil and Gas Pipeline Systems*.
- 18. The Maximum Operating Pressure ("MOP") for the proposed gathering pipelines is 9930 kPa. The MOP for the proposed transmission pipeline is 6040 kPa.
- 19. The proposed pipelines are located primarily within a Class 1 location. For a pipeline within a Class 1 location, Union uses location factors of 0.9 for general locations, 0.75 for road crossings, 0.625 for pipe within a station and a design factor of 0.8. For a pipeline within a Class 2 location, Union uses location factors of 0.9 for general locations, 0.625 for road crossings, 0.625 for pipe within a station and a design factor of 0.8.
- 20. Union proposes to design the pipeline to meet or exceed Class 2 location requirements. The pipeline design and pipe specifications can be found in Section 4-Schedule 4.
- 21. Section 4-Schedule 6 describes the techniques and methods of construction that Union will employ for the construction of the proposed pipelines.

EB-2011-0013 EB-2011-0014 EB-2011-0015 Section 4 - Page 4


- 22. The pipelines will be installed in accordance with all applicable codes and Union's standard pipeline construction procedures.
- 23. In order for construction of the proposed NPS 8 transmission pipeline to commence in April, 2012 pipe, valves and all other materials will be ordered by February 17, 2012. The proposed construction schedule is found in Section 4-Schedule 7.





Oil, Gas and Saft Resources Act Application for a Well Licence

COCATION County Kent Township Dover It 3 Lot 6 Concession 4 Lake Erie: Block Tract Frie licence or lease number Som-hole location Bottom-hole Latitude 42°22′33.844° N Bottom-hole Longitude 82°21′01.044° W ace location metres from Lot Boundaries 565.95 m North South X Latitude 42°22′39.954° N 184.75 m East X West Longitude 82°20′28.388° W in 1.6 km of Designated Storage Area? Yes No X Off-larget? Yes No X FELL PARTICULARS Vertical Horizontal X Directional Despening Re-entry Type: Rotary X Cable X Well to be cored? Yes No X Formation at TD Sherman Falls and Elevation 175.4 Proposed Depth TMD 1539.0 Proposed Depth TVD 930.0 Proposed Start Date Sep. 2011 ANDOWNER Bess ROPOSED CASING AND CEMENTING PROGRAM Re Size Casing Weight Grade New, Setting O. (kg/m) Setting Setting Formation How Cement National Type (kg/m) Set Type (kg/m) (in-hole TVD (kg/m) Cashole New, Setting Depth (mm) O.D. (kg/m) Responsed Depth TVD Set Type (kg/m) (in-hole TVD (kg/m) Set Type (kg/m) No X (kg/m) Depth (in-hole TVD (kg/m) Depth (in-hole TVD (kg/m) Set Type (kg/m) No X (kg	_	ned operator a									
AME OF OPERATOR Union Gas Limited To 519 439-4588 AME OF OPERATOR Union Gas Limited To 519 439-4588 ass 50 Keil Drive North, Charliam, Ontario, NYM 5M1 Fax 6 519 436-4589 COCATION County Kerl Township Dover It 3 Lot 6 Concession 4 Lake Eric Block Tract Effe licence or lease number In this kind of Designated Storage Area? Ves No K Off-Largal? Yes No K In 1.6 km of Designated Storage Area? Ves No K Off-Largal? Yes No K PARTICULARS Vertical Horizontal Directional Desparing Re-entry If yee Riday X Cable X Well to be cored? Yes No X Farmation at TD Shemman Falls and Elimation 175.4 Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls and Elimation 175.4 Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls and Elimation 175.4 Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls and Elimation 175.4 Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls and Elimation 175.4 Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls and Linking ContractOrk (if known) and Shemman Falls In 1.6 km Off Designated Storage Area? Ves No X Farmation at TD Shemman Falls ANDOWNER Be Storage Area? Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls ANDOWNER Be Storage Area? Proposed Deph Mo 1539.0 Proposed Deph No X Farmation at TD Shemman Falls Be Storage Area? Proposed Deph Mo X Setting Formation No X Farmation at TD Shemman Falls Be Storage Area? Proposed Deph Mo X Setting Formation No X Farmation Area Mo X Setting Formation No X Farmation Area Mo X Setting Formation No X Farmation Area Mo X Setting Formation No X Farmation No		-						the Regulations the	ereunder and	submits	
AME OF OPERATOR Union Gas Limited Tel # 519 436-4569 ess 50 Keill Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 50 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 50 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 50 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, Chathang, Ontario, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax # 519 436-4560 cs 60 Keil Drive North, N7M 5M1 Fax	WELL NAM	ME Pain	Court 2 (Ho	oriz. #1), Do	ver 3 - 6 - 4			Target Form	ation	Shermar	ı Fall
So So Nail Drive North, Chatham, Ondario, N7M SM1 CocaTron CocaTron County Kent Township Dover Lake Effec Block Tract Final & 519 436-4560 CocaTron Lake Effec Block Tract Final Effections or leaser number In the licensor or lease	ose of Pr	oposed Well ((Well Type)	Natur	al Gas Storaç	је					
COLITION County Kent Township Dover It is license or lease number If the license or lease nu	IAME OF	OPERATOR	Unio	n Gas Limit	ed				Tel#	519 436-45	68
Tract If the licence or lease number If the licence or lease	ress 50	Keil Drive No	orth, Chatha	ım, Ontario,	N7M 5M1				Fax#	519 436-45	60
Efei licence or lease number	OCATION	N C	ounty Ke	ent	delica de la companio	ana ana ao Maisir ao ah aka an an aka	Township	Dover	anno a como a de la como a como a PREMINE a como del Tre	Mark on a second Mark on the article of the second	
m-hole location Bottom-hole Latitude 42°2233.844°N Bottom-hole Longitude 82°21'01.044°W see location metres from Lot Boundaries	t	3 Lot	6	Co	oncession		4	Lake Erie:	Block	Tra	act
South Sout	Erie lice	nce or lease r	umber								
184.75 m East X West Longitude 82°20'28.389" W	om-hole k	ocation	Bottom-ho	le Latitude		12°22'33.844"	N Botton	n-hole Longitude	8:	2°21'01.044" V	V
in 1.6 km of Designated Storage Area? Yes No X Off-target? Yes No X Particulars Morizontal Morizontal Deepening Re-entry	ace locati	on metres fro	m Lot Bour	idaries	565.95	m North	South X	Latitude	4	2°22'30.954"	V
FELL PARTICULARS Vertical					184.7	5 m East	X West	Longitude	8	2°20'28.389" V	V
Type: Rotary X Cable X Well to be cored? Yes No X Formation at TD Sherman Falls and Elevation 175.4 Proposed Depth TMD 1539.0 Proposed Depth TVD 930.0 Proposed Start Date Sep. 2011 ANDOWNER ess ing unit shown on attached survey plan is pooled (see O.Reg. 245/97 definitions: "pooled spacing unit") Yes No X RILLING CONTRACTOR (if known) ess ROPOSED CASING AND CEMENTING PROGRAM Re Size Casing Weight Grade New, Setting Setting Formation How Cement O.D. (kg/m) Used or Depth In-hole TVD Yes Start Type KB / RF 1095.0 466.00 76.49 Line ppe New 22.0 Kettle Point Driven N/A N/A 187.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Cabot Head Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1817.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1818.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1819.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1819.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0.10 1.9 1819.3 339.7 70.	in 1.6 km	of Designate	d Storage A	rea?	Yes	NoX		Off-target?	Yes	No	X
ANDOWNER ess and contractor (if known) ess ROPOSED CASING AND CEMENTING PROGRAM Resize Casing Weight Grade New, Used or Depth TVD O.D. (Kg/m) (ÆLL PAR	RTICULARS	V	ertical [Horizon	ital X	Directional [Deepening [Re-entry	y []	
ess ing unit shown on attached survey plan is pooled (see O.Reg.245/97 definitions: "pooled spacing unit") Yes No X RILLING CONTRACTOR (if known) ess ROPOSED CASING AND CEMENTING PROGRAM Le Size Casing Weight Grade New, Setting Setting Formation How Cament Cement To No (mm) O.D. (kg/m) In-hole TVD Set Type CBPth In-hole TVD Set Type CBPth In-hole TVD CBPth In-hole CEMENTER OF A SIZE CASING AND CEMENTAL OF A SIZE CBPTH OF A SIZE	Гуре:	Rotary X	Cable	x	Well to be co	ored? Yes	No X	Formation at TD	Sherman F	-alls	
and the property of the proper	nd Elevat	tion 175	i,4 Propo	sed Depth TMD	1539.0	Proposed De	pth TVD 93	0.0 Propose	d Start Date	Sep. 2011	
ess RILLING CONTRACTOR (if known) ess ROPOSED CASING AND CEMENTING PROGRAM Re Size Casing Weight Grade New, Setting Setting Formation How Cement Cement To (mm) (mm) (mm) (January 1974) (January 197	ANDOWN			·				•	_		_
RILLING CONTRACTOR (if known) ess ROPOSED CASING AND CEMENTING PROGRAM Re Size Casing (weight Grade New, Setting O.D. (kg/m) (mm) (mm) (mm) (mm) (mm) (mm) (mm) (_	TEN .		American (00000 111000		
### Page 128	ess		_;								
Re Size Casing Weight Grade New, Setting Depth (kg/m) Used or Depth (mm) Used or In-hole TVD Set Type KB / RF (mm) (mm) Used or Depth (mm) Used or In-hole TVD Set Type KB / RF (mm) Used or Depth (mm) Used or Depth (mm) Used or In-hole TVD Set Type KB / RF (mm) Used or Depth (mm) Used Occurred Used Oct. 1.0					oled (see O.R	eg.245/97 defi	initions: "pooled space	sing unit")	Yes	No.	> X .
He Size Casing (New) Cament (Reg/m) (R	ORILLING ress	CONTRACTO	OR (if know	n)		eg.245/97 defi	initions: "pooled space	sing unit")	Yes	[] No) [X]
106.0 406.00 76.49 Line pipe New 22.0 Kettle Point Driven N/A N/A N/A 887.3 339.70 71.43 H-40 New 95.5 Dundee Cemented 0:10 1.9 11.0 244.50 53.57 K-55 New 616.5 Cabot Head Cemented 0:8:0; 0:1:0 4.6 122.0 177.80 34.23 K-55 New 880.0 Cobourg Cemented 0:1:0 4.6 122.0 177.80 S4.23 K-55 New 880.0 Cobourg Cemented 0:1:0 4.6 1.6 1.6 1.6 1.6 1.6 1.6 1.6 1.6 1.6 1	PRILLING ress	CONTRACTO	OR (if know	n)		eg.245/97 defi	initions: "pooled space	cing unit")			Language of the second of the
11.0 244.50 53.57 K-55 New 616.5 Cabot Head Cemented 0:8:0; 0:1:0 4.6 222.0 177.80 34.23 K-55 New 880.0 Cobourg Cemented 0:8:0; 0:1:0 4.6 LOW-OUT PREVENTION EQUIPMENT Ling Head, Annular Preventer, Blind Rams, Pipe Rams, Lubricator; 7" Valve ELL SECURITY Pensa & Associates, e of Trustee 1236596 Ontario Limited Address 130 Dufferin Ave., London, ON, N6A 5R3 519 667-4018 Fax # 519 434-9656 Total # unplugged wells 212 Current Balance \$ 70.00 REMARKS ENCLOSURES: Fee X Location Plan X (Land wells only) Drilling Program X AUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or stee a well in the above location, and he/she has authority to bind the operator.	RILLING ress	CASING ALCOHOLD	ND CEMEN Weight	n)	GRAM New, Used or	Setting Depth			CASING How	SETTING INF	ORMATION Cement To
LOW-OUT PREVENTION EQUIPMENT Ling Head, Annular Preventer, Blind Rams, Pipe Rams, Lubricator; 7" Valve Pensa & Associates,	RILLING ess ROPOSE lle Size	CONTRACTO CONTRACTO CASING AI Casing O.D. (mm)	ND CEMEN Weight (kg/m)	n) ITING PROO	GRAM New, Used or in-hole	Setting Depth TVD	Setting Fo	ormation	CASING How Set	SETTING INF Cement Type	ORMATION Cement To KB / RF
ELL SECURITY Pensa & Associates, of Trustee 1236596 Ontario Limited Address 130 Dufferin Ave., London, ON, N6A 5R3 519 667-4018 Fax # 519 434-9656 Total # unplugged wells 212 Current Balance \$ 70.0 REMARKS ENCLOSURES: Fee X Location Plan X (Land wells only) Drilling Program X SUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or the a well in the above location, and he/she has authority to bind the operator.	RILLING ess ROPOSE le Size mm)	CASING AI Casing O.D. (mm) 406.00	ND CEMEN Weight (kg/m) 76.49	TING PROG	GRAM New, Used or in-hole New	Setting Depth TVD 22.0	Setting Fo	ormation Point	CASING How Set Driven	SETTING INF Cement Type N/A	ORMATION Cement To KB / RF
e of Trustee 1236596 Ontario Limited Address 130 Dufferin Ave., London, ON, N6A 5R3 519 667-4018 Fax # 519 434-9656 Total # unplugged wells 212 Current Balance \$ 70,0 REMARKS ENCLOSURES: Fee X Location Plan X (Land wells only) Drilling Program X SUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or tale a well in the above location, and he/she has authority to bind the operator.	RILLING PSS ROPOSE ROPO	Casing O.D. (mm) 406.00 339.70 244.50	ND CEMEN Weight (kg/m) 76.49 71.43 53.57	Grade Line pipe H-40 K-55	New, Used or in-hole New New New	Setting Depth TVD 22.0 95.5 616.5	Setting Fo Kettile Dunn Cabot	ormation Point dee Head	CASING How Set Driven Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6
REMARKS ENCLOSURES: Fee X Location Plan X (Land wells only) Drilling Program X AUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or the above location, and he/she has authority to bind the operator.	RILLING ess ROPOSE le Size mm) 106.0 187.3 111.0 122.0	Casing O.D. (mm) 406.00 339.70 244.50 177.80	ND CEMEN Weight (kg/m) 76.49 71.43 53.57 34.23	Grade Line pipe H-40 K-55 K-55	New, Used or in-hole New New New New	Setting Depth TVD 22.0 95.5 616.5 880.0	Setting Fo Kettle Duni Cabot Cobo	ormation Point dee Head	CASING How Set Driven Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6
ENCLOSURES: Fee X Location Plan X (Land wells only) Drilling Program X AUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or take a well in the above location, and he/she has authority to bind the operator.	RILLING ess ROPOSE le Size mm) 106.0 187.3 111.0 122.0 LOW-OUT ling Head	Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTIC J, Annular Pre	Weight (kg/m) 76.49 71.43 53.57 34.23	Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pip	New, Used or in-hole New New New New	Setting Depth TVD 22.0 95.5 616.5 880.0	Setting For Kettle Duni Cabot Cobo	Point dee Head burg	CASING How Set Driven Cemented Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6
SUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or the a well in the above location, and he/she has authority to bind the operator.	RILLING PROPOSE ROPOSE	CONTRACTO Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTION I, Annular Pre	ND CEMEN Weight (kg/m) 76.49 71.43 53.57 34.23 DN EQUIPP venter, Blin	Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pip	New, Used or in-hole New New New New New	Setting Depth TVD 22.0 95.5 616.5 880.0	Setting Fo	Point dee Head ourg Pensa 130 Dufferin Ave	CASING How Set Driven Cemented Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6 4.6
AUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or stee a well in the above location, and he/she has authority to bind the operator.	RILLING ess ROPOSE le Size mm) 106.0 187.3 11.0 122.0 LOW-OU ting Head	CONTRACTO Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTION Annular Pre- CURITY Ree 519 667-4018	ND CEMEN Weight (kg/m) 76.49 71.43 53.57 34.23 DN EQUIPP venter, Blin	Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pip	New, Used or in-hole New New New New New	Setting Depth TVD 22.0 95.5 616.5 880.0	Setting Fo	Point dee Head ourg Pensa 130 Dufferin Ave	CASING How Set Driven Cemented Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6 4.6
AUTHORITY: The undersigned certifies that the information provided herein is complete and accurate, the operator has the right to drill or stee a well in the above location, and he/she has authority to bind the operator.	RILLING ess ROPOSE lole Size lomm) 406.0 887.3 811.0 222.0 LOW-OU ting Head	CONTRACTO Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTION Annular Pre- CURITY Ree 519 667-4018	ND CEMEN Weight (kg/m) 76.49 71.43 53.57 34.23 DN EQUIPP venter, Blin	Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pip	New, Used or in-hole New New New New New	Setting Depth TVD 22.0 95.5 616.5 880.0	Setting Fo	Point dee Head ourg Pensa 130 Dufferin Ave	CASING How Set Driven Cemented Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6 4.6
	RILLING ess ROPOSE Me Size mm) 106.0 887.3 311.0 1222.0 LOW-OU' ting Head TELL SEC e of Trust	CONTRACTO Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTION I, Annular Pre CURITY Idee 519 667-4018	ND CEMEN Weight (kg/m) 76.49 71.43 53.57 34.23 DN EQUIPP venter, Blin 1236	Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pip	New, Used or in-hole New New New New See Rams, Lub	Setting Depth TVD 22.0 95.5 616.5 880.0 pricator; 7" Val Addr 56 To	Setting Fo	Point dee Head ourg Pensa 130 Dufferin Ave	CASING How Set Driven Cemented Cemented Cemented London, Of	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0 0:1:0	ORMATION Cement To KB / RF N/A 1.9 4.6 4.6
11-Jan-11 Name Steven Pardy, P.Eng. Signature	RILLING ess ROPOSE le Size mm) 106.0 187.3 111.0 122.0 LOW-OUTing Head ELL SEC e of Trust REMARK	CONTRACTO Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTIC 3, Annular Pre CURITY Idee 519 667-4018 S	Weight (kg/m) 76.49 71.43 53.57 34.23 ON EQUIPP venter; Blin 1236 3 Fa	TING PRO Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pip 596 Ontario	New, Used or in-hole New New New New Limited 519 434-969	Setting Depth TVD 22.0 95.5 616.5 880.0 Addr Addr Addr X (Lan	Setting For Kettle Duni Cabot Cobo	Point dee Head Durg Pensa 130 Dufferin Ave	CASING How Set Driven Cernented Cemented Cemented Cemented Cemented Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0 S., N, N6A 5R3	ORMATION Cement To KB / RF N/A 1.9 4.6 4.6
	RILLING ess ROPOSE le Size mm) 106.0 187.3 11.0 122.0 LOW-OU ting Head ELL SEC e of Trust REMARK	CONTRACTO Casing O.D. (mm) 406.00 339.70 244.50 177.80 T PREVENTION Annular Pre CURITY tee 519 667-4018	Weight (kg/m) 76.49 71.43 53.57 34.23 ON EQUIPP venter, Blin 1236 Fee X ensigned ce location, ar	TING PROOF Grade Line pipe H-40 K-55 K-55 MENT d Rams, Pig style="text-align: right;"> MENT d Rams, Pig drugs ax #	New, Used or in-hole New New New New See Rams, Lub Limited Location Pla he information as authority to	Setting Depth TVD 22.0 95.5 616.5 880.0 Addr Addr Addr To X (Lan n provided her o bind the open	Setting For Kettlie Duni Cabot Cobo	Pensa 130 Dufferin Ave Is 212 Drilling Program accurate, the opera	CASING How Set Driven Cernented Cemented Cemented Cemented Cemented Cemented Cemented	SETTING INF Cement Type N/A 0:1:0 0:8:0; 0:1:0 0:1:0 S., N, N6A 5R3	ORMATION Cement To KB / RF N/A 1.9 4.6 4.6

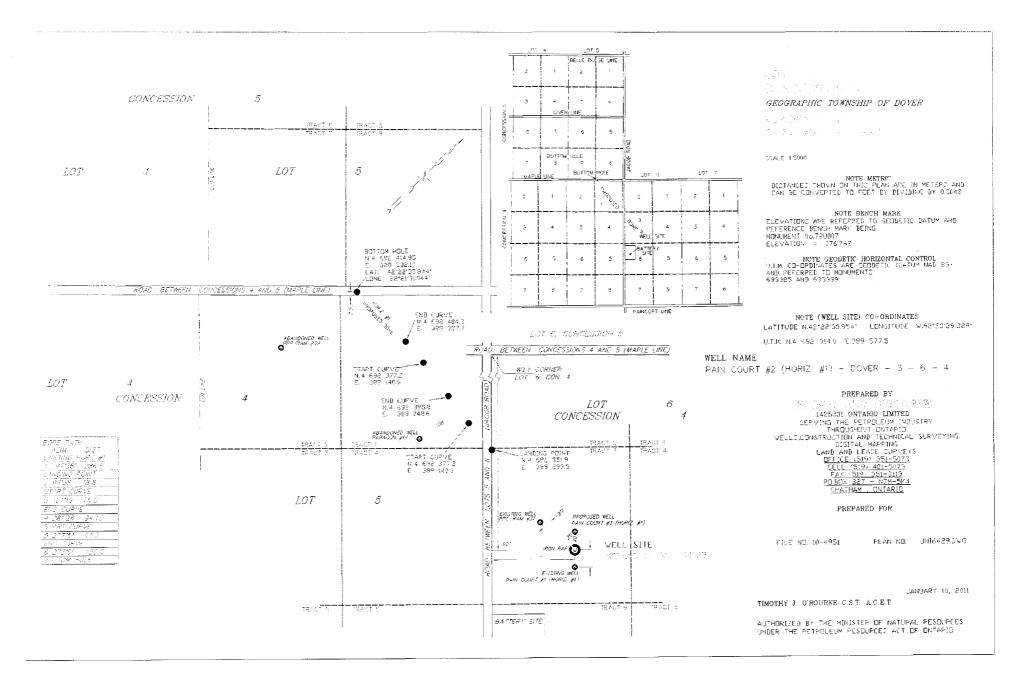





Oil, Gas and Salt Resources Act

Application for a Well Licence

orm 1				,	o the Minister of	Matural Resources				v.1999-01-07
					il, Gas and Salt F 00 + 13% HST.	Resources Act and	the Regulations the	reunder and	submits	
WELL NA		•		. #1), Dover 3	6.4		Target Form	ation	Shermar	ı Fall
	roposed Well			ral Gas Stora			_		0.10.1114	
	OPERATOR		W * * * * * * * * * * * * * * * * * * *	COMMENTS OF THE STATE OF THE SERVICE	90	мин		T.14	540 400 4	
			n Gas Limit					Tel#	519 436-45	
dress 5	60 Keil Drive N		m, Ontario,	N7M 5M1	****			Fax#	519 436-45	60
LOCATIO	N C	ounty Ke	ent			Township	Dover			
ct	3 Lot	6	Co	ncession	4	~~~	Lake Erie:	Block	Tra	ict
ke Erie lice	ence or lease i	number	an anamacani in ta a carri							
ttom-hole	location	Bottom-ho	le Latitude	#807 THERE WEE	42°22'23.404" N	Bottom	-hole Longitude	82	2°21'10.276" V	V
rface locat	tion metres fro	om Lot Bour	ıdaries	565.95	m North	South X	Latitude	4	2°22'30.954 " I	1
				184.75	m East	X West	Longitude	82	2°20'28.389" V	V
lhin 1.6 km	n of Designate	d Storage A	rea?	Yes	No X		Off-target?	Yes	No	x
WELL PA	RTICULARS	Ve	ertical	Horizor	ntal X D	irectional	Deepening	Re-entry	, []	
j Type:	Rotary X	Cable	x	Well to be co	ored? Yes	No X	Formation at TD	Sherman F	alls	
ound Eleva			sed Depth TMD		t) () Proposer	Start Date	Sep., 2011	- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1
LANDOW			704 D 0 P 41 1 1 1 1 1			- mak been bases		Tel#	300, 201,	AT THE RESEARCH AND ADDRESS OF
_	TER .									
dress										
dress									NAN IAAN dagan digita ana kanang sasan sa	
PROPOSE	ED CASING A	ND CEMEN	TING PROC	GRAM	I I			CASING	SETTING INF	ORMATION
lole Size (mm)	Casing O.D. (mm)	Weight (kg/m)	Grade	New, Used or in-hole	Setting Depth TVD	Setting Fo	mation	How Set	Cement Type	Cement Top KB / RF
										ale de como del la male de las les les pergentes que pergente de la como dela como de la
	<u> </u>									
BLOW-OU	T PREVENTION	ON EQUIPM	IENT							
ating Head	d, Annular Pre	venter; Blind	d Rams, Pip	e Rams, Lub	ricator; 7" Valve					
							,			
WELL SEC me of Trus	CURITY			1 ::41	Addres	s	Pensa a	& Associates London, ON		
110 01 1140		1236	596 Ontario	Limited					I, NOA ORO	
	tee							_		TO A TOTAL WEST AND RESTORATE MANAGEMENT AND A
			596 Ontario	519 434-96		l#unplugged wells	212	Current	Balance \$	70,00
#	tee 519 667-4018					l# unplugged wells	212	Current		70,00
# REMARK	tee 519 667-4018	3 Fa	x#	519 434-96		l # unplugged wells	212	Current		70,00
# REMARK eral drilled	tee 519 667-4018 (S from Pain Co	3 Fa	ix# #1) wellbore	519 434-96	56 Tota	# unplugged wells	212 Drilling Program	Current		70,06
REMARK ral drilled ENCLOS	tee 519 667-4018 S from Pain Co URES:	B Faurt 2 (Horiz#Fee X	ix# f1) wellbore	519 434-96	n X (Land v	vells only)		[X]	Balance \$	70,00
# REMARK eral drilled ENCLOS AUTHOR rate a well	tee 519 667-4018 S from Pain Co URES:	B Faurt 2 (Horiz#Fee X	ix# f1) wellbore rhifies that th	519 434-96	n X (Land v	vells only)	Drilling Program	[X]	Balance \$	70,00
# REMARK eral drilled ENCLOS AUTHOR rate a well	519 667-4018 S from Pain Co URES: ETY: The under	Fee X ersigned cerocation, and	ix# f1) wellbore rhifies that th	519 434-969 Location Plane informations authority to	n X (Land v	vells only) is complete and a or. Signat	Drilling Program	X or has the rig	Balance \$	70,0


EB-2011-0013\0014\0015 Section 4 - Schedule 2

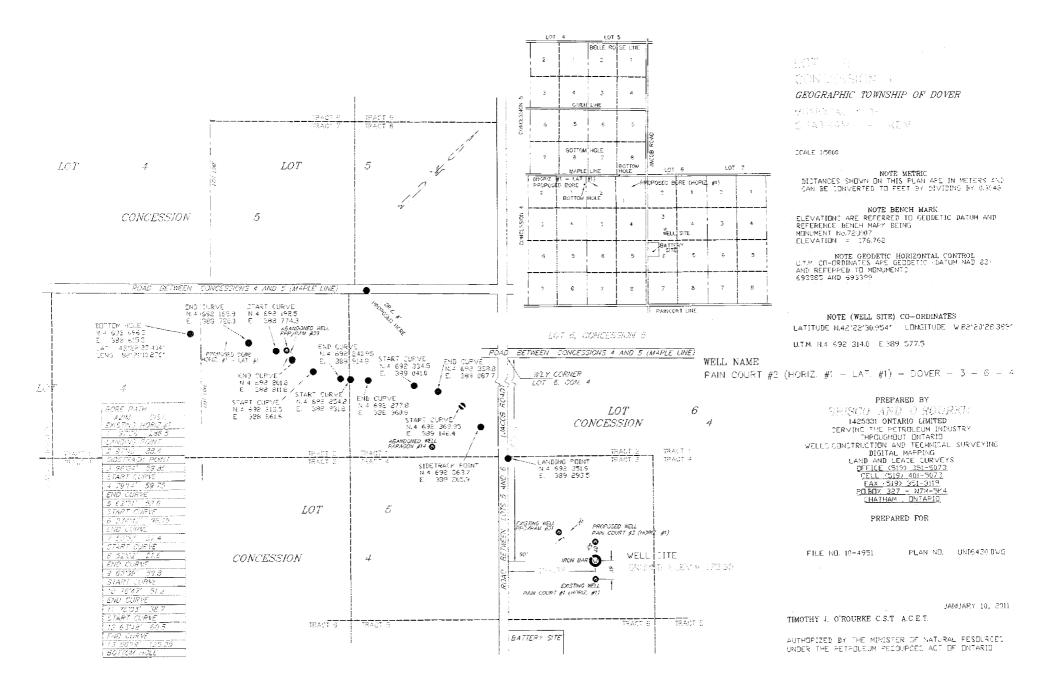



Oil, Gas and Salt Resources Act Application for a Well Licence

				under the C	Fo the Minister Fil, Gas and Sa OO + 13% HST	lt Resou		the Regulations the	ereunder and		v.1999-01-07
1. WELL NAM	ME Pair	n Court 3 (H	oriz. #1), Do	ver 3 - 6 - 4				Target Form	ation	Sherma	ı Fatl
Purpose of Pr	oposed Well	(Well Type)) Natui	al Gas Stora	ge						
. NAME OF	OPERATOR	Unic	n Gas Limit	ed					Tel#	519 436-45	668
ddress 50) Keil Drive N	orth, Chath	am, Ontario,	N7M 5M1					Fax#	519 436-45	660
. LOCATION	i (County K	ent				Township	Dover			
ract	3 Lot	6	Co	ncession		4		Lake Erie:	Block	Tra	act
ake Erie licer	nce or lease	number									
ottom-hole id	ocation	Bottom-ho	ole Latitude	100 (100 to 100	42°22'28.19" N	٧	Botton	n-hole Longitude	8	2°20'04.91" V	<i>I</i>
urface location	on metres fro	om Lot Bou	ndaries	849.60	m North	1 [X]	South	Latitude	4	2°22'31.913"	N
				184.70	m East	x	West	Longitude	82	2°20'29.568" \	٧
ithin 1.6 km	of Designate	ed Storage A	Area?	Yes	No X			Off-target?	Yes	No	X
WELL PAR	RTICULARS	V	ertical	Horizor	ntal X	Direction	onal	Deepening	Re-entry	, []	
ig Type:	Rotary	Cable	x	Well to be co	ored? Yes	X	No 🗍	Formation at TD	Sherman F	alls	
round Elevat	ion 17:	5.4 Propo	sed Depth TMD	1450.0	Proposed De	oth TVO	99	0.0 Proposed	d Start Date	November	2011
LANDOWN		184-185	,	** ************************************			and the second second	The second secon	Tel	20	
ddress	EN							AND THE RESIDENCE OF THE PARTY	16:		
dress	CONTRACT			GRAM							
Hole Size (mm)	Casing O.D.	Weight (kg/m)	Grade	New, Used or in-hole	Setting Depth TVD		Setting Fo	rmation	CASING How Set	SETTING INF Cement Type	ORMATION Cement Top KB / RF
406.0	(mm) 406.00	76.49	Line pipe	New	22.0		Kettle I	Point	Driven	N/A	N/A
387.3	339.70	71.43	H-40	New	95.5		Dund		Cemented	0:1:0	1.9
311.0 222.0	244.50 177.80	53.57 34.23	K-55 K-55	New New	616.5 880.0		Cabot I Cobo		Cemented Cemented	0:8:0; 0:1:0 0:1:0	4.6 4.6
				e Rams, Lut	oricator; 7" Val	ve		Pensa	& Associates	,	
ame of Truste	519 667-4018		596 Ontario	Limited 519 434-96	Addr	1940	nplugged well	130 Dufferin Ave.	i a ann a ma seo ann an ann ann ann an ann	I, N6A 5R3 Balance \$	70,00
. REMARKS	3	** ** *** *******									
. ENCLOSU	IRES:	Fee X		Location Pla	n X (Lan	d wells	only)	Drilling Program	[X]	•	
		_			n provided here		omplete and a	accurate, the operat		ht to drill or	
	n ine above 1-Jan-11	Name		Pardy, P.En	·	ator.	Signat	ture			
te of Birth		Δpril	24 1970		Title			ager Reservoir En	aineerina an	d Drilling	

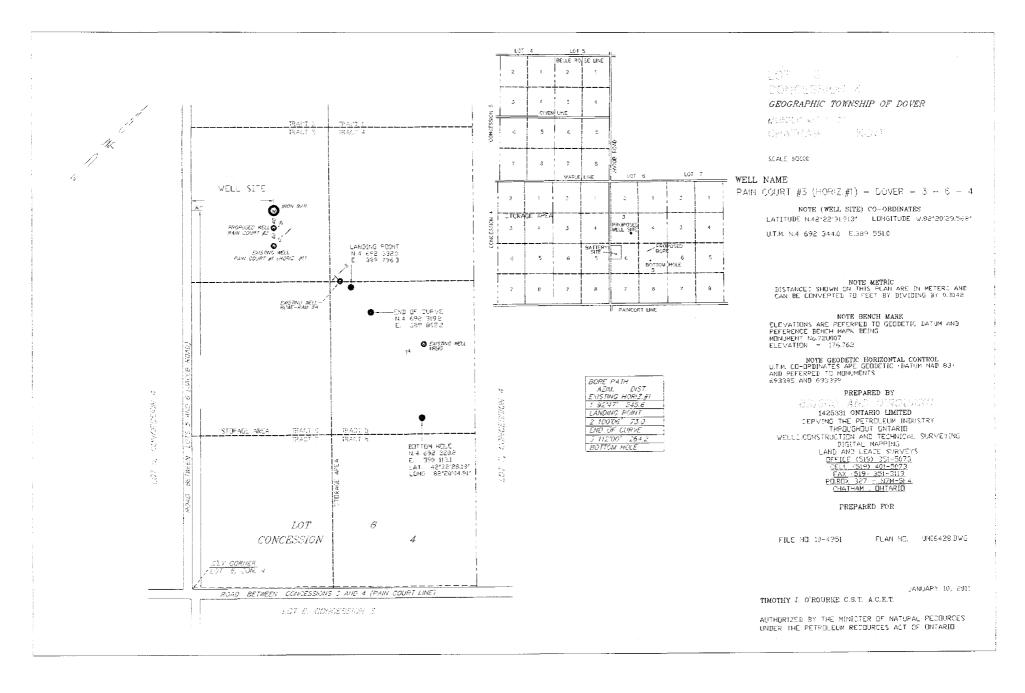

Pain Court 2 (Horiz. #1), Dover 3 - 6 - 4

CONDUCTOR HOLE

- 1. Underground Storage to notify M.N.R. 48 hours prior to spud.
- 2. Move in and rig up cable tool drilling rig.

Note: All depths referenced to 4.6 mKB

3. Drill and drive 406 mm conductor pipe 1 m into Kettle Point (22 mKB) with a 406 mm bit. Ensure that fresh water is shut off before proceding.

Note: Record fresh water interval

4. Record conductor casing OD, weight, grade and set depth.

SURFACE HOLE

5. Drill 5 m into Dundee (96 mKB) with a 387.3 mm bit.

Note: One sample shall be collected every 3 m once Kettle Point is reached.

- Run 339.7 mm surface casing to bottom (96 mKB) with centralizers 2m above shoe and at joints 2 and
 Tack weld guide shoe on bottom. The optimum makeup torque is 4170 N-m (3070 ft-lb) and the maximum makeup torque is 5210 N-m (3840 ft-lb).
- 7. Record surface casing OD, weight, grade, placement of cementing hardware and set depth.
- 8. Raise surface casing 0.5 m off bottom and set in slips. Cement 339.7 mm surface casing to surface as per cementing program.
- 9. Wait on cement (W.O.C.) for 24 hours.
- 10. Record cement top in casing.
- 11. Rig out cable tool rig.

INTERMEDIATE HOLE

- 12. Rig in rotary drilling rig (KB = 4.6 m).
- 13. Pressure Test entire BOP system to 1900 kPag for 10 minutes and record results in log according to OGSRA Operating Standards v 2.0 sec.4.5.21
- 14. Drill out cement and shoe with 311 mm bit.
- 15. Drill a maximum of 0.5 m of new formation
- 16. Using a low volume, high pressure pump, pressure test the formation at a pressure equivalent to a gradient of 18 kPa/m for 10 minutes using an incompressible fluid.
- 17. Drill until top of Cabot Head formation (603 mKB) with 311 mm, surveying every 30m.

Note: Geologist must be on site to verify top of Cabot Head.

- 18. Drill into the Cabot Head formation (603 mKB) with 311 mm bit until directed by company personnel
- 19. Run 244.5 mm intermediate casing to bottom with float collar at top of bottom joint. Centralizers should be placed 2 m above shoe, at joints 2, 4 and 5 and every 5th joint to surface.
 - Cement basket should be placed above Detroit River formation. Threadlock guide shoe on bottom. The optimum makeup torque is 7690 N-m (5660 ft-lb) and the maximum makeup torque is 8300 N-m (6110 ft-lb). Land casing at proper elevation for thread-on type casing bowl.
- 20. Install circulating head, circulate minimum 1 hole volume, Observe returns over shaker, ensure clean returns prior to cementing.
- 21. Record intermediate casing OD, weight, grade, placement of cementing hardware and set depth.
- 22. Prepare to cement 244.5 mm intermediate casing to surface.
- 23. Hold safety meeting with all on-site personal.
- 24. Pressure test surface equipment to 15 MPag for 1 minute. Ensure no leaks.
- 25. Pump citric acid followed by fresh water pre-flush. Cement to surface as per cementing program. Ensure cement returns to surface. Take a minimum of four cement samples. Record all circulating pressures and volumes.
- 26. W.O.C. for 48 hours.
- 27. Cased Hole Logging. See LOGGING PROGRAM, Log Run 1.

Pain Court 2 (Horiz. #1), Dover 3 - 6 - 4

Production Hole

- 28. Pressure Test Pipe Rams to 1400 kPag for ten minutes. Pressure Test entire BOP system to 7000 kPag for 10 minutes and record results in log according to OGSRA Operating Standards v 2.0 sec. 4.5 (This pressure test also tests the casing and casing bowl requirement of 5,500 kPag.)
- 29. Drill out cement and shoe with 222 mm bit.
- 30. Drill a maximum of 0.5 m of new formation with 222 mm bit.
- 31. Prepare for Pressure Integrity Test (P.I.T.). Using a low volume, high pressure pump, pressure test the formation at a pressure equivalent to a gradient of 18 kPa/m for 10 minutes using an incompressible fluid.
- 32. Rig in directional drilling contractor.
- 33. Hold safety meeting with all on-site personnel.
- 34. Continue drilling 222 mm hole to KOP 19 m into Cabot Head formation (603 mKB) to 622 mKB using brine as a drilling fluid. Clean hole.
- 35. Kick off and build angle as per directional drilling contractor until 2 m into Cobourg (943 mKB MD, 880 mKB TVD) or directed by company personnel.

Note: Geologist will be onsite to verify top of Collingwood formation.

- 41. Run 177.8 mm production casing to 942mKB with insert float at top of bottom joint. Centralizers should be placed on every joint until above the curve and every 5th joint to surface. Tack weld guide shoe on bottom. The optimum makeup torque is 4630 N-m (4260 ft-lb) and the maximum makeup torque is 4630 N-m (3410 ft-lb).
- 42. Record production casing OD, weight, grade, placement of cementing hardware and set depth.
- 43. Ensure that a collar is not positioned where the wellhead seals need to be installed.
- 44. Prepare to cement 177.8 mm production casing to surface.
- 45. Hold safety meeting with all on-site personal.
- 46. Pressure test surface equipment to 15 MPag for 1 minute. Ensure no leaks.
- 47. Pump citric acid followed by fresh water pre-flush. Cement to surface as per cementing program. Displace cement with fresh water. Ensure cement returns to surface or arrange for remedial cementing from surface. Take a minimum of four cement samples to verify setup time and density. Record all circulating pressures and volumes.
- 48. Set Casing Slips
- 49. W.O.C. for 48 hours.
- 50. Cased Hole Logging. See LOGGING PROGRAM, Log Run 2.
- 51. Pressure test wellhead and production casing to 15,500 kPag for four (4) hours.

MAIN HOLE - HORIZONTAL

- 52. Drill out cement, shoe and 0.5 m of new formation with 158.8 mm bit.
- 54. Prepare for Pressure Integrity Test (P.I.T.). Using a low volume, high pressure pump, pressure test the formation at a pressure equivalent to a gradient of 18 kPa/m for a duration of ten (10) minutes using an incompressible fluid.
- 55. P.O.O.H. and rig in directional drilling contractor.
- 56. Rig in seperator, flare stack. Pressure/function test equipment. Record results.
- 57. Continue drilling horizontal section to 1539 mKB MD as per directional drilling contractor.
- 58. One sample shall be collected every 6 m from the production casing to TD.
- 59. Prepare to drill Lateral 1 well bore. See Pain Court #2 (Horiz#1, Lat#1) Drilling Program
- 66. Underground Storage to notify M.N.R. within 48 hours after TD is reached.

Pain Court 2 (Horiz. #1, Lat. #1), Dover 3 - 6 - 4

MAIN HOLE - HORIZONTAL

- 1. Underground Storage to notify M.N.R. 48 hours prior to spud.
- 2. R.I.H to KOP(1160mKb)
- 3. Continue drilling horizontal section to 1827 mKB MD as per directional drilling contractor.
- 4. One sample shall be collected every 6 m from the production casing to TD.
- 5. P.O.O.H. Rig out directional driller, seperator, flare stack.
- 6. Rig in loggers.
- 7. Set wireline retrievable release plug in vertical section (~400 mKB MD). Check for gas.
- 8. Rig out loggers.
- 9. Rig out rotary drilling rig.
- 10. Install Master Valve and Blind Flange.
- 11. Pressure test wellhead and production casing to 15,500 kPag for four (4) hours.
- 12. Underground Storage to notify M.N.R. within 48 hours after TD is reached.

Pain Court 3 (Horiz. #1), Dover 3 - 6 - 4

CONDUCTOR HOLE

- 1. Underground Storage to notify M.N.R. 48 hours prior to spud.
- 2. Move in and rig up cable tool drilling rig.

Note: All depths referenced to 4.6 mKB

3. Drill and drive 406 mm conductor pipe 1 m into Kettle Point (22 mKB) with a 406 mm bit. Ensure that fresh water is shut off before proceding.

Note: Record fresh water interval

4. Record conductor casing OD, weight, grade and set depth.

SURFACE HOLE

5. Drill 5 m into Dundee (96 mKB) with a 387.3 mm bit.

Note: One sample shall be collected every 3 m once Kettle Point is reached.

- 6. Run 339.7 mm surface casing to bottom (96 mKB) with centralizers 2m above shoe and at joints 2 and 4. Tack weld guide shoe on bottom. The optimum makeup torque is 4170 N-m (3070 ft-lb) and the maximum makeup torque is 5210 N-m (3840 ft-lb).
- 7. Record surface casing OD, weight, grade, placement of cementing hardware and set depth.
- 8. Raise surface casing 0.5 m off bottom and set in slips. Cement 339.7 mm surface casing to surface as per cementing program.
- 9. Wait on cement (W.O.C.) for 24 hours.
- 10. Record cement top in casing.
- 11. Rig out cable tool rig.

INTERMEDIATE HOLE

- 12. Rig in rotary drilling rig (**KB = 4.6 m**). .
- 13. Pressure Test entire BOP system to 1900 kPag for 10 minutes and record results in log according to OGSRA Operating Standards v 2.0 sec.4.5.21
- 14. Drill out cement and shoe with 311 mm bit.
- 15. Drill a maximum of 0.5 m of new formation
- 16. Using a low volume, high pressure pump, pressure test the formation at a pressure equivalent to a gradient of 18 kPa/m for 10 minutes using an incompressible fluid.
- 17. Drill until top of Cabot Head formation (603 mKB) with 311 mm, surveying every 30m.

Note: Geologist must be on site to verify top of Cabot Head.

- 18. Drill into the Cabot Head formation (603 mKB) with 311 mm bit until directed by company personnel
- 19. Run 244.5 mm intermediate casing to bottom with float collar at top of bottom joint. Centralizers should be placed 2 m above shoe, at joints 2, 4 and 5 and every 5th joint to surface. Cement basket should be placed above Detroit River formation. Threadlock guide
 - shoe on bottom. The optimum makeup torque is 7690 N-m (5660 ft-lb) and the maximum makeup torque is 8300 N-m (6110 ft-lb). Land casing at proper elevation for thread-on type casing bowl.

 Install circulating head, circulate minimum 1 hole volume. Observe returns over shaker, ensure clean
- 20. Install circulating head, circulate minimum 1 hole volume, Observe returns over shaker, ensure clean returns prior to cementing.
- 21. Record intermediate casing OD, weight, grade, placement of cementing hardware and set depth.
- 22. Prepare to cement 244.5 mm intermediate casing to surface.
- 23. Hold safety meeting with all on-site personal.
- 24. Pressure test surface equipment to 15 MPag for 1 minute. Ensure no leaks.
- 25. Pump citric acid followed by fresh water pre-flush. Cement to surface as per cementing program. Ensure cement returns to surface. Take a minimum of four cement samples. Record all circulating pressures and volumes.
- 26. W.O.C. for 48 hours.

Pain Court 3 (Horiz. #1), Dover 3 - 6 - 4

27. Cased Hole Logging. See LOGGING PROGRAM, Log Run 1.

Production Hole

- 28. Pressure Test Pipe Rams to 1400 kPag for ten minutes. Pressure Test entire BOP system to 7000 kPag for 10 minutes and record results in log according to OGSRA Operating Standards v 2.0 sec. 4.5 (This pressure test also tests the casing and casing bowl requirement of 5,500 kPag.)
- 29. Drill out cement and shoe with 222 mm bit.
- 30. Drill a maximum of 0.5 m of new formation with 222 mm bit.
- 31. Prepare for Pressure Integrity Test (P.I.T.). Using a low volume, high pressure pump, pressure test the formation at a pressure equivalent to a gradient of 18 kPa/m for 10 minutes using an incompressible fluid.
- 32. Drill to 1 m into Georgian Bay/Blue Mountain formation

Note: Geologist will be onsite to verify top of Blue Mountain formation.

- 33. POOH
- 34. Hold safety meeting with all on-site personnel.
- 35. Rig in Coring Contractor, Core 18m as per coring program, POOH
- 36. Complete Microfrac as per micro frac program.
- 37. Rig in Directional Contractor
- 38. Ream hole to bottom
- 39. Continue drilling 222 mm hole to KOP 20 m into Georgian Bay/Blue Mountain formation (740 mKB) to 760 mKB using brine as a drilling fluid. Clean hole.
- 40. Hold safety meeting with all on-site personnel.
- 41. Kick off and build angle as per directional drilling contractor until 2 m into Cobourg (887.5 mKB MD, 880 mKB TVD).

Note: Geologist will be onsite to verify top of Cobourg formation.

- 42. Run 177.8 mm production casing to 886.5mKB with insert float at top of bottom joint. Centralizers should be placed on every joint until above the curve and every 5th joint to surface. Tack weld guide shoe on bottom. The optimum makeup torque is 4630 N-m (4260 ft-lb) and the maximum makeup torque is 4630 N-m (3410 ft-lb).
- 43. Record production casing OD, weight, grade, placement of cementing hardware and set depth.
- 44. Ensure that a collar is not positioned where the wellhead seals need to be installed.
- 45. Prepare to cement 177.8 mm production casing to surface.
- 46. Hold safety meeting with all on-site personal.
- 47. Pressure test surface equipment to 15 MPag for 1 minute. Ensure no leaks.
- 48. Pump citric acid followed by fresh water pre-flush. Cement to surface as per cementing program. Displace cement with fresh water. Ensure cement returns to surface or arrange for remedial cementing from surface. Take a minimum of four cement samples to verify setup time and density. Record all circulating pressures and volumes.
- 49. Set Casing Slips
- 50. W.O.C. for 48 hours.
- 51. Cased Hole Logging. See LOGGING PROGRAM, Log Run 2.
- 52. Install Wellhead and Master Valve
- 53. Pressure test wellhead and production casing to 15,500 kPag for four (4) hours.

MAIN HOLE - HORIZONTAL

- 54. Drill out cement, shoe and 0.5 m of new formation with 158.8 mm bit.
- 55. Prepare for Pressure Integrity Test (P.I.T.). Using a low volume, high pressure pump, pressure test the formation at a pressure equivalent to a gradient of 18 kPa/m for a duration of ten (10) minutes using an incompressible fluid.

Pain Court 3 (Horiz. #1), Dover 3 - 6 - 4

- 56. P.O.O.H. and rig in directional drilling contractor.
- 57. Rig in seperator, flare stack. Pressure/function test equipment. Record results.
- 58. Continue drilling horizontal section to 1450 mKB MD as per directional drilling contractor.
- 59. One sample shall be collected every 6 m from the production casing to TD.
- 60. P.O.O.H. Rig out directional driller, seperator, flare stack.
- 61. Rig in loggers.
- 62. Set wireline retrievable release plug in vertical section (~400 mKB MD). Check for gas.
- 63. Rig out loggers.
- 64. Rig out rotary drilling rig.
- 65. Install Master Valve and Blind Flange.
- 66. Pressure test wellhead and production casing to 15,500 kPag for four (4) hours.
- 67. Underground Storage to notify M.N.R. within 48 hours after TD is reached.

Pain Court 2 (Horiz. #1), Dover 3 - 6 - 4

CONDUCTOR CASING SUMMARY (Referenced to 4.6 m KB-GL)

	Metric	Imperial
Description	Value Ur	nit Value
Тор	0.0 mK	(B 0.0
Bottom	22.0 mK	KB 72.2
Outside Diameter	406.00 mm	n 15.984
Weight	76.49 kg/	m 51.4
Drift Diameter	390.60 mm	n 15.378
Inside Diameter	390.60 mm	n 15.378 inches
Grade	Line pipe	Line pipe
Thread	N/A	N/A
Coupling	Welded	Welded
Burst	N/A kPa	a N/A psi
Collapse	N/A kPa	a N/A psi
Pipe Body Yield Strength	N/A dal	N N/A lb-f
Joint Strength	N/A dal	N N/A lb-f
Torque - Optimum	N/A N-r	m N/A ft-lb
Torque - Maximum	N/A N-r	m N/A ft-lb
Condition	New	
Float Equipment	None	
Shoe	Drive	
Threadlock	Tack weld driv	e shoe on bottom joint of casing

SURFACE CASING SUMMARY (Referenced to 4.6 m KB-GL) Metric Imperial

	Metric	Imperial
Description	Value Unit	Value Unit
Тор	0.0 mKB	0.0 ftKB
Bottom	95.5 mKB	313.3 ftKB
Outside Diameter	339.70 mm	13.374 inches
Weight	71.43 kg/m	48.0 lb/ft
Drift Diameter	319.00 mm	12.559 inches
Inside Diameter	322.96 mm	12.715 inches
Grade	H-40	H-40
Thread	8 Rd.	8 Rd.
Coupling	ST & C	ST & C
Burst	11,930 kPa	1,730 psi
Collapse	5,100 kPa	740 psi
Pipe Body Yield Strength	240,600 daN	541,000 lb-f
Joint Strength	143,200 daN	322,000 lb-f
Torque - Optimum	4,170 N-m	3,070 ft-lb
Torque - Maximum	5,210 N -m	3,840 ft-lb
Condition	New	
Float Equipment	None	
Centralizers	Joints 2,4 and 6	
Shoe	Guide	
Threadlock	Threadlock guide s	shoe on bottom joint of casing

Pain Court 2 (Horiz. #1), Dover 3 - 6 - 4

INTERMEDIATE CASING SUMMARY (Rotary: 4.6 m KB-GL) Metric Imperial

	Metric	Imperial	
Description	Value Unit	Value Unit	
Тор	0.0 mKB	0.0 ftKB	
Bottom	616.5 mKB	2022.6 ftKB	
Outside Diameter	244.50 mm	9.626 inches	
Weight	53.57 kg/m	36.0 lb/ft	
Drift Diameter	222.63 mm	8.765 inches	
Inside Diameter	226.59 mm	8.921 inches	
Grade	K-55	K-55	
Thread	8 Rd.	8 Rd.	
Coupling	LT & C	LT & C	
Burst	24,270 kPa	3,520 psi	
Collapse	13,930 kPa	2,020 psi	
Pipe Body Yield Strength	250,900 daN	564,000 lb-f	
Joint Strength	217,500 daN	489,000 lb-f	
Torque - Optimum	7,690 N-m	5,660 ft-1b	
Torque - Maximum	8,300 N-m	6,110 ft-lb	
Condition	New		
Float Equipment	Float Collar (Top o	f 1 st joint)	
Centralizers	Joints 2,4 & 5; eve	ry 5 th joint & 10 m from surfa	се
Cement Basket	Run above Detroit		

Shoe Guide

Threadlock Threadlock guide shoe on bottom joint of casing

PRODUCTION CASING SUMMARY (Rotary: 4.6 m KB-GL)

	Metric	Imperial
Description	Value Unit	Value Unit
Тор	0.0 mKB	0.0 ftKB
Bottom	942.0 mKB	3090.6 ftKB
Outside Diameter	177.80 mm	7.000 inches
Weight	34.23 kg/m	23.0 lb/ft
Drift Diameter	156.24 mm	6.151 inches
Inside Diameter	161.70 mm	6.366 inches
Grade	K-55	K-55
Thread	8 Rd.	8 Rd.
Coupling	LT & C	LT & C
Burst	30,060 kPa	4,360 psi
Collapse	22,550 kPa	3,270 psi
Pipe Body Yield Strength	162,800 daN	366,000 lb-f
Joint Strength	137,400 daN	309,000 lb-f
Torque - Optimum	5,790 N-m	4,260 ft-lb
Torque - Maximum	4,630 N-m	3,410 ft-lb
Condition	New	
		. ct .

Float Collar (Top of 1st joint) Float Equipment

Every Joint from bottom to top of curve and every 5th joint Centralizers

to surface; 10 m from surface

Shoe

Threadlock guide shoe on bottom joint of casing Threadlock

Pain Court 3 (Horiz. #1), Dover 3 - 6 - 4

CONDUCTOR CASING SUMMARY (Referenced to 4.6 m KB-GL)

	Metric	Imperial
Description	Value Unit	Value
Тор	0.0 mKB	0.0
Bottom	22.0 mKB	72.2
Outside Diameter	406.00 mm	15.984
Weight	76.49 kg/m	51.4
Drift Diameter	390.60 mm	15.378
Inside Diameter	390.60 mm	15.378 inches
Grade	Line pipe	Line pipe
Thread	N/A	N/A
Coupling	Welded	Welded
Burst	N/A kPa	N/A psi
Collapse	N/A kPa	N/A psi
Pipe Body Yield Strength	N/A daN	N/A lb-f
Joint Strength	N/A daN	N/A lb-f
Torque - Optimum	N/A N-m	N/A ft-lb
Torque - Maximum	N/A N-m	N/A ft-lb
Condition	New	
Float Equipment	None	
Shoe	Drive	
Threadlock	Tack weld drive s	three on bottom joint of ca

Threadlock Tack weld drive shoe on bottom joint of casing

SURFACE CASING SUMMARY (Referenced to 4.6 m KB-GL)

	Metric	Imperial		
Description	Value Unit	Value Unit		
Тор	0.0 mKB	0.0 ftKB		
Bottom	95.5 mKB	313.3 ftKB		
Outside Diameter	339.70 mm	13.374 inches		
Weight	71.43 kg/m	48.0 lb/ft		
Drift Diameter	319.00 mm	12.559 inches		
Inside Diameter	322.96 mm	12.715 inches		
Grade	H-40	H-40		
Thread	8 Rd.	8 Rd.		
Coupling	ST & C	ST & C		
Burst	11,930 kPa	1,730 psi		
Collapse	5,100 kPa	740 psi		
Pipe Body Yield Strength	240,600 da N	541,000 lb-f		
Joint Strength	143,200 da N	322,000 lb-f		
Torque - Optimum	4,170 N -m	3,070 ft-lb		
Torque - Maximum	5,210 N -m	3,840 ft-lb		
Condition	New			
Float Equipment	None			
Centralizers	Joints 2, 4 and 6			
Shoe	Guide			
Threadlock	Threadlock guide she	ne on bottom joint of c		

Threadlock guide shoe on bottom joint of casing

Pain Court 3 (Horiz. #1), Dover 3 - 6 - 4

INTERMEDIATE CASING SUMMARY (Rotary: 4.6 m KB-GL)

	Metric	Imperial
Description	Value Unit	Value Unit
Тор	0.0 mKB	0.0 ftKB
Bottom	616.5 mKB	2022.6 ftKB
Outside Diameter	244.50 mm	9.626 inches
Weight	53.57 kg/m	36.0 lb/ft
Drift Diameter	222.63 mm	8.765 inches
Inside Diameter	226.59 mm	8.921 inches
Grade	K-55	K-55
Thread	8 Rd.	8 Rd.
Coupling	LT & C	LT & C
Burst	24,270 kPa	3,520 psi
Collapse	13,930 kPa	2,020 psi
Pipe Body Yield Strength	250,900 daN	564,000 lb-f
Joint Strength	217,500 daN	489,000 lb-f
Torque - Optimum	7,690 N-m	5,660 ft-lb
Torque - Maximum	8,300 N-m	6,110 ft-lb
Condition	New	
Float Equipment	Float Collar (Top of	1 st joint)
Centralizers	Joints 2,4 & 5; every 5 th joint & 10 m from surface	
Cement Basket	Run above Detroit River formation	
Shoe	Guide	
Threadlock	Threadlock guide sh	noe on bottom joint of casing

PRODUCTION CASING SUMMARY (Rotary: 4.6 m KB-GL)

	Metric	Imperial
Description	Value Unit	Value Unit
Тор	0.0 mKB	0.0 ftKB
Bottom	886.5 mKB	2908.5 ftKB
Outside Diameter	177.80 mm	7.000 inches
Weight	34.23 kg/m	23.0 lb/ft
Drift Diameter	156.24 mm	6.151 inches
Inside Diameter	161.70 mm	6.366 inches
Grade	K-55	K-55
Thread	8 Rd.	8 Rd.
Coupling	LT & C	LT & C
Burst	30,060 kPa	4,360 psi
Collapse	22,550 kPa	3,270 psi
Pipe Body Yield Strength	162,800 daN	366,000 lb-f
Joint Strength	137,400 daN	309,000 lb-f
Torque - Optimum	5,790 N-m	4,260 ft-lb
Torque - Maximum	4,630 N-m	3,410 ft-lb
Condition	New	
Float Equipment	Float Collar (Top of 1 st joint)	
Centralizers	Every Joint from bo	ottom to top of curve and every 5 th joint
	to surface; 10 m fro	om surface
Shoe	Guide	
Threadlock	Threadlock guide s	hoe on bottom joint of casing

Design and Pipe Specifications

Jacob Storage Pool

Design Specifications

Mainline

Class Location Class 2 **Design Factor** 0.800 **Location Factor (General)** 0.900 Location Factor (Roads) 0.625 Maximum Operating Pressure -6040 kPa **Test Medium** Water Test Pressure 8456 kPa Valves / Fittings PN 100 Minimum Depth of Cover 1.0 m

Gathering Line

Class Location Class 2 **Design Factor** 0.800 **Location Factor (General)** 0.900 Location Factor (Roads) 0.625 Maximum Operating Pressure -9930 kPa Test Medium Water 13902 kPa **Test Pressure** Valves / Fittings PN 100 Minimum Depth of Cover 1.0 m

Pipe Specifications

Mainline

Size - NPS 8 Wall Thickness - 4.8 mm

Type - Electric Resistance Weld

Description - CSA Z245.1

Grade - 290 Category - I

Coating - Yellow Jacket

Gathering Line

Size - NPS 6

Wall Thickness - 4.8 mm & 5.8 mm

Type - Electric Resistance Weld

Description - CSA Z245.1

Grade - 290 Category - I

Coating - Yellow Jacket

Size - NPS 8

Wall Thickness - 5.3 mm & 7.5 mm

Type - Electric Resistance Weld

Description - CSA Z245.1

Grade - 290 Category - I

Coating - Yellow Jacket

GENERAL TECHNIQUES AND METHODS OF CONSTRUCTION

- 1. Union Gas Limited ("Union") will provide its own inspection staff to enforce Union's construction specifications and Ontario Regulation 210/01 under the Technical Standards and Safety Act 2000, Oil and Gas Pipeline Systems.
- 2. Minimal crews are expected to perform the construction of this pipeline given the scope of the pipeline facilities.
- 3. Union's contract specifications require the contractor to adhere to the requirements of the Occupational Health and Safety Act including the use of safety barricades, fences, signs or flashers, or to use flag persons as may be appropriate, around any excavation across or along a road.
- 4. It is Union's policy to restore the areas affected by the construction of the pipeline to "as close to original condition" as possible. As a guide to show the "original condition" of the area, photos and/or a video will be taken before any work commences. When the clean up is completed, the approval of the landowner or appropriate government authority is obtained.
- 5. Construction of the pipeline includes the following activities.

Locating Running Line

6. Union establishes the location where the pipeline is to be installed ("the running line"). For pipelines within road allowances, the adjacent property lines are identified and the running line is set at a specified distance from the property line. For pipelines located on private easement, the easement is surveyed and the running line is set at the specified distance from the edge of the easement. The distance from the start of the pipeline (or other suitable point) is marked on the pipeline stakes and the drawings.

Clearing and Grading

7. The right-of-way is prepared for the construction of the pipeline. When required, bushes, trees and crops are removed and the ground leveled. When required, the topsoil is stripped and stored, and/or sod is lifted.

Stringing

8. The pipe is strung adjacent to the running line. The joints of pipe are laid end-to-end on supports that keep the pipe off the ground to prevent damage to the pipe coating.

Welding

9. The pipe is welded into manageable lengths. The welds are then radiographically inspected and coated.

Trenching/Backfilling

10. Pipe may be buried using either the trench method or the trenchless method. All utilities that will be crossed or paralleled by the pipeline are located by the appropriate utility/operating company prior to installing the pipeline. Prior to trenching, all such utilities will be hand-located or by hydro-vacuuming

Trench Method: Trenching is done by using a trenching machine or hoe excavator depending upon the ground conditions. For gathering line construction, trenching activities are typically completed from an adjacent permanent gravel roadway or wellpad when applicable. Provisions are made to allow residents access to their property, as required. All drainage tiles that are cut during the trench excavation are flagged to signify that a repair is required. All cut tiles are surveyed for their location, measured and recorded as to size, depth, type and quality. This information is kept on file with Union and provided to the drainage consultant for the postconstruction tile design. If a repair is necessary in the future, Union will have an accurate method of locating the tile. Next, the pipe is lowered into the trench. The pipe coating is tested using a high voltage electrical tester as the pipe is lowered into the trench. All defects in the coating are repaired before the pipe is lowered in. Next, if the soil that was excavated from the trench is suitable for backfill, it is backfilled. If the soil is not suitable for backfill (such as rock), it is hauled away and the trench is backfilled with suitable material such as sand. After the trench is backfilled, drainage tile is repaired. Tile repairs are made by excavating back into the bank along the tile run and placing clear stone as a foundation for a perforated drainage pipe. A new drainage tile is cut to the appropriate length and installed between the two exposed tile ends. Prior to the actual setting of the perforated drainage tile, the existing tile run is checked to ensure that it is clear and undamaged within the limits of the work area. If it is not, further tile is excavated and the damaged tile is replaced to the edge of the work area. A company inspector,

and as required the lands relations agent, inspects each tile repair and acts as a liaison between the contractor, the landowner and/or municipality. If required, the landowner or municipal representative is requested to inspect tile repairs prior to backfill completion. Union undertakes that it is responsible for the tile repair and will be accountable for the tile repairs at any future date after construction of the pipeline.

Trenchless Method: Trenchless methods are alternate methods used to install pipelines under railways, roads, water courses, sidewalks, trees and lawns. There are a variety of trenchless methods that are used, depending on the soil conditions, and the length and size of the installation. These methods are boring and horizontal directional drilling (HDD).

Tie-Ins

11. The sections of pipelines that have been buried using either the trench or trenchless method are joined together (tied-in).


Cleaning and Testing

12. To complete the construction, the pipeline is cleaned, tested in accordance with Union's specifications using water and then dried.

Restoration

13. The final activity is the restoration. Topsoil is replaced, the work area is leveled, and sod is replaced in lawn areas and other grassed areas are re-seeded. Where required, concrete, asphalt and gravel are replaced. All work areas will be returned to as close to the original conditions as possible and to the satisfaction of the landowner or municipality.

Jacob Storage Pool Proposed Project Schedule

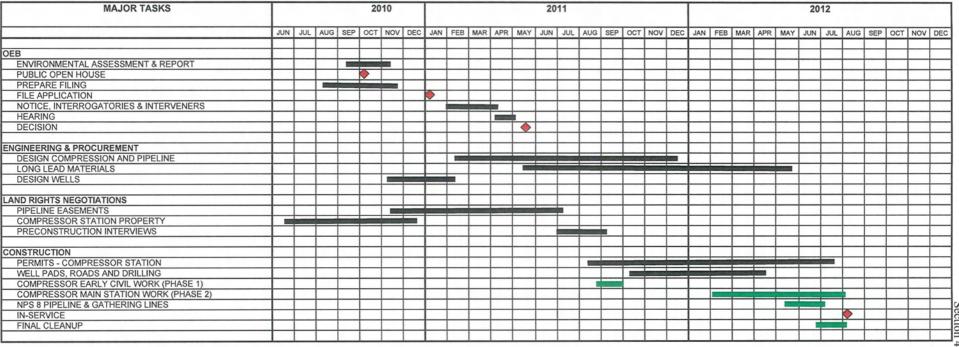

Jacob Storage Pool Proposed Project Schedule

Transmission and Gathering Pipeline Construction Schedule (Includes Dover Valve Site)

	2012													
ACTIVITY	APR MAY				JUNE					JULY				
	22	29	6	13	20	27	3	10	17	24	1	8	15	22
FIELD SURVEY		2 32	00.013V		33 m 15		S. Dec Sale							
GRADING				OK SPECIO		3								
STRINGING				Back to	27, 782									
WELDING				la de la constante de la const		- F4F25								
HDD						18.0								
DITCHING					(CESTATE)									
BACKFILL					nerous en		a-280, (a)							
TIE-INS														
TESTING								ak 4,755	3.0					
FINAL TIE-INS								F8385						
DOVER VALVE SITE				41545		MARK		, 15.5°	200					
FINAL CLEAN UP									Receive the					
COMMISSIONING / PURGE & PRESSURIZE	\pm									2				
FREE FLOW IN SERVICE (JULY 4, '12)											•			

SECTION 5

Proposed Storage Operation

- Storage operations are planned to commence at the Jacob Pool as early as May 2011.
 Initially the pool will be delta-pressured to a pressure gradient of 10.55 kPa/m (0.467 psi/ft).
 The performance of the reservoir will be monitored on a regular basis during injection and withdrawal cycles. The proposed monitoring program is provided in Section 5 Schedule

 By placing the facilities in-service no later than July 1, 2011 and delta-pressuring the pool to 9,150 kPaa bottom hole, the necessary cushion gas can be injected and the entire working capacity of the reservoir can be utilized in 2011.
- 2. The Jacob Pool will be operated at a cushion pressure of 2,170 kPaa corresponding to an inventory of 17,200 10³m³. The inventory of the Jacob Pool at a maximum operating pressure of 10,280 kPaa bottom hole (represents pressure gradient of 11.85 kPa/m or 0.524 psi/ft) will be approximately 86,600 10³m³, resulting in a working inventory of approximately 69,400 10³m³.
- 3. During injection and withdrawal, gas will be controlled, measured, compressed and filtered at the Jacob Pool compressor station located at the intersection of Maple Line and Jacob Road. The Jacob Pool will be connected to Union's integrated storage system by way of 4,700 metres of NPS 8 pipeline and a tie-in at Union Gas's Dover Transmission Station.
- 4. Union will own and operate the Jacob Pool facilities as defined under the *Oil, Gas and Salt Resources Act.* As operator, Union is accountable for the safe operation and maintenance of its facilities and will manage operations and maintenance of the Jacob Pool facilities. Union will utilize its Operations and Maintenance Procedures and Emergency Response Plans in operating and maintaining the pool.

Proposed Reservoir Monitoring Program Jacob Pool

The following are the key operational items in the monitoring program for the Jacob Pool's storage operation.

Observation Wells

- RR9 will be completed as an Observation well to monitor pressure in the Trenton formation.
- C23 will be completed as an Observation well to monitor pressure in both the Trenton and Black River formations.

Active Production Wells

 Producer will supply pressures for the following active production wells on a monthly basis.

<u>Well</u>	Formation	<u>Status</u>
VRI5	Black River	Gas Producer
RR4	Black River	Oil Producer/Gas Producer
PPC10	Trenton	Gas Producer
PPCR41	Trenton	Gas Producer
PPCR29	Trenton	Gas Producer

Prior to Injection

- Obtain and analyze gas samples
- Recalculate OGIP & RGIP estimates
- Collect and record pressures on Observation Wells and

During Injection Season

- Monitor and record pressure in observation wells (RR9 and C23) on an hourly basis from wellhead telemetry.
- Manually collect and record pressure in observation wells on a monthly basis.
- Meter and record all volumes injected into storage
- Prepare P/z vs measured volume and update and review on a monthly basis
- Identify and investigate deviations from the theoretical curve

During Stabilization Period (Following Injections & Withdrawals)

- Continue to monitor and record pressure in observation wells on a hourly basis
- Manually collect and record pressure in observation wells on a weekly basis.
- The pool will be shut in until pressure stabilization is reached or until the stabilized pool pressure can be reasonably extrapolated
- Maintain separate P/z vs measured inventory plot for stabilized pool pressures (final stabilization point)

During Withdrawal Season

The monitoring procedures during the withdrawal season would remain the same as the injection season with the following exceptions:

• Measure and record all produced fluids

SECTION 6

Environmental Matters

Pipelines

- 1. The Environmental Report ("ER") for this project is found in Section 6-Schedule 1. The ER was prepared in December 2010 by Azimuth Environmental Consulting Inc. A copy of the ER has been sent to the OPCC, local municipalities, the St. Clair Region Conservation Authority, local First Nations and Métis. Directly affected landowners have received a copy of the Executive Summary and will be provided a copy of the ER upon request. A summary of comments received and Union's response to concerns from government agencies and landowners will be filed as part of Section 6-Schedule 2.
- 2. A Public Information Centre was held on October 7, 2010. Landowners, agencies, First Nations and Métis were invited to attend the session by letter of invitation. A newspaper notice was also published in two local newspapers, the Wallaceburg Courier Press on Thursday September 23, 2010 and in the Chatham Daily News on Saturday, September 25, 2010,
- 3. Communications with First Nations and Métis to date has included:

All phone calls made by Manager Government and Aboriginal Affairs, Union Gas

- Walpole Island First Nation: Sept. 27, 2010: called and left a message for the Assistant Consultation Manager, Jared Macbeth. Called Jared Macbeth again Friday Oct. 15, 2010 to discuss the project. Resent copies electronically of the two information letters to Jared Macbeth who could not find the letters';
- Kettle and Stoney Point First Nation: Sept. 27th, 2010: spoke to Lands Manager Anna Batten who will follow up with Chief, no response back to date;
- Caldwell First Nation: Sept. 27th, 2010 left a phone message with the Band Manager Melody Watson. No response to date;

- Moravian of the Thames First Nation: Sept. 27th, 2010 spoke to Lands Manager Ena Jacob who will follow-up with the Chief. No response to date;
- Aamjiwnaang First Nation: Sept. 27th, 2010 left a phone message with the Land Manager Carolyn Nahmanbin. No response to date;
- Métis Nation of Ontario: Sept. 27th, 2010 emailed and spoke to Consultation Manager Brian Tucker who will follow up with local Community councils. No response to date.

Union will continue to communicate with First Nations and the Métis Nation throughout the project.

- 4. Union has discussed the location of all gathering lines with the directly affected landowners and reached an agreement for the location of the pipelines.
- 5. A directly affected landowner is a landowner whose authority is required to use land for construction of the pipelines.
- 6. Mitigation measures were developed between the landowners and Union to protect site-specific features on a landowner's property where gathering lines are to be constructed.
- 7. There is one watercourse crossing associated with the Project which will be installed using Horizontal Directional Drill (HDD).
- 8. Union will comply with all the mitigation measures proposed in the ER.
- 9. All pipelines will be constructed in the manner recommended and described in the Board document "Environmental Guidelines for Locating, Constructing and Operating Hydrocarbon Pipelines in Ontario (2003)".

Well Drilling

- 10. Well drilling issues are discussed in Section 9 of the ER.
- 11. Union will follow the mitigation measures proposed in the ER during well drilling operations.

Compressor Station

12. Union has discussed the location of the compressor station with the directly affected

landowner and has reached an agreement for the location of this facility.

13. All aspects of the compressor station design will be in accordance with Ontario Regulation

210/01 for Oil and Gas Pipeline Systems the Ontario Electrical Safety Code, and the

applicable Ontario Ministry of Environment's standards for air emissions and noise

emissions. This facility will be incorporated into Union's existing Ministry of Environment

Comprehensive Certificate of Approval.

Summary

14. Union will implement its standard water well monitoring program for this project which

involves retaining a qualified hydrogeologist to develop and implement a program for

monitoring all wells that could be affected by construction. The hydrogeologist will be on

retainer throughout the project to address any concerns or complaints should they occur.

15. The most current construction specifications, at the time of construction, will be followed.

16. The total estimated environmental mitigation costs associated with the construction of the

Proposed Facilities are identified in Section 6 - Schedule 3. These costs are identified as

pre-construction related, construction-related and post-construction related. The estimated

total environmental costs are \$208,000.00.

17. Union will apply for all permits that are required. Union will comply with the intent of all

relevant local by-laws.

18. Union will implement a program for environmental inspection. This will ensure that the

recommendations in the ER, any commitments made during the hearing or any conditions of

approval, are implemented. An environmental inspector will monitor construction activities

and ensure that all activities comply with all conditions of approval.

- 19. There will also be a post-construction review. A report will be completed within 15 months after construction that will report on the effectiveness of the mitigation measures implemented during construction. A log of any landowner complaints will be attached to the monitoring report.
- 20. The conclusions of the ER indicate that the environmental and socio-economic effects associated with construction of the Project are generally short-term in nature and minimal. There are no significant cumulative effects as a result of the construction of the project.

Summary of Comments

TO BE FILED WHEN RECEIVED

TOTAL ESTIMATED ENVIRONMENTAL COSTS

JACOB STORAGE POOL PROJECT

Pre-Construction		
Environmental Report Archaeology Soil Sampling Hearing Costs (Environmental Consultant) Surveys (fish, wildlife, plants) Permits	\$ 35,000 15,000 2,500 5,000 7,500 15,000	
Total Pre-Construction	\$	80,000
Construction		
Environmental Inspection/Planning Stream Crossings Site Restoration Water Well Sampling	\$ 10,000 3,000 68,000 25,000	
Total Construction	\$	106,000
Post Construction		
Site Restoration Tree Replacement	\$ 17,000 <u>5,000</u>	
Total Post Construction	\$	22,000
Total Estimated Environmental Costs	\$	208,000

SECTION 7

LAND MATTERS

Storage Land Matters

- 1. Union holds all of the Petroleum and Natural Gas ("P&NG") rights and Gas Storage rights in the Jacob Pool proposed designated storage area ("DSA"). The landowners with leases have received, and are continuing to receive, all payments required under these agreements.
- 2. After the Jacob Pool has been developed for gas storage, Union will administer and maintain the annual rental payments to all affected landowners.
- 3. Negotiations with landowners for a determination of the payment for P&NG and Gas Storage Agreement rentals, including an additional acreage rental, well and roadway payments, and the remaining residual gas are at varying stages of completion as noted in the adjoining pool summaries. If negotiations are not concluded prior to injection, an offer will be made in accordance with the terms of the Gas Storage Agreements prior to the date of injection.
- 4. The offer of purchase for residual gas will be extended to the landowners within the proposed DSA with a participating interest in residual gas as established in the Unit Operation Agreements or the Unit Operation Amending Agreement as applicable.
- 5. Union proposes to offer a compensation package to the landowners that are consistent with Union's existing Gas Storage Landowner Compensation Program. The combined P&NG and Gas Storage Lease rentals for inside acres will be \$115.68 per acre. The specific components of the offer are as follows:

P&NG Lease Rental:
Gas Storage Lease Rental:
Combined Rental:

\$ 25.15 per acre \$ 90.53 per acre \$ 115.68 per acre 6. The offer for well and outside acreage rental payments are as follows:

Gas Storage Well Payment:	\$ 1,313.37 per well
P&NG Lease Rental:	\$ 25.15 per acre
Gas Storage Lease Rental:	\$ 9.58 per acre
Combined Storage:	\$ 34.73 per acre

Note: These payments are currently adjusted annually by the Consumer Price Index for the preceding July 1 to June 30 period.

7. Outside acres result when the acreage held by a single deed or lease are severed by the DSA boundary resulting in some acres being inside the DSA and some acres being outside the DSA boundary.

Jacob Pool

- 8. The metes and bounds description of the proposed Jacob Pool DSA is described in Section 7-Schedule 1.
- 9. Section 7-Schedule 2 identifies the property owners and the holder of the P&NG agreements for each property within the proposed Jacob Pool DSA. Section 7-Schedule 3 identifies the property owners and the holder of the Gas Storage Agreements for each property within the proposed DSA. Section 7-Schedule 4 lists all of the landowners for each property within the proposed Jacob Pool DSA. The Property Agreement Summary, copies of the P&NG Lease Agreements and copies of the Gas Storage Leases as applicable for each property within the proposed DSA are filed as Tabs 1 to 22 inclusive.
- 10. Union holds all of the P&NG rights.
- 11. Union holds all of the Gas Storage Lease rights.
- 12. There are no recoverable reserves.
- 13. The Jacob Pool landowners with acreage inside the existing Unit Area currently receive annual P&NG rentals. After project approval, but before injection, Union proposes to negotiate and execute Amending Agreements Schedule of Payments with all landowners to alter the payment structure of the existing agreements to match the compensation package

paid to landowners within Union's existing storage pools as referred to in paragraphs 5 and 6 of this section.

NPS 8 Transmission Pipeline

- 14. The proposed NPS 8 transmission pipeline connects the Jacob Pool to the Panhandle system.
- 15. Union requires approximately 1.474 hectares of permanent transmission easement for the proposed pipeline. Section 7-Schedule 5 lists the names and addresses of all affected landowners and the dimensions of the permanent transmission easements required. As of the date of filing, Options for 2 of the 3 permanent transmission easements have been obtained.
- 16. Union's Grant of Easement form is attached as Section 7-Schedule 6.
- 17. Union will require approximately 0.868 hectares of temporary land use for the proposed construction. The affected landowners and dimensions of temporary land use are also outlined in Section 7-Schedule 5. These agreements are for a period of two years. This period allows Union an opportunity to return following construction to perform further clean-up work as required.
- 18. At the conclusion of construction, Union will seek a Full and Final Release from each of the directly affected landowners. This Release covers any compensation for actual damages resulting from the pipeline construction.

Well Drilling, Roads and Gathering Lines

19. Union requires approximately 0.524 hectares of easements for the gathering pipeline and approximately 2.367 hectares of temporary land use for construction of the gathering pipeline. Section 7-Schedule 7 lists the names and addresses of all of the affected landowners and the dimensions required for roadways, well pads and gathering easements as well as the area required for temporary land use.

- 20. Drilling of wells, construction of roadways, and construction of gathering pipelines within the proposed DSA will be undertaken pursuant to existing Storage Lease Agreements with the landowners in conjunction with the signed Letters of Acknowledgement.
- 21. In the Jacob Pool, wells will be drilled on the four properties. The location of wells can be found in Section 4-Schedule 1.
- 22. Permanent all-weather roadways are required to accommodate vehicular traffic to the existing and proposed well locations and will be used on an ongoing basis during and following construction. These access roads will be used where possible for construction and maintenance of the gathering pipelines in order to minimize environmental disturbance. The location of the access roads is shown in Section 7-Schedule 8.
- 23. Letters of Acknowledgement stating that there is no objection to the commencement of drilling of the wells and construction of the permanent all-weather access roads in the locations proposed have been presented to each landowner. Signed Letters of Acknowledgment have been received and are included as Section 7-Schedule 9. Union expects to have signed Letters of Acknowledgement from all parties prior to construction.
- 24. Although Union has the authority it requires to install the gathering lines pursuant to the existing Storage Lease Agreements, Union will secure easements for the gathering lines in order to clearly define their location and register them on title. Union's Grant of Easement form is attached as Section 7-Schedule 6. Union will obtain these easements after construction.
- 25. Compensation for all crop damage and other surface impacts from the construction of wells, pipeline, and roadways will be paid to the landowner or tenant farmer where applicable. At the conclusion of construction, Union will seek a Full and Final Release from each of the directly affected landowners or tenant farmers.

Landowner Contacts

26. Union has implemented a comprehensive program to provide landowners, tenants, and other interested persons with information regarding the proposed development. Project information was distributed through correspondence and individual meetings.

Construction Monitoring and Follow-Up

- 27. During the construction phase, Union will arrange for a Landowner Relations Agent to be available to ensure that commitments made to the landowners are fulfilled and to address questions or concerns of the landowners. In addition, any complaint received by Union related to the construction will be recorded and monitored to ensure follow-up. This process assists in resolving complaints and fulfilling commitments.
- 28. After construction, negotiations with landowners continue where necessary to settle any damages that were not foreseen or compensated for prior to construction.

ALL AND SINGULAR that certain parcel or tract of land in the Geographical Township of Dover, now in the Municipality of Chatham-Kent and being composed of part of Lots 4 and 5, Concession 5 and part of Lots 4, 5, 6 and 7, Concession 4, part of the road allowance between Lots 5 and 6, Concession 4 and part of the road allowance between Concession 4 and 5 all in the Geographical Township of Dover, now in the Municipality of Chatham-Kent, which said parcel may be more particularly described as follows...

COMMENCING at the north-westerly corner of Lot 4, Concession 4. Thence south-easterly along the line between Lots 3 and 4, on a bearing of south 41 degrees 20 minutes and 10 seconds east, a distance of 345.50 metres to the line between the north and south half of the north half of Lot 4, Concession 4;

THENCE north-easterly along the line between the north and south half of the north half of Lot 4 Concession 4, on a bearing of north 48 degrees 56 minutes and 30 second east, a distance of 618.92 metres to the line between Lots 4 and 5, Concession 4;

THENCE south-easterly along the line between Lots 4 and 5, Concession 4 on a bearing of south 41 degrees 41 minutes 40 seconds east, a distance of 346.83 metres to the line between the north and south half of Lot 5, Concession 4;

THENCE north-easterly along the line between the north and south half of Lot 5, Concession 4, on a bearing of north 48 degrees 18 minutes and 0 seconds east, a distance of 313.35 metres to the line between the east and west half of Lot 5, Concession 4;

THENCE south-easterly along the line between the east and west half of Lot 5, Concession 4 on a bearing of south 41 degrees 26 minutes 20 seconds east, a distance of 345.22 metres to the line between the north and south half of the south half of Lot 5, Concession 4;

THENCE north-easterly along the line between the north and south half of the south half of Lot 5, Concession 4, continuing across the road allowance between Lots 5 and 6, Concession 4, and continuing on the line between the north and south half of the south half of Lot 6, Concession 4, on a bearing of north 48 degrees 5 minutes and 50 seconds east, a distance of 646.84 metres to the line between the east and west half of Lot 6, Concession 4;

THENCE south-easterly along the line between the east and west half of Lot 6, Concession 4, on a bearing of south 41 degrees 59 minutes 30 seconds east, a distance of 345.42 metres to a point in the northerly limit of the road allowance between Concessions 3 and 4 being Pain Court Line;

THENCE north-easterly along the northerly limit of the road allowance between Concessions 3 and 4 being Pain Court Line on a bearing of north 48 degrees 17 minutes 40 seconds east, a distance of 952.84 metres to the south easterly corner of Lot 7, Concession 4;

THENCE north-westerly along the line between Lots 7 and 8, Concession 4, on a bearing of north 41 degrees 31 minutes and 30 seconds west, a distance of 677.36 metres to the line between the north and south half of Lot 7, Concession 4;

THENCE south-westerly along the line between the north and south half of Lot 7, Concession 4, on a bearing of south 48 degrees 50 minutes 10 seconds west, a distance of 315.83 metres to the line between the east and west half of Lot 7, Concession 4;

THENCE north-westerly along the line between the east and west half of Lot 7, Concession 4, on a bearing of north 41 degrees 31 minutes 30 seconds west, a distance of 342.04 metres to the line between the north and south half of the north half of Lot 7, Concession 4;

THENCE south-westerly along the line between the north and south half of the north half of Lot 7, Concession 4 and continuing on along the line between the north and south half of the north half of Lot 6, Concession 4, on a bearing of south 48 degrees 50 minutes 10 seconds west, a distance of 641.42 metres to the line between the east and west half of Lot 6, Concession 4;

THENCE north-westerly along the line between the east and west half of Lot 6, Concession 4, on a bearing of north 41 degrees 29 minutes 10 seconds west, a distance of 342.04 metres to the southerly limit of the road allowance between Concessions 4 and 5, being Maple Line.

THENCE south-westerly along the southerly limit of the road allowance between Concessions 4 and 5, being Maple Line, on a bearing of south 48 degrees 53 minutes 40 seconds west, a distance of 340.25 metres to a point in the southerly limit of said road allowance in the northerly limit of Lot 5, Concession 4;

THENCE north-westerly crossing the road allowance between Concessions 4 and 5, being Maple Line and continuing along the widened limit of the road allowance between Lots 5 and 6, Concession 5, on a bearing of north 40 degrees 17 minutes and 20 seconds west, a distance of 369.05 metres to a point in that widened limit to the line between the north and south half of the south half of Lot 5, Concession 5;

THENCE south-westerly along the line between the north and south half of the south half of Lot 5, Concession 5, on a bearing of south 48 degrees 59 minutes 50 seconds west, a distance of 298.41 metres to a point in the east and west half of Lot 5, Concession 5;

THENCE north-westerly along the line between the east and west half of Lot 5, Concession 5, on a bearing of north 41 degrees 1 minute 40 seconds west, a distance of 344.56 metres to a point in the southerly limit of Given Line;

THENCE south-westerly along the southerly limit of Given Line, on a bearing of south 48 degrees 59 minutes 50 seconds west, a distance of 921.90 metres to the line between Lots 3 and 4, Concession 5;

THENCE south-westerly along the line between Lots 3 and 4, Concession 5, on a bearing of south 41 degrees 10 minutes 10 seconds east, a distance of 694.92 metres to the south-west corner of Lot 4, Concession 5;

THENCE southerly crossing the road allowance between Concessions 4 and 5, being Maple Line, on a bearing of south 7 degrees 54 minutes 0 seconds west, a distance of 30.64 metres to the point of commencement.



-			
Lands File	No.:		
Cheque No	o.:		
Project:			
Acct No.:			

PIPELINE EASEMENT

(the "Easement")

Between

(herein called the "Transferor")

and

UNION GAS LIMITED (herein called the "Transferee")

This Fasement is an easement in Gross

WHEREAS the Transferor is the owner in fee simple of those lands and premises more particularly described as: PIN: Insert Legal (hereinafter called the "Transferor's Lands").

The Transferor does hereby GRANT, CONVEY, TRANSFER AND CONFIRM unto the Transferee, its successors and assigns, to be used and enjoyed as appurtenant to all or any part of the lands of the Transferee's lands the right, liberty, privilege and easement on, over, in, under and/or through a strip of the Transferor's Lands more particularly described as being PIN: Insert Legal Being Part of the PIN (hereinafter referred to as the "Lands") to survey, lay, construct, maintain, inspect, patrol, alter, remove, replace, reconstruct, repair, move, keep, use and/or operate one Pipe line for the transmission of pipeline quality natural gas as defined in The Ontario Energy Board Act S.O. 1998 (hereinafter referred to as the "Pipeline") including therewith all such buried attachments, equipment and appliances for cathodic protection which the Transferee may deem necessary or convenient thereto, together with the right of ingress and egress at any and all times over and upon the Lands for its servants, agents, employees, those engaged in its business, contractors and subcontractors on foot and/or with vehicles, supplies, machinery and equipment for all purposes necessary or incidental to the exercise and enjoyment of the rights, liberty, privileges and easement hereby granted. The Parties hereto mutually covenant and agree each with the other as follows:

-) of lawful money of Canada (hereinafter called 1. In consideration of the sum of DOLLARS (\$ the "Consideration"), which sum is payment in full for the rights and interest hereby granted and for the rights and interest, if any, acquired by the Transferee by expropriation, including in either or both cases payment in full for all such matters as injurious affection to remaining lands and the effect, if any, of registration on title of this document and where applicable, of the expropriation documents, subject to Clause 12 hereof to be paid by the Transferee to the Transferor within 90 days from the date of these presents or prior to the exercise by the Transferee of any of its rights hereunder other than the right to survey (whichever may be the earlier date), the rights, privileges and easement hereby granted shall continue in perpetuity or until the Transferee, with the express written consent of the Transferor, shall execute and deliver a surrender thereof. Prior to such surrender Transferee shall remove all debris as may have resulted from the Transferee's use of the Lands from the Lands and in all respects restore the Lands to it's previous productivity and fertility so far as is reasonably possible, save and except for items in respect of which compensation is due under Clause 2. hereof. Transferor and Transferee hereby agree that nothing herein shall oblige Transferee to remove the Pipeline from the Lands as part of Transferee's obligation to restore the Lands.
- 2. The Transferee shall make to the Transferor (or the person or persons entitled thereto) due compensation for any damages to the Lands resulting from the exercise of any of the rights herein granted, and if the compensation is not agreed upon by the Transferee and the Transferor, it shall be determined by arbitration in the manner prescribed by the Expropriations Act, R.S.O. 1990, Chapter E-26 or any Act passed in amendment thereof or substitution therefore. Any gates, fences and tile drains curbs, gutters, asphalt paving, lockstone, patio tiles interfered with by the Transferee shall be restored by the Transferee at its expense as closely as reasonably possible to the condition and function in which they existed immediately prior to such interference by the Transferee and in the case of tile drains, such restoration shall be performed in accordance with good drainage practice and applicable government regulations.
- 3. The Pipeline (including attachments, equipment and appliances for cathodic protection but excluding valves, take-offs and fencing installed under Clause 9 hereof) shall be laid to such a depth that upon completion of installation it will not obstruct the natural surface run-off from the Lands nor ordinary cultivation of the Lands nor

any tile drainage system existing in the Lands at the time of installation of the Pipeline nor any planned tile drainage system to be laid in the Lands in accordance with standard drainage practice, if the Transferee is given at least thirty (30) days notice of such planned system prior to the installation of the pipeline; provided that the Transferee may leave the Pipeline exposed in crossing a ditch, stream, gorge or similar object where approval has been obtained from the Ontario Energy Board or other Provincial Board or authority having jurisdiction in the premises. The Transferee agrees to make reasonable efforts to accommodate the planning and installation of future tile drainage systems following installation of the pipeline so as not to obstruct or interfere with such tile installation.

- 4. As soon as reasonably possible after the construction of the Pipeline, the Transferee shall level the Lands and unless otherwise agreed to by the Transferor, shall remove all debris as may have resulted from the Transferee's use of the Lands therefrom and in all respects restore the Lands to its previous productivity and fertility so far as is reasonably possible, save and except for items in respect of which compensation is due under Clause 2 hereof.
- 5. The Transferee shall indemnify the Transferor for any and all liabilities, damages, costs, claims, suits and actions which are directly attributable to the exercise of the rights hereby granted, except to the extent of those resulting from the gross negligence or wilful misconduct of the Transferor.
- 6. In the event that the Transferee fails to comply with any of the requirements set out in Clause 2, 3, or 4 hereof within a reasonable time of the receipt of notice in writing from the Transferor setting forth the failure complained of, the Transferee shall compensate the Transferor (or the person or persons entitled thereto) for any damage, if any, necessarily resulting from such failure and the reasonable costs if any, incurred in the recovery of those damages.
- 7. Except in case of emergency, the Transferee shall not enter upon any of the Transferor's Lands, other than the Lands, without the consent of the Transferor. In case of emergency the right of entry upon the Transferor's Lands for ingress and egress to and from the Lands is hereby granted. The determination of what circumstances constitute an emergency, for purposes of this paragraph is within the absolute discretion of the Transferee, but is a situation in which the Transferee has a need to access the pipeline in the public interest without notice to the Transferor, subject to the provisions of paragraph 2 herein. The Transferee will, within 72 hours of entry upon such lands, advise the Transferor of the said emergency circumstances and thereafter provide a written report to Transferor with respect to the resolution of the emergency situation. The Transferee shall restore the lands of the Transferor at its expense as closely as reasonably practicable to the condition in which they existed immediately prior to such interference by the Transferee and in the case of tile drains, such restoration shall be performed in accordance with good drainage practice.
- 8. The Transferor shall have the right to fully use and enjoy the Lands except for planting trees over the lesser of the Lands or a six (6) metre strip centered over the Pipeline, and except as may be necessary for any of the purposes hereby granted to the Transferee, provided that without the prior written consent of the Transferee, the Transferor shall not excavate, drill, install, erect or permit to be excavated, drilled, installed or erected in, on, over or through the Lands any pit, well, foundation, pavement, building, mobile homes or other structure or installation. Notwithstanding the foregoing the Transferee upon request shall consent to the Transferor erecting or repairing fences, hedges, pavement, lockstone constructing or repairing tile drains and domestic sewer pipes, water pipes, and utility pipes and constructing or repairing lanes, roads, driveways, pathways, and walks across, on and in the Lands or any portion or portions thereof, provided that before commencing any of the work referred to in this sentence the Transferor shall (a) give the Transferee at least (30) clear days notice in writing describing the work desired so as to enable the Transferee to evaluate and comment on the work proposed and to have a representative inspect the site and/or be present at any time or times during the performance of the work, (b) shall follow the instructions of such representative as to the performance of such work without damage to the Pipeline, (c) shall exercise a high degree of care in carrying out any such work and, (d) shall perform any such work in such a manner as not to endanger or damage the Pipeline as may be required by the Transferee.
- 9. The rights, privileges and easement herein granted shall include the right to install, keep, use, operate, service, maintain, repair, remove and/or replace in, on and above the Lands any valves and/or take-offs subject to additional agreements and to fence in such valves and/or take-offs and to keep same fenced in, but for this right the Transferee shall pay to the Transferor (or the person or persons entitled thereto) such additional compensation as may be agreed upon and in default of agreement as may be settled by arbitration under the provisions of The Ontario Energy Board Act, S.O. 1998, or any Act passed in amendment thereof or substitution therefore. The Transferee shall keep down weeds on any lands removed from cultivation by reason of locating any valves and/or take-offs in the Lands.
- 10. Notwithstanding any rule of law or equity and even though the Pipeline and its appurtenances may become annexed or affixed to the realty, title thereto shall nevertheless remain in the Transferee.
- 11. Neither this Agreement nor anything herein contained nor anything done hereunder shall affect or prejudice the Transferee's rights to acquire the Lands or any other portion or portions of the Transferor's lands under the provisions of The Ontario Energy Board Act, S.O. 1998, or any other laws, which rights the Transferee may exercise at its discretion in the event of the Transferor being unable or unwilling for any reason to perform this Agreement or give to the Transferee a clear and unencumbered title to the easement herein granted.
- 12. The Transferor covenants that he has the right to convey this easement notwithstanding any act on his part, that he will execute such further assurances of this easement as may be requisite and which the Transferee may at its expense prepare and that the Transferee, performing and observing the covenants and conditions on its part

to be performed, shall have quiet possession and enjoyment of the rights, privileges and easement hereby granted. If it shall appear that at the date hereof the Transferor is not the sole owner of the Lands, this Indenture shall nevertheless bind the Transferor to the full extent of his interest therein and shall also extend to any after-acquired interest, but all moneys payable hereunder shall be paid to the Transferor only in the proportion that his interest in the Lands bears to the entire interest therein.

- 13. In the event that the Transferee fails to pay the consideration as hereinbefore provided, the Transferor shall have the right to declare this easement cancelled after the expiration of 15 days from personal service upon the Secretary, Assistant Secretary or Manager, Lands Department of the Transferee at its Executive Head Office in Chatham, Ontario, (or at such other point in Ontario as the Transferee may from time to time specify by notice in writing to the Transferor) of notice in writing of such default, unless during such 15 day period the Transferee shall pay the said consideration; upon failing to pay as aforesaid, the Transferee shall forthwith after the expiration of 15 days from the service of such notice execute and deliver to the Transferor at the expense of the Transferee, a valid and registerable release and discharge of this easement.
- 14. All payments under these presents may be made either in cash or by cheque of the Transferee and may be made to the Transferor (or person or persons entitled thereto) either personally or by mail. All notices and mail sent pursuant to these presents shall be addressed to the Transferor at and to the Transferee at Union Gas Limited, P.O.Box 2001, 50 Keil Drive North, Chatham, Ontario N7M 5M1. Attention: Manager, Lands or to such other address in either case as the Transferor or the Transferee respectively may from time to time appoint in writing.
- The rights, privileges and easement hereby granted are and shall be of the same force and effect as a covenant running with the land and this Indenture, including all the covenants and conditions herein contained, shall extend to, be binding upon and enure to the benefit of the heirs, executors, administrators, successors and assigns of the Parties hereto respectively; and, wherever the singular or masculine is used it shall, where necessary, be construed as if the plural, or feminine or neuter had been used, as the case may be.
- 16. The Transferor hereby acknowledges that this transfer will be registered electronically and the Transferor hereby authorizes the Transferee to complete the registration of this transfer.

DATED this	day of	January	2010
			Name & Title:
			I have authority to bind the corporation
			Name & Title:
			I have authority to bind the corporation
			Address:
			UNION GAS LIMITED
			Name: Mervyn R. Weishar Senior Lands Agent
			I have authority to bind the Corporation
			Additional Information: (if applicable)
			Solicitor:
			Telephone:

Municipality of Chatham-Kent

Province of Ontario

DECLARATION REQUIRED UNDER SECTION 50 OF THE PLANNING ACT, R.S.O. 1990, as amended

I, Mervyn R. Weishar, of the City of Municipality of Chatham-Kent , in the Province of Ontario.

DO SOLEMNLY DECLARE THAT

- 1. I am, Senior Lands Agent Lands Department of Union Gas Limited, the Transferee in the attached Grant of Easement and as such have knowledge of the matters herein deposed to.
- 2. The use of or right in the land described in the said Grant of Easement is being acquired by Union Gas Limited for the purpose of a hydrocarbon transmission line within the meaning of part VI of the Ontario Energy Board Act , 1998.

AND I make this solemn declaration conscientiously believing it to be true and knowing that it is of the same force and effect as if made under oath, and by virtue of The Canada Evidence Act.

DECLARED before me at the Municipality of Chatham-Kent, in the Province of Ontario

this day of January ,2010

A Commissioner, etc.