Godwin Pumps® Temporary Road Ramps

For use with 4-, 6-, 8-, 12-, 18- and 24-inch pipelines, Godwin road ramps provide a temporary crossing for low-traffic industrial, mining, commercial and residential areas where providing vehicular access over a pipeline is required.

Providing everything from pumps, valves and hoses to light towers, generators and road ramps, Godwin Pumps can completely outfit your temporary and long-term project site needs.

Features

- Sturdy structural steel construction.
- Passable vehicle width of 12 feet (15 feet for 24-inch model).
- Low profile for easy crossing.
- Capable of passing solids and fitted with 150 lb. flanged inlet and outlet connections.
- Drain valve provides capability to drain ramp after use.
- Sturdy, stackable construction enables easy storage.

godwin pumps®

Applications

Godwin Pumps road ramps are designed to provide easy crossing of a pipeline in low-traffic areas and can be used in a series to re-route traffic patterns.

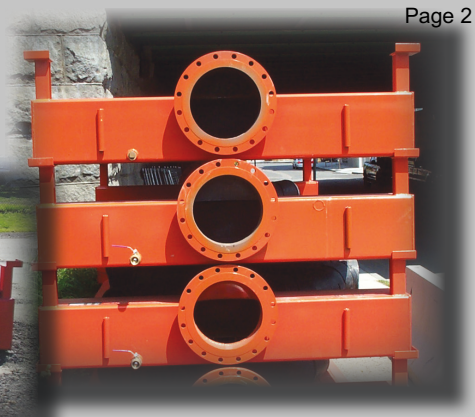

Drawing

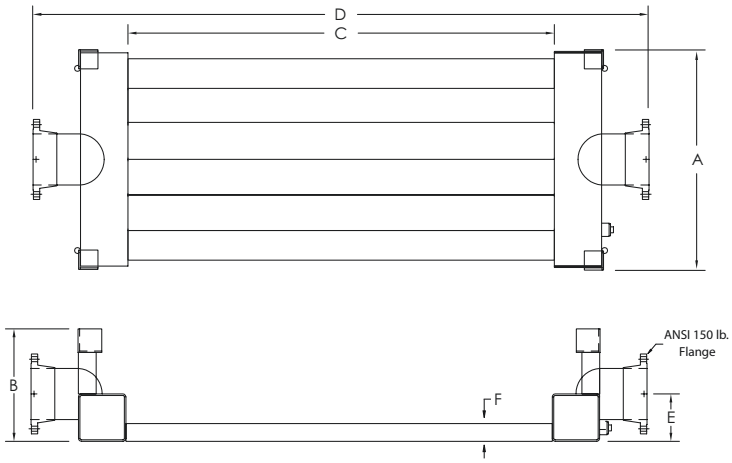

Size	A	B	C	D	E	F	Max. Capacity (GPM)	Solids Passing	Approx. Weight (lbs.)	Est. Equiv. Length	Pressure Rating (psi)
4"	24¾"	14½"	144"	166"	6⅛"	3"	500	2½"	650	60'	100
6"	30¾"	15½"	144"	172"	6⅛"	3"	1,000	2½"	850	90'	75
8"	36½"	19"	144"	176"	8"	3"	2,000	2½"	1,900	120'	50
12"	61"	24"	144"	180½"	10½"	3"	4,000	2½"	2,300	180'	50
18"	95"	30¼"	144"	188½"	13⅝"	4"	7,000	3½"	5,000	270'	25
24"	98"	36"	180"	233"	18"	6"	12,000	3½"	7,000	360'	25

- Maximum load capacity of 21,600 pounds per axle.
- Maximum crossing speed is 5 MPH.

Godwin Pumps of America, Inc.
One Floodgate Road
Bridgeport, NJ 08014 USA
(856) 467-3636 • Fax: (856) 467-4841
Email: sales@godwinpumps.com
www.godwinpumps.com

godwin pumps®

© Copyright 2009 Godwin Pumps of America, Inc.
Godwin Pumps and the color orange for pumps are registered trademarks of Godwin Pumps of America, Inc. Specifications and illustrations are subject to revision without notice.